

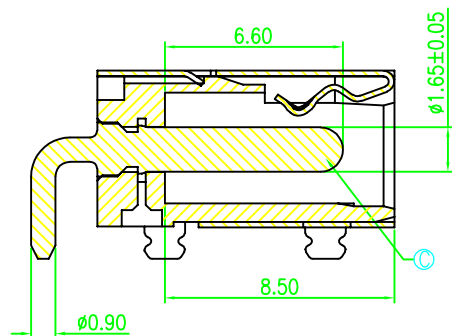




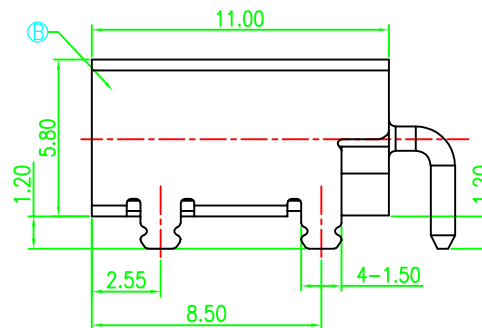


SECTION A-A




SPECIFICATION:

1. RATING: DC 20V 5A
2. CONTACT RESISTANCE: 30mΩ MAX.
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 5N~30N
6. EXTRACTION FORCE: 5N~30N
7. DURABILITY: 10,000 CYCLES

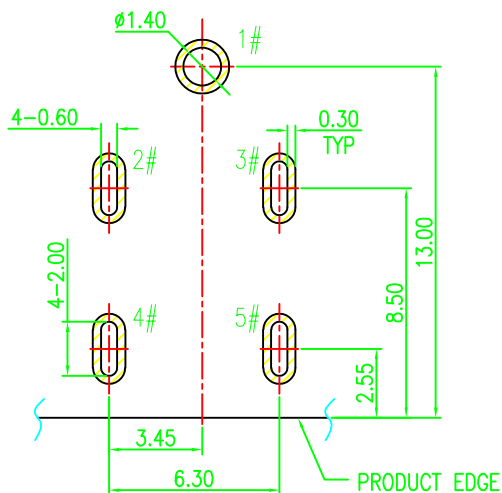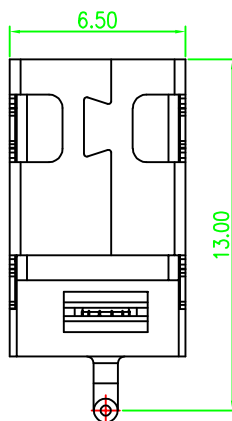

RECOMMENDED PCB LAYOUT(T=1.00)
TOP VIEW TOLERANCE:±0.05

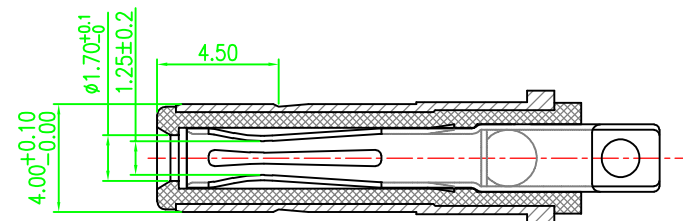

MATING PLUG
DP400170-0038-60000H

SCHEMATIC	C	CENTER PIN	BRASS	GOLD FLASH"/Ni 40u"	1
	B	SHELL	COPPER ALLOY	Ni 40u"	1
	A	HOUSING	HIGH TEMP.THERMOPLASTIC	BLACK	1
NO.	DESCRIPTION	MATERIAL		REMARKS	QTY

1# (+)
2# / 3# 4# / 5# (-)

UNLESS OTHERWISE
SPECIFIED TOLERANCES

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.



DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
x.	±0.50	x.	±2°
x.x	±0.30	x.x	±1°
x.xx	±0.20	x.xx	—
x.xxx	±0.10	x.xxx	—
3RD ANGLE PROJECTION		UNIT: mm	

DESIGN:	Tony
CHECK:	
APPROVED	Andy-liu
	2021.9.30


PART NAME:	Φ4.0板上型
	DC POWER JACK
PART NO.	DC400170-0911-20000H
SHEET: 1/1	REV.: A1
DRAWING NO	

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

拉出方向

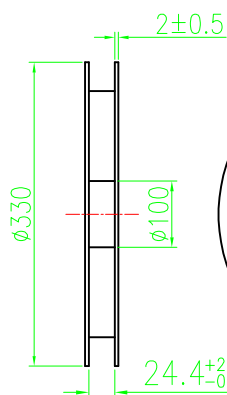


拉出方向



包装盘:外径 $\phi 330$;内径 $\phi 100$

覆盖带 350mm 最少.

拉出方向



尾端(空20格最少)

产品

前端(空20格最少)

备注:

- 材料规格:
 - 载带: $T=0.50\text{mm}$, 黑色
 - 包装盘: 蓝色
 - 纸箱: $L=335, W=335, H=300$
- 包装数量:
700PCS/卷, 10卷(7000PCS)/箱
- 上盖带拨离力: $0.1\text{N}\sim 0.7\text{N}$ (10~70gf);
拨离角度: $165^\circ\sim 180^\circ$;
拨离速度: 300mm/分钟.


包装盘标签

总共10层

PE袋:

外箱, 1PCS

透明胶带

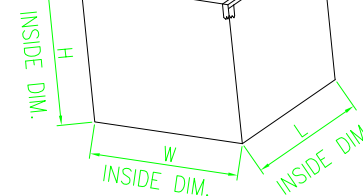

UNLESS OTHERWISE
SPECIFIED TOLERANCES

XGB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	—	X.	—
X.X	—	X.X	—
X.XX	—	X.XX	—
X.XXX	—	X.XXX	—

3RD ANGLE PROJECTION

DESIGN:	Tony
CHECK:	
APPROVED	Andy-Liu
UNIT:	mm

PART NAME:	Φ4.0 板上型
PART NO.	XB-DC400170-0911-20000H
SHEET: 1/1	REV.: A
DRAWING NO	

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------