


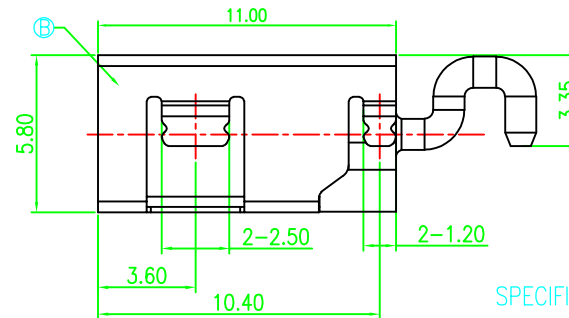


SECTION A-A

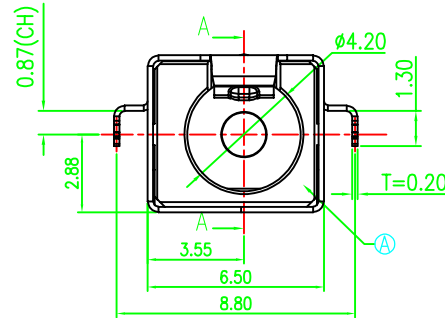


SPECIFICATION:


1. RATING: DC 20V 7A
2. CONTACT RESISTANCE: 30mΩ MAX.
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 3N~30N
6. EXTRACTION FORCE: 3N~30N
7. DURABILITY: 5,000 CYCLES

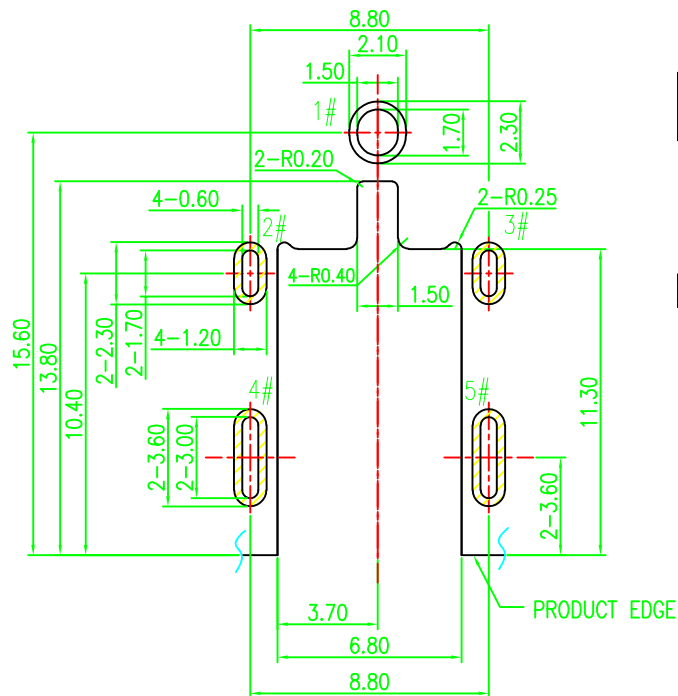

RECOMMENDED PCB LAYOUT(t=1.00)
TOP VIEW TOLERANCE:±0.05

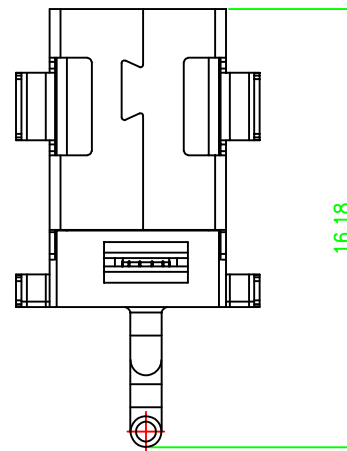



SCHEMATIC	
	1#(+)
	2#/3#4#/5#(-)

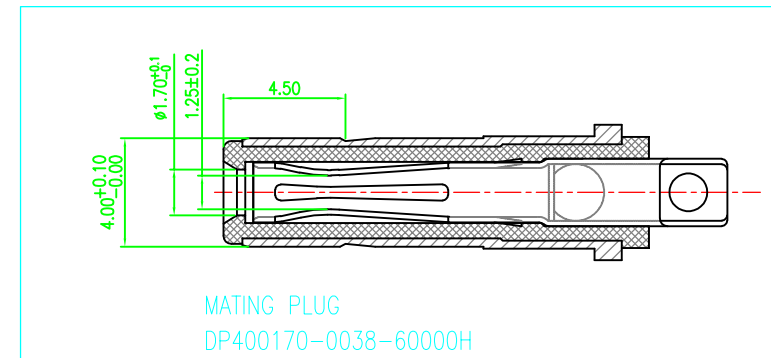

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
C	CENTER PIN	BRASS	GOLD FLASH"/Ni 40u"	1
B	SHELL	COPPER ALLOY	Ni 40u"	1
A	HOUSING	HIGH TEMP.THERMOPLASTIC	BLACK	1

UNLESS OTHERWISE SPECIFIED TOLERANCES		XIB 东莞市溪榜电子有限公司	
DECIMALS:		DONG GUAN XI BANG ELECTRONICS CO., LTD.	
DIM	TOL	DESIGN:	Tony
X.	±0.50	2022.4.22	
X.X	±0.30	CHECK:	
X.XX	±0.20		
X.XXX	±0.10	APPROVED	Andy
3RD ANGLE PROJECTION		2022.4.22	
UNIT: mm		PART NAME:	
		Φ4.0沉板式 (CH=-0.87)	
		DC POWER JACK	
		PART NO.	
		XB-DC400170-1092-20000H	
		SHEET: 1/1 REV.: A1	
		DRAWING NO	

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

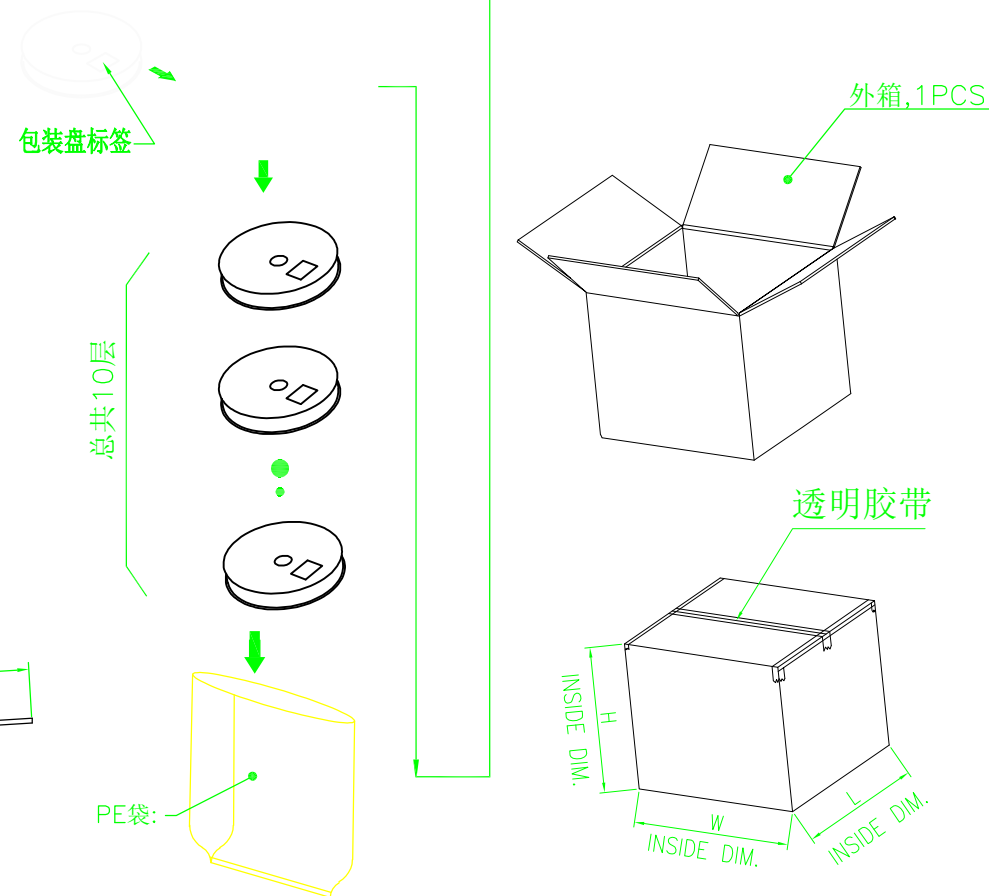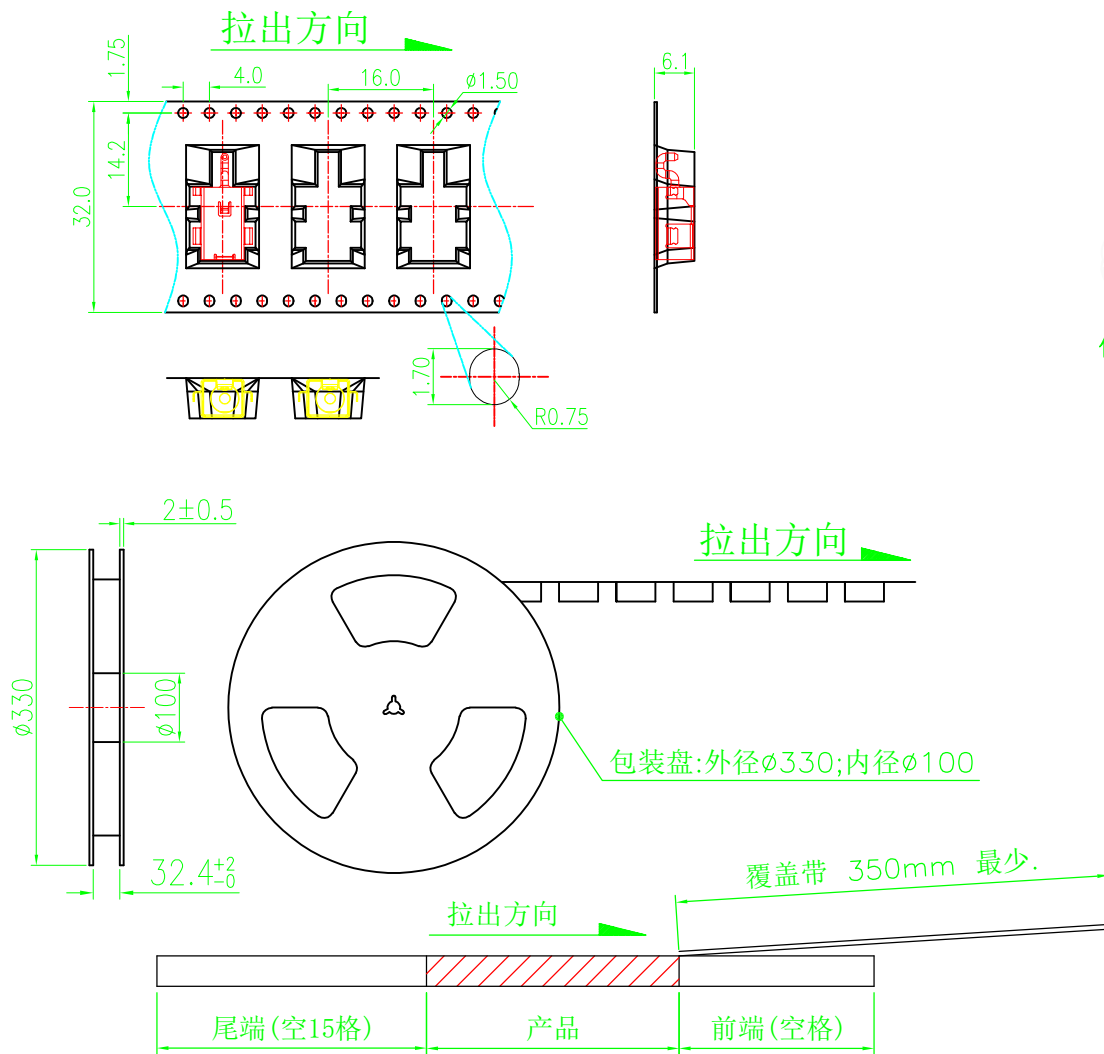

备注:

- 材料规格:
 - 载带:T=0.50mm,黑色
 - 包装盘:蓝色
 - 纸箱: L=335,W=335,H=380
- 包装数量:
600PCS/卷, 10卷(6000PCS)/箱
- 上盖带拔离力: 0.1N~0.7N(10~70gf);
拔离角度: 165°~180°;
拔离速度: 300mm/分钟.

UNLESS OTHERWISE SPECIFIED TOLERANCES				XGB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME:	
DIM	TOL	DIM	TOL		2022.4.22	$\phi 4.0$ 沉板式(CH=-0.87) DC POWER JACK-包装图	
x.	///	x.	///	CHECK:		PART NO.	
x.x	///	x.x	///			XB-DC400170-1092-20000H	
x.xx	///	x.xx	///			SHEET: 1/1	
x.xxx	///	x.xxx	///			REV.: A	
3RD ANGLE PROJECTION		UNIT: mm		APPROVED	Andy-Liu	DRAWING NO	
					2022.4.22		

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------