

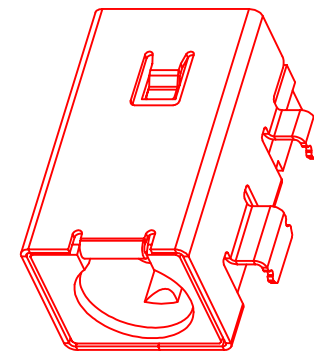
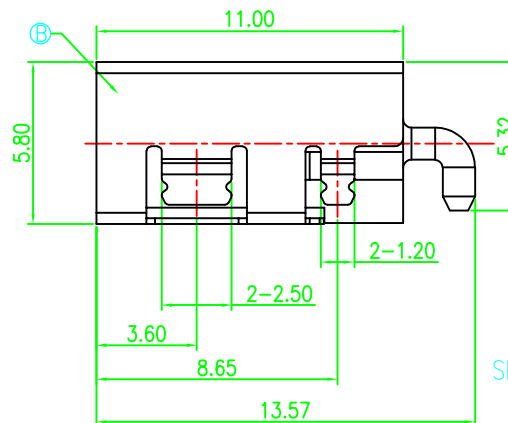
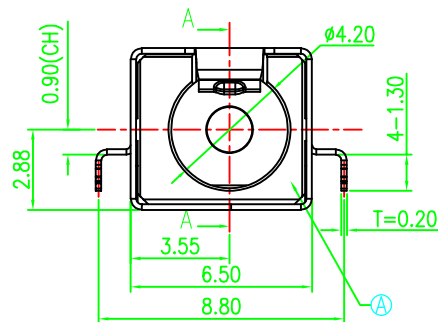


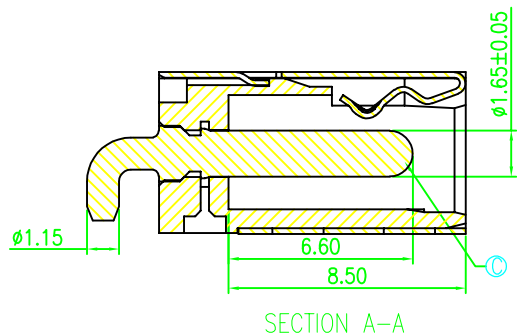


SPECIFICATION:

1. RATING: DC 20V 7A
2. CONTACT RESISTANCE: 30mΩ MAX.
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 3N~30N
6. EXTRACTION FORCE: 3N~30N
7. DURABILITY: 5,000 CYCLES

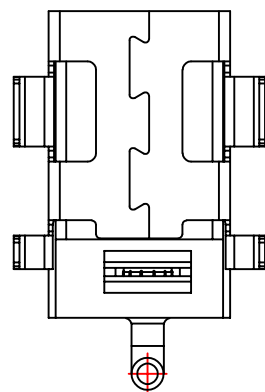


SCHEMATIC

- 1# (+)
- 2# / 3# 4# / 5# (-)

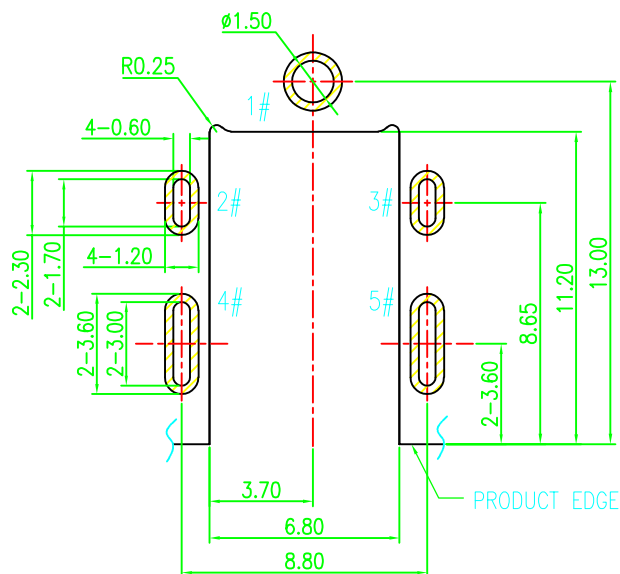

RECOMMENDED PCB LAYOUT (t=1.00)
TOP VIEW TOLERANCE: ±0.05

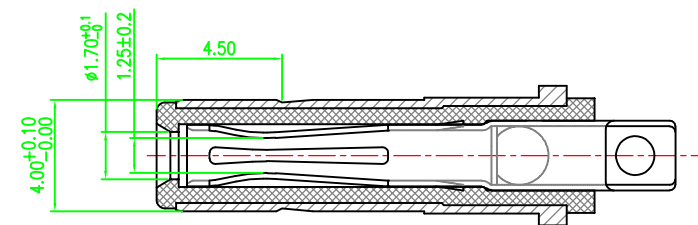

MATING PLUG
DP400170-0038-60000H







C	CENTER PIN	BRASS	GOLD FLASH"/Ni 40u"	1
B	SHELL	COPPER ALLOY	Ni 40u"	1
A	HOUSING	HIGH TEMP.THERMOPLASTIC	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

UNLESS OTHERWISE
SPECIFIED TOLERANCES

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME:	
DIM	TOL	DIM	TOL	CHECK:	2022.4.22	Φ4.0沉板式 (CH=0.90)	
X.	±0.50	X.	±2°		DC POWER JACK		
X.X	±0.30	X.X	±1°		PART NO.		
X.XX	±0.20	X.XX			XB-DC400170-1093-20000H		
X.XXX	±0.10	X.XXX		APPROVED	Andy	SHEET: 1/1 REV.: A1	
		UNIT: mm			2022.4.22	DRAWING NO	

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

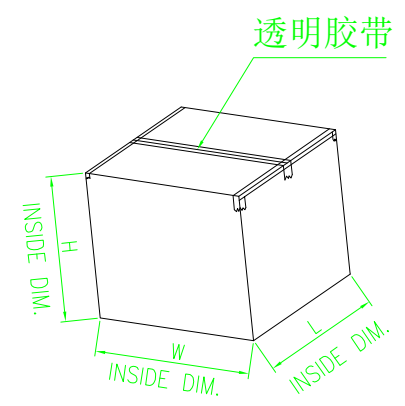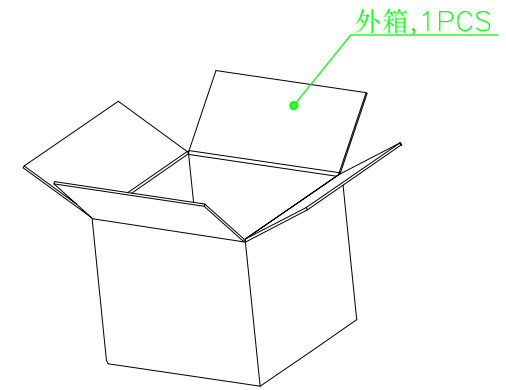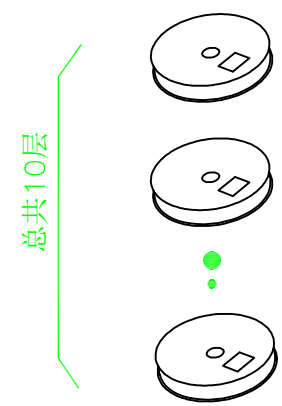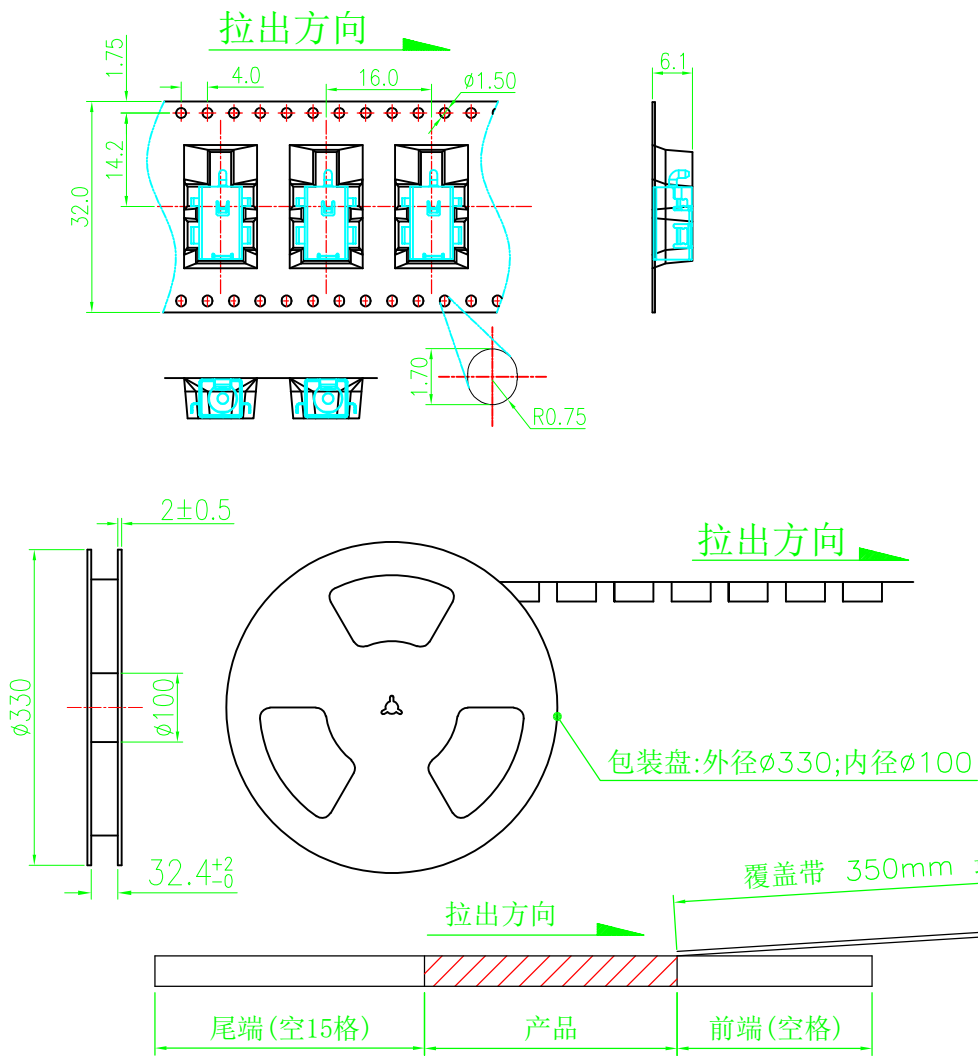

- 备注:
- 材料规格:
 - 载带:T=0.50mm,黑色
 - 包装盘:蓝色
 - 纸箱: L=335,W=335,H=380
 - 包装数量:
600PCS/卷, 10卷(6000PCS)/箱
 - 上盖带拔离力: 0.1N~0.7N(10~70gf);
拔离角度: 165°~180°;
拔离速度: 300mm/分钟.

UNLESS OTHERWISE SPECIFIED TOLERANCES				XBB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME:	
DIM	TOL	DIM	TOL		2019.5.10	$\phi 4.0$ 沉板式(CH=0.90) DC POWER JACK-包装图	
x.	///	x.	///	CHECK:		PART NO.	
x.x	///	x.x	///			XB-DC400170-1093-20000H	
x.xx	///	x.xx	///			SHEET: 1/1	
x.xxx	///	x.xxx	///			REV.: A	
3RD ANGLE PROJECTION		UNIT: mm		APPROVED	Andy-Liu	DRAWING NO	
					2019.5.10		

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------