

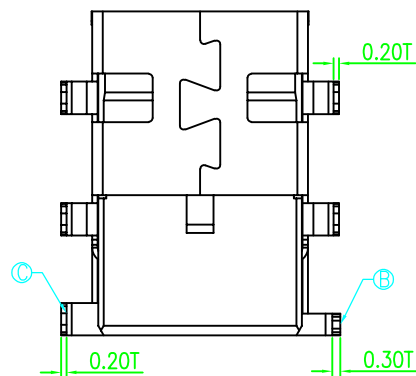



SECTION A-A

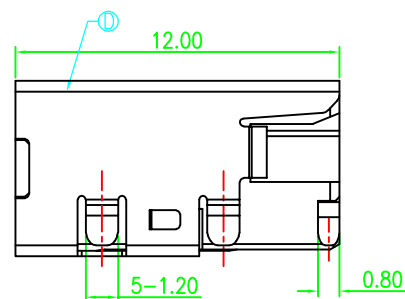


SPECIFICATION:

1. RATING: DC 20V 6.5A
2. CONTACT RESISTANCE: 30mΩ MAX.
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 30N MAX.
6. EXTRACTION FORCE: 6N MIN.
7. DURABILITY: 5,000 CYCLES

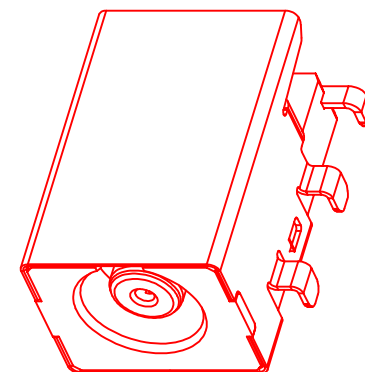

SCHEMATIC	
	2#(+)
	1#(SIGNAL)
	3#(-)

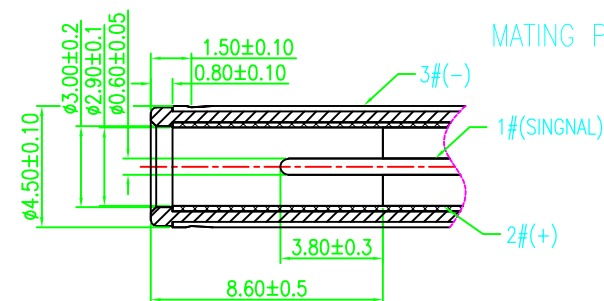

MATING PLUG

UNLESS OTHERWISE
SPECIFIED TOLERANCES


XG 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME:	
DIM	TOL	DIM	TOL	CHECK:	2019.3.24	Φ 4. 50x Φ 0. 60 H6. 50沉板式 DC POWER JACK	
X.	±0.50	X.	±2°		APPROVED	Andy-liu	PART NO.
X.X	±0.30	X.X	±1°			XB-DC450060-0148-30000H	
X.XX	±0.20	X.XX	——	SHEET: 1/1		REV.: A1	
X.XXX	±0.10	X.XXX	——			DRAWING NO	
				UNIT:	2019.3.24		
3RD ANGLE PROJECTION				mm			

RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE:±0.05

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

拉出方向

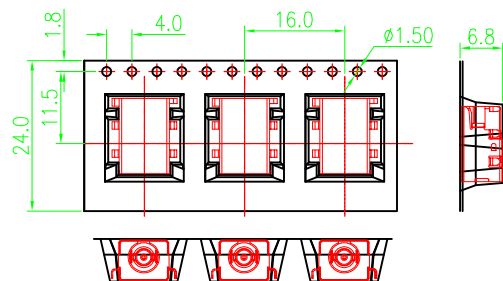


包装盘标签




总共10层


PE袋:




外箱,1PCS

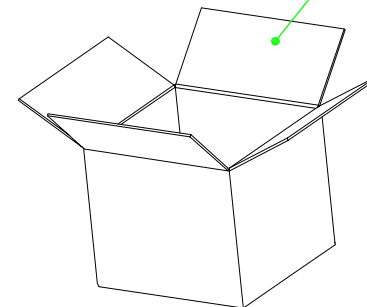

透明胶带

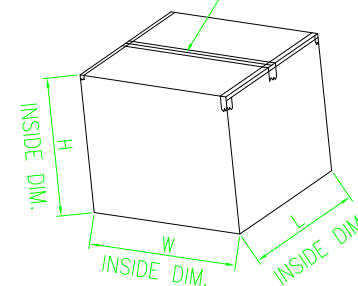


拉出方向

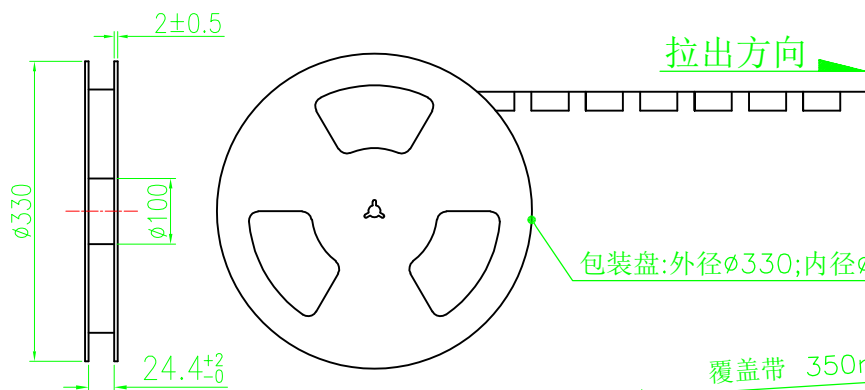

包装盘:外径ø330;内径ø100

覆盖带 350mm 最少.

拉出方向



备注:

- 材料规格:
 - 载带:T=0.50mm,黑色
 - 包装盘:蓝色
 - 纸箱: L=335,W=335,H=300
- 包装数量:
600PCS/卷, 10卷(6000PCS)/箱
- 上盖带拔离力: 0.1N~0.7N(10~70gf);
拔离角度: 165°~180°;
拔离速度: 300mm/分钟.

B	EC20210309001	变更包装数量, 500PCS/卷 → 600PCS/卷	Tony	2020.3.9
REV.	ECN NO.	DESCRIPTION	DESIGN	DATE

UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
x.	///	x.	///
x.x	///	x.x	///
x.xx	///	x.xx	///
x.xxx	///	x.xxx	///

3RD ANGLE PROJECTION

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DESIGN:	Tony	PART NAME:	
CHECK:		Φ4.50xΦ0.60 H6.50沉板式 DC POWER JACK-包装图	
APPROVED	Andy-Liu	PART NO.	
	2021.3.9	XB-DC450060-0148-30000H	
		SHEET: 1/1 REV.: B	
		DRAWING NO	