

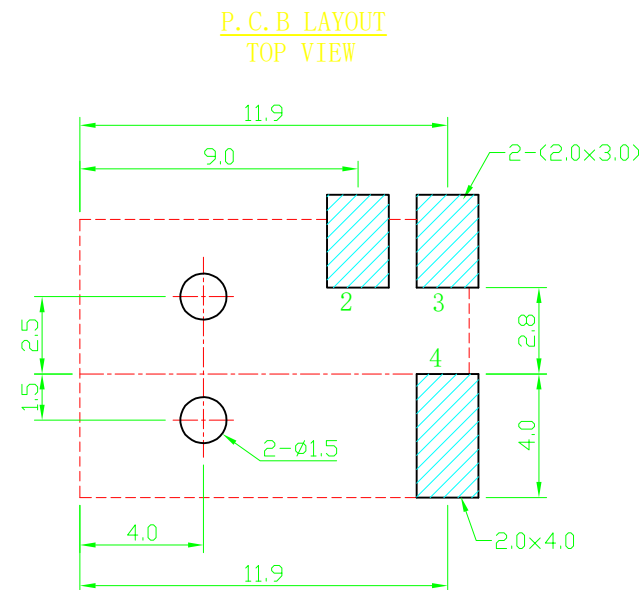
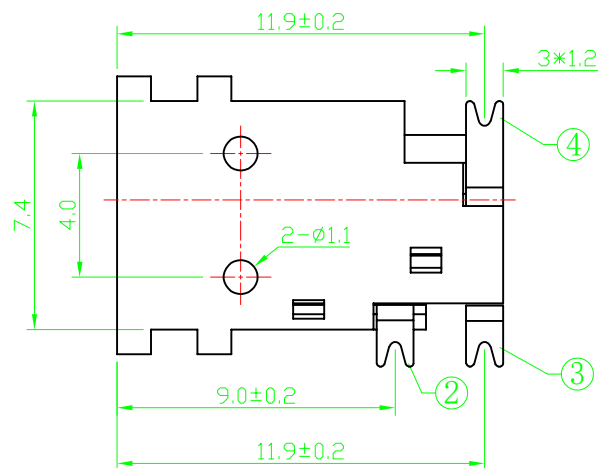
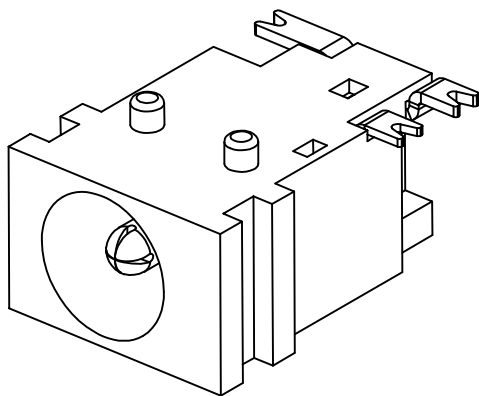
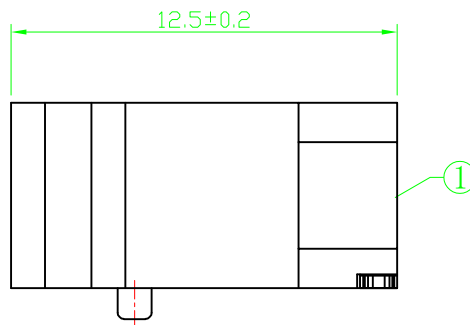


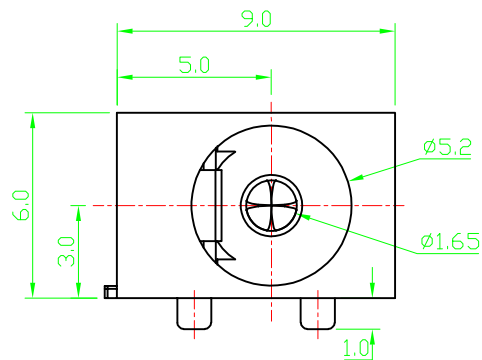


SPECIFICATION

1. Rating : DC 30V 2.0A;
2. Contact resistance: $\leq 0.03 \Omega$;
3. Insulation resistance: $\geq 100M \Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-20N;
6. life test: 5,000 cycles.

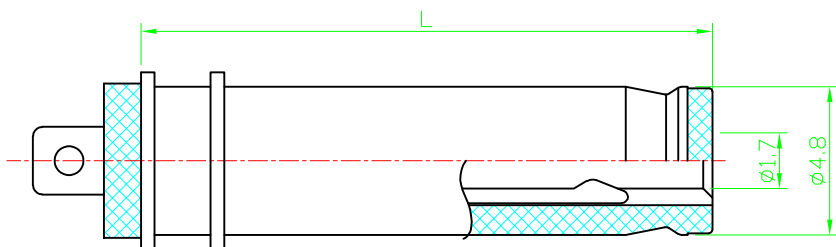

RECOMMENDED PLUG

SCHEMATIC



4	PIN	1	BRASS	Ni-Plating
3	CURVE PIECE	1	BRASS	Ag-Plating
2	SPRING PIECE	1	BRONZE	Ag-Plating
1	HOUSING	1	PA9T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	± 0.50	X.	$\pm 2^\circ$
X.X	± 0.30	X.X	$\pm 1^\circ$
X.XX	± 0.20	X.XX	
X.XXX	± 0.10	X.XXX	



UNIT:
mm



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DESIGN:

Tony

2021.10.28

CHECK:

APPROVED:

Andy

2021.10.28

PART NAME:
DC JACK


PART NO.:

XB-DC475170-1019-20000H







SHEET: 1/1

REV.: A1

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------



单重: 0.68g

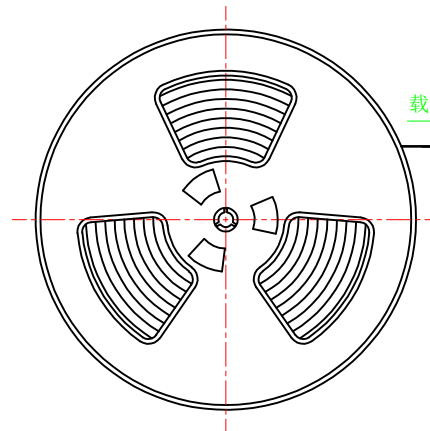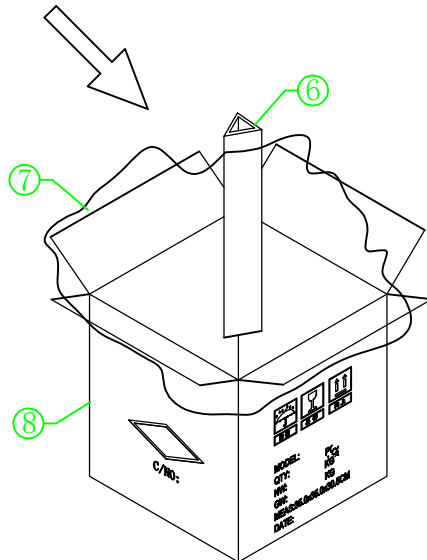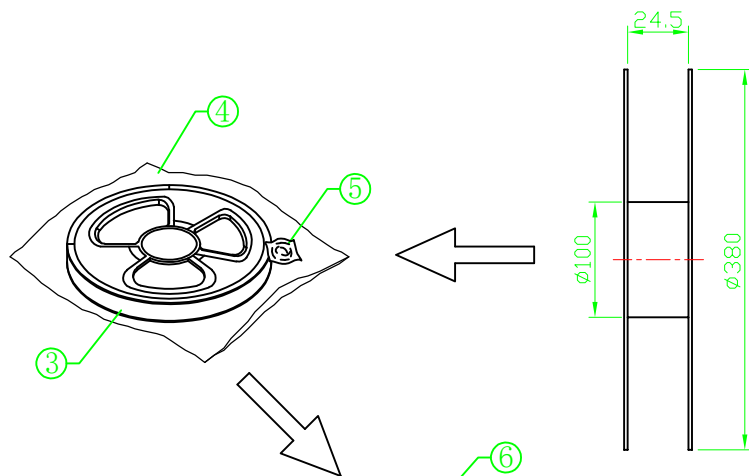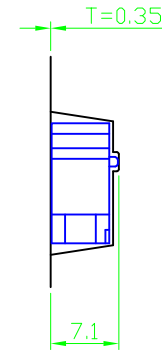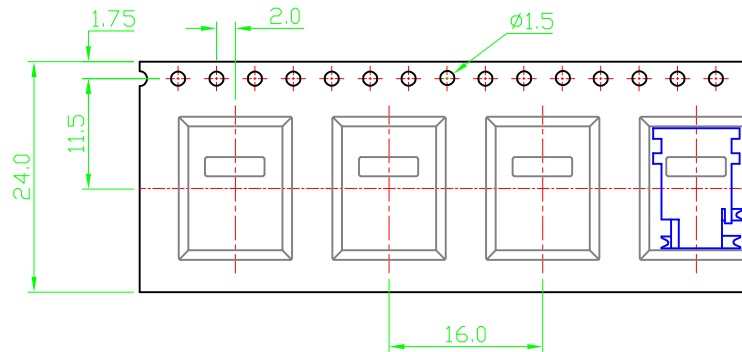

载带拉出方向

装产品900pcs

载带前后留空12格

NOTES:

1. PEELING RESISTANCE: 10gf - 120gf;

2. PEELING SPEED: 300mm/minutes;

3, N.W: 6.1 Kg;

4, G.W: 12.0 Kg;

8	纸箱	1	9.0K PCS/箱	黄色瓦楞纸 (40cm*40cm*35cm)
7	防水袋	1		透明PE
6	护角	4		黄色瓦楞纸
5	干燥剂	1		
4	真空袋	10		透明PE
3	载带盘	10		蓝色PS
2	盖带			透明自粘带
1	载带		900 PCS/盘	PET(黑色)
序号	名称	数量(PCS)	包装产品数量	包材规格

UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS:

DIM	TOL
X	±0.50
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10

ANGLES:

DIM	TOL
X	±2°
X.X	±1°
X.XX	±1°
X.XXX	±1°



UNIT: mm



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DESIGN:

Tony

2021.10.28

CHECK:

Andy

2021.10.28

APPROVED:

Andy

2021.10.28

PART NAME:
DC JACK

PART NO.:
XB-DC475170-1019-20000H

SHEET: 1/1 REV.: A1

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------