

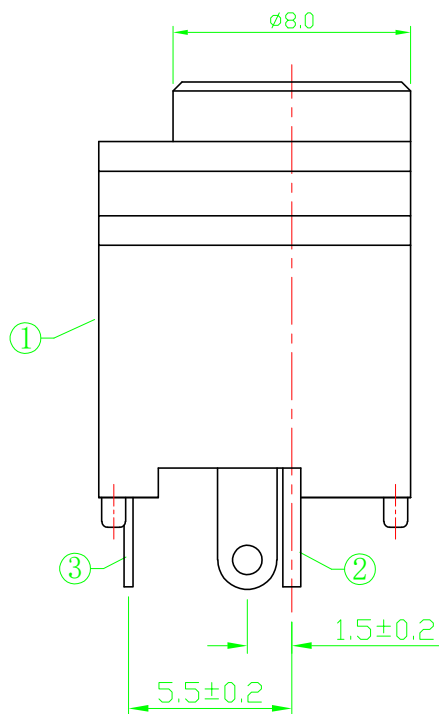
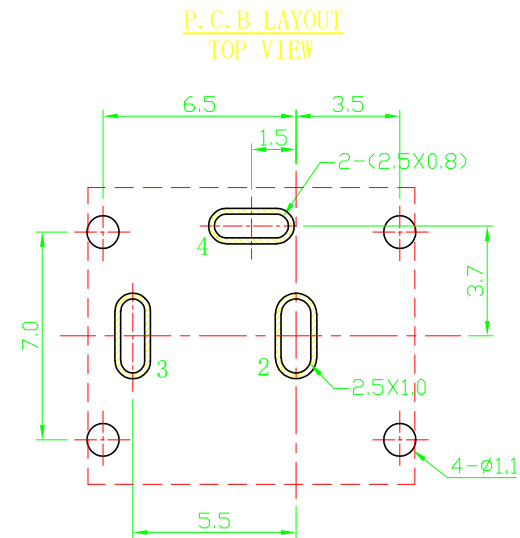
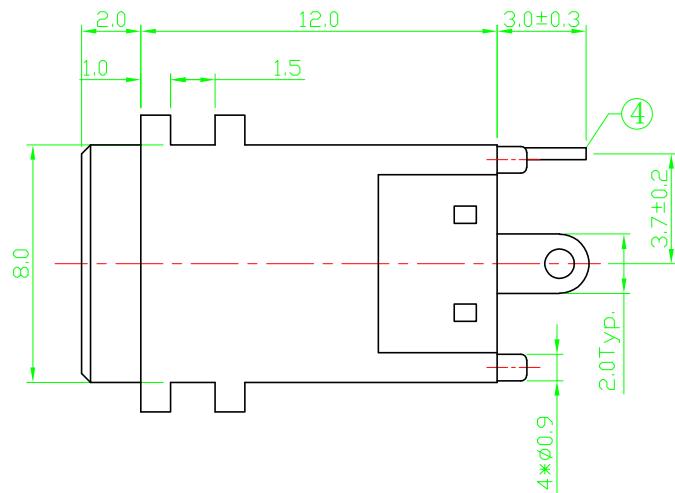
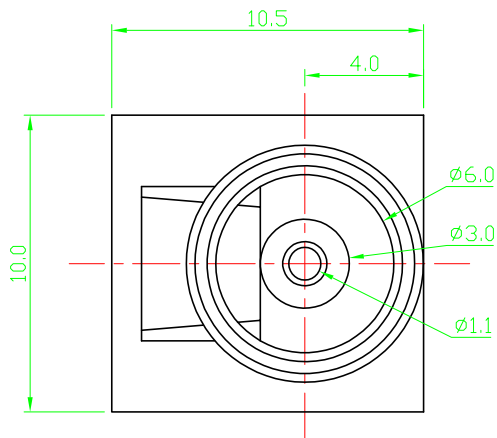


DC MATE PLUG



SCHEMATIC



SPECIFICATION

1. Rating : DC 30V 2.0A;
2. Contact resistance: $\leq 0.03 \Omega$;
3. Insulation resistance: $\geq 100M \Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-20N;
6. life test: 5,000 cycles.

4	CONTACT FOOT	1	BRASS	Ag-Plating
3	SPRING	1	BRONZE	Ag-Plating
2	CURVE PIECE	1	BRONZE	Ag-Plating
1	HOUSING	1	PA9T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	±0.50	X.	±2°
X.X	±0.30	X.X	±1°
X.XX	±0.20	X.XX	—
X.XXX	±0.10	X.XXX	—



UNIT:
mm



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DESIGN:

Tony

2021.11.12

CHECK:

APPROVED

Andy

2021.11.12

PART NAME:

5510 DC POWER JACK

PART NO.




XB-DC550100-0959-20000H

SHEET: 1/1



REV.: A1

DRAWING NO


REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

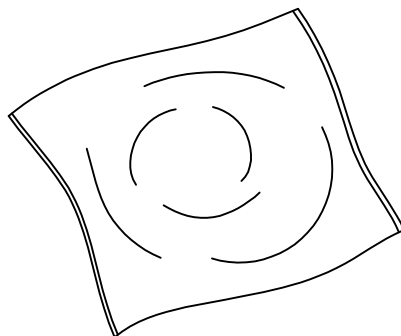



PE袋:1000pcs/袋

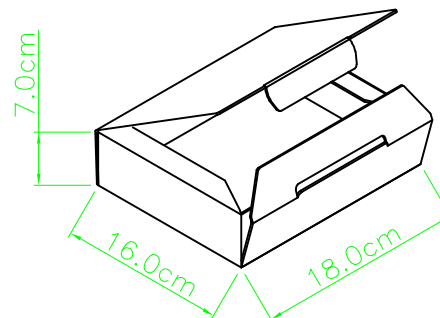

小盒包装: 1袋/盒

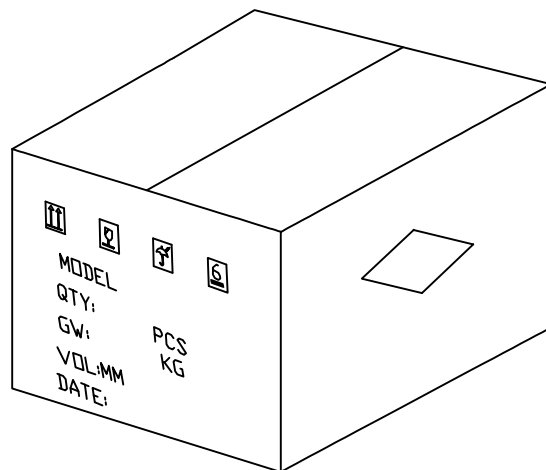

10000pcs/箱

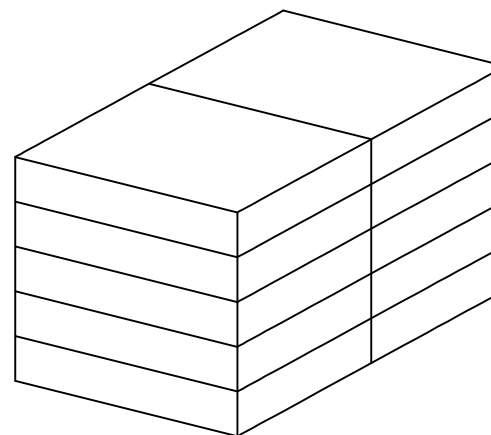

UNLESS OTHERWISE SPECIFIED TOLERANCES				XB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME:	
DIM	TOL	DIM	TOL		2021.11.12	5510 DC POWER JACK	
X.	±0.50	X.	±2°	CHECK:		包装图	
X.X	±0.30	X.X	±1°			PART NO.	
X.XX	±0.20	X.XX				XB-DC550100-0959-20000H	
X.XXX	±0.10	X.XXX				SHEET: 1/1 REV.: A1	
3RD ANGLE PROJECTION				UNIT: mm	APPROVED	Andy	DRAWING NO
					2021.11.12		

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------