


Specification:

- Rating : DC 12V 5A.
- Contact resistance: $\leq 30\text{m}\Omega$.
After life test: $\leq 50\text{m}\Omega$.
- Insulation resistance: $\geq 100\text{M}\Omega$ (500VDC).
After life test: $\geq 50\text{M}\Omega$.
- Withstand voltage: 500VAC.
- Insertion and extraction force: 3N~30N.
- life test: 5000cycles min.
- Operation temperature range: -20°C~70°C.
- Preservative temperature range: -40°C~85°C.




□ : TERMINAL NO.

NO.	DESCRIPTION	QTY	MATERIAL	REMARK
⑥	Shunt terminal	1	Brass(C2680) t0.3	Sn/Ag plating
⑤	Tip spring	1	C5210 t0.3	Sn/Ag plating
④	Center pin terminal	1	Brass(C2680) t0.40	Sn/Ag plating
③	Center pin	1	Brass(H65)	CuSn/Co plating
②	Cover	1	PBT UL94V-0	Black
①	Housing	1	PBT UL94V-0	Black

UNLESS OTHERWISE SPECIFIED TOLERANCES		DESIGN:	Tony 2018.11.15	PART NAME: Φ 5.50立式 DC POWER JACK
DECIMALS:	ANGLES:			
DIM	TOL	DIM	TOL	CHECK:
X.	±0.50	X.	±2°	Andy 2018.11.15
X.X	±0.30	X.X	±1°	
X.XX	±0.20	X.XX	/	
X.XXX	±0.10	X.XXX	/	
3RD ANGLE PROJECTION		UNIT: mm	APPROVED	DRAWING NO

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.



吸塑盒

内箱

200



280

15

220

300

17

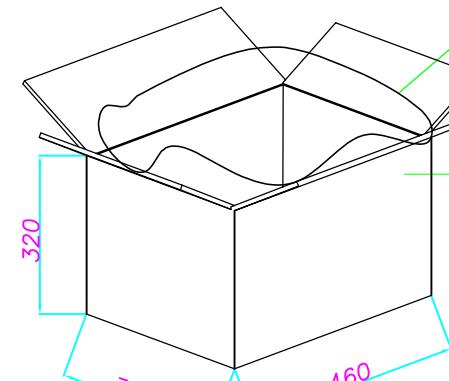1 吸塑盒
= 100pcs1 内箱
= 10 盒
= 10*100 PCS
= 1000 PCS防水袋(1 PC)
(100*100*0.05)1 外箱
= 4 内箱
= 4*1000 PCS
= 4000 PCS

备注:

- 1 吸塑盒=100PCS
- 1 内箱=100PCS*10盒=1000PCS
- 1 外箱=1000PCS*4内箱=4000PCS

REV: 7 ECN NO: 6 DESCRIPTION DESIGN DATE 4 3 2 1

UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS: ANGLES:

DIM TOL DIM TOL

X. ±0.50 X. ±2°

X.X. ±0.30 X.X. ±1°

XXX. ±0.20 XXX. /

XXX. ±0.10 XXX. /

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.PART NAME:
Φ5.50立式
DC POWER JACK-包装图PART NO.:
XB-DC550200-0222-20000H

SHEET: 1/1 REV.: A1

DRAWING NO:

2018.11.15

Andy

2018.11.15

Tony

2018.11.15

Design: Tony

Check:

Approved: Andy