

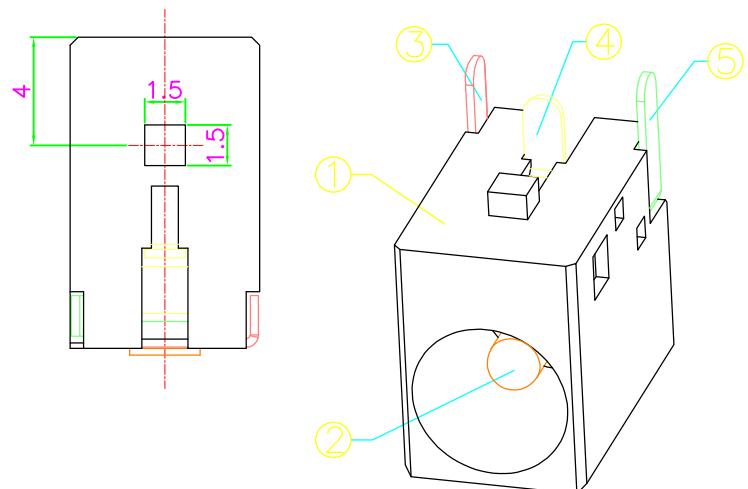


SPECIFICATION

1. Rating : DC 20V 3A;
2. Contact resistance: $\leq 30m\Omega$;
3. Insulation resistance: $\geq 100M\Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-30N;
6. life test: 5,000 cycles.

P. C. B Layout
(Copper-sided view)

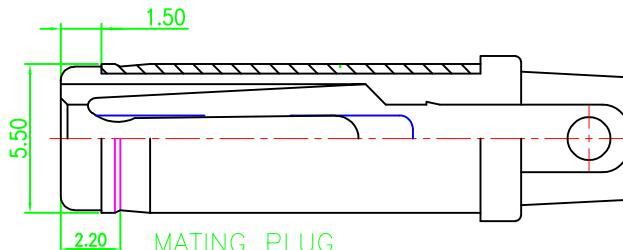

□ : TERMINAL NO.

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
UNLESS OTHERWISE SPECIFIED TOLERANCES				
	DECIMALS:	ANGLES:	DESIGN:	Tony
	DIM TOL	DIM TOL		2018.12.3
X.	± 0.50	X.	$\pm 2^\circ$	
X.X	± 0.30	X.X	$\pm 1^\circ$	
X.XX	± 0.20	X.XX	$\pm 1^\circ$	
X.XXX	± 0.10	X.XXX	$\pm 1^\circ$	
3RD ANGLE PROJECTION		UNIT: mm	APPROVED:	Andy
3RD ANGLE PROJECTION		UNIT: mm	APPROVED:	Andy
3RD ANGLE PROJECTION		UNIT: mm	APPROVED:	Andy
3RD ANGLE PROJECTION		UNIT: mm	APPROVED:	Andy

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

REV. ECN NO. DESCRIPTION DESIGN DATE



3RD ANGLE PROJECTION




PART NAME:
Φ 5.50 H9.0卧式
DC POWER JACK

PART NO.:
XB-DC550200-0513-20000H

SHEET: 1/1 REV.: A1


DRAWING NO:

2018.12.3

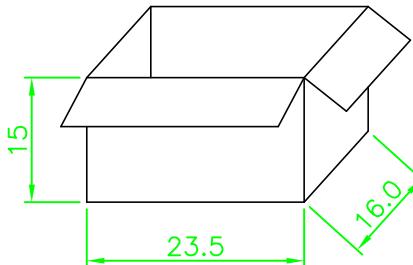


PE袋 (500pcs)

内箱
(5x500=2500pcs)

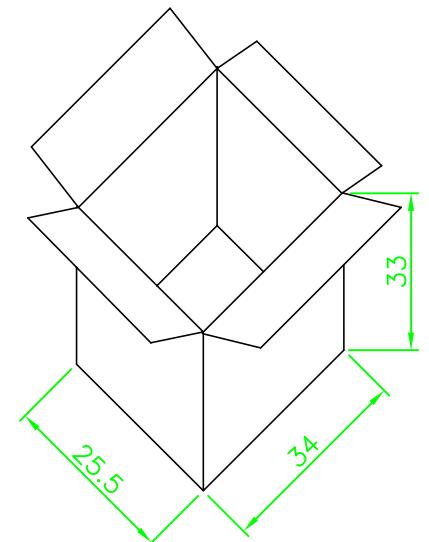

外箱
(4x2500=10,000pcs)

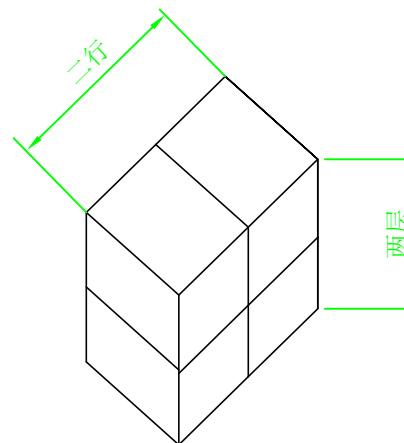

UNLESS OTHERWISE
SPECIFIED TOLERANCES



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONI CS CO., LTD.

PART NAME:

Φ 5.50 H9.0卧式
DC POWER JACK-包装图

PART NO.:

XB-DC550200-0513-2000H

SHEET: 1/1 REV.: A1

DRAWING NO:



3RD ANGLE PROJECTION

DECIMALS:

DIM

TOL

X.

±0.50

X.X

±0.30

X.XX

±0.20

X.XXX

±0.10

ANGLES:

DIM

TOL

X.

±2°

X.X

±1°

X.XX

±1°

X.XXX

±1°

DESIGN:

TONY

2018.12.3

CHECK:

APPROVED:

ANDY

2018.12.3

UNIT:

MM

8 7 6 5 4 3 2 1

REV.

ECN NO.

DESCRIPTION

DESIGN

DATE

