



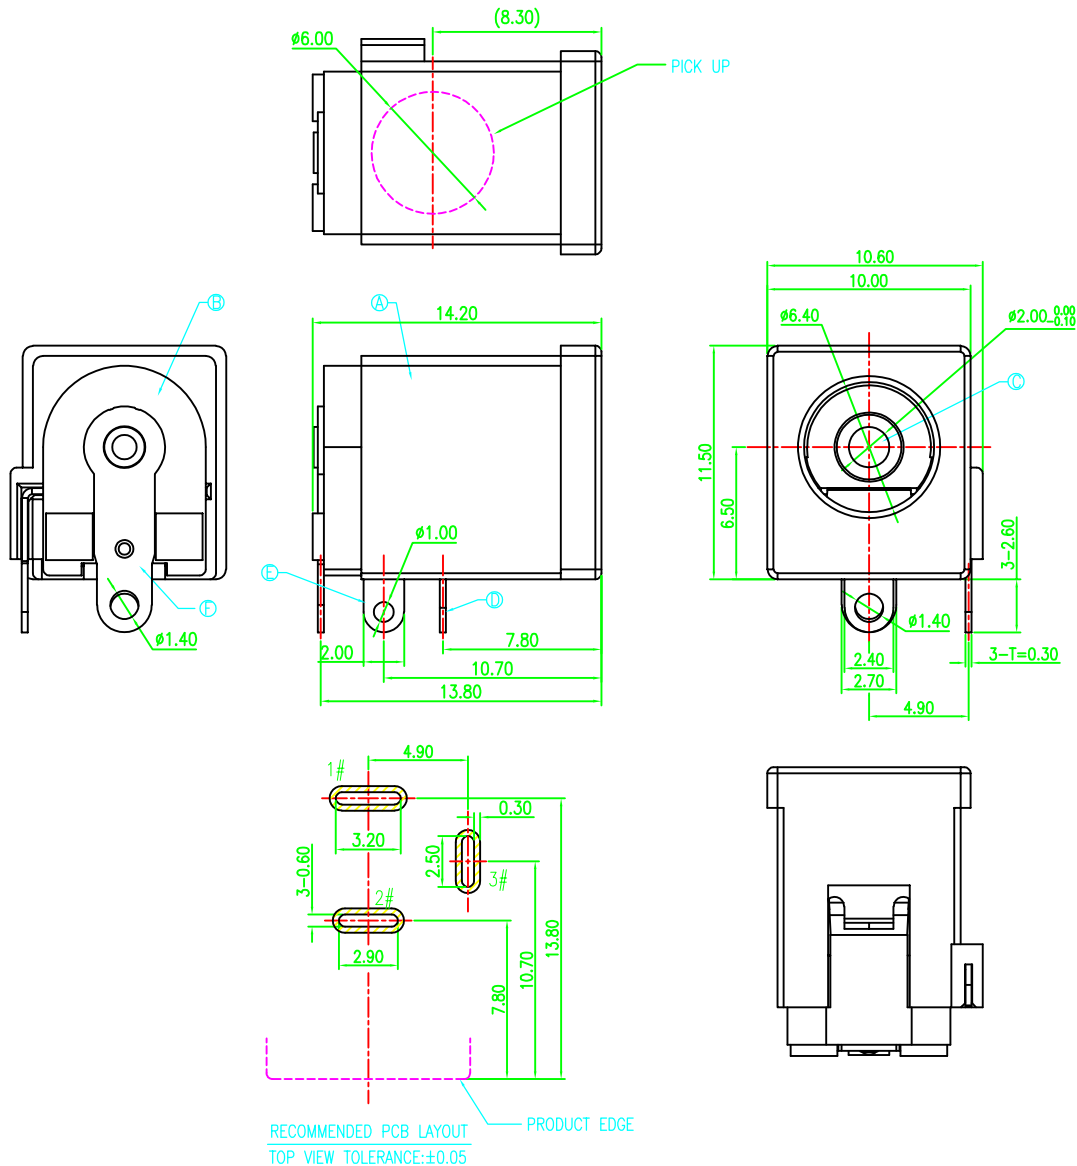


SPECIFICATION:

1. RATING: DC 60V 5A
2. CONTACT RESISTANCE: 30mΩ MAX.
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 30N MAX.
6. EXTRACTION FORCE: 6N MIN.
7. DURABILITY: 5,000 CYCLES



SCHEMATIC	
	1#(+)
	3#
	2#(-)

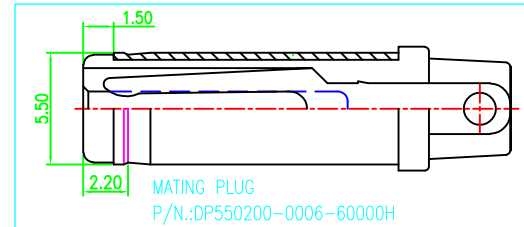

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
F	PLATE	BRASS	Sn 60u" MIN./Ni 50u" MIN.	1
E	SHUNT	BRASS	Sn 60u" MIN./Ni 50u" MIN.	1
D	SPRING	COPPER ALLOY	Au 1u" ON THE CONTACT AREA Sn 60u" MIN. ON THE SOLDER TAIL Ni 50u" MIN. UNDER PLATED OVERALL	1
C	CENTER PIN	BRASS	Au 1u"/Ni 50u" MIN.	1
B	COVER	LCP	BLACK	1
A	HOUSING	LCP	BLACK	1



UNLESS OTHERWISE
SPECIFIED TOLERANCES

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME: Φ5.5 H11.5 卧式 DC POWER JACK
DIM	TOL	DIM	TOL		2022.4.21	
x.	±0.50	x.	±2°	CHECK:		PART NO. XB-DC550200-1095-20000H SHEET: 1/1 REV.: A1 DRAWING NO
x.x	±0.30	x.x	±1°			
x.xx	±0.20	x.xx	—			
x.xxx	±0.10	x.xxx	—	APPROVED	Andy-liu	
3RD ANGLE PROJECTION		UNIT: mm			2022.4.21	


REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

拉出方向

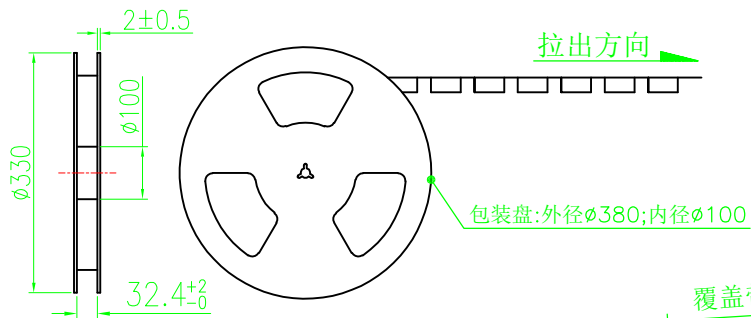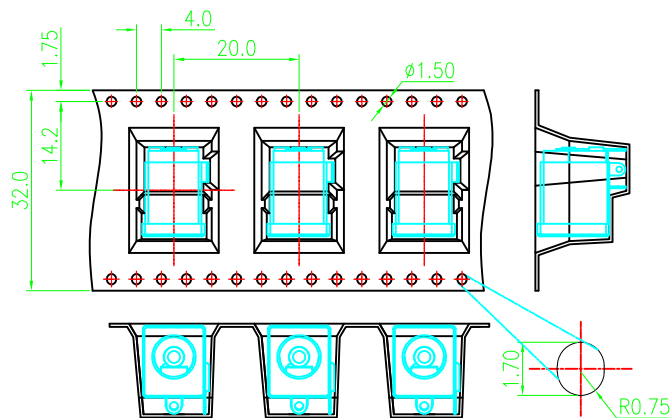


包装盘:外径 $\phi 380$;内径 $\phi 100$

覆盖带 300mm 最少.



备注:

- 材料规格:
 - 载带:透明
 - 包装盘:蓝色
 - 纸箱: L=335,W=335,H=380
- 包装数量:
200PCS/卷, 10卷(2000PCS)/箱
- 上盖带拔离力: 0.1N~0.7N(10~70gf);
拔离角度: $165^{\circ} \sim 180^{\circ}$;
拔离速度: 300mm/分钟.

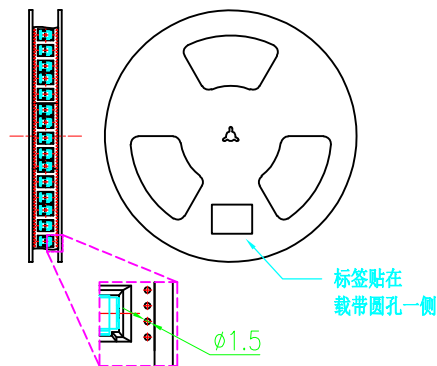


包装盘标签

总共10层

PE袋:

外箱,1PCS

透明胶带

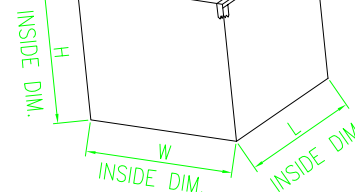

UNLESS OTHERWISE SPECIFIED TOLERANCES

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	///	X.	///
X.X	///	X.X	///
X.XX	///	X.XX	///
X.XXX	///	X.XXX	///

3RD ANGLE PROJECTION

UNIT: mm

DESIGN:	Tony
CHECK:	
APPROVED	Andy-Liu
	2022.4.21

PART NAME:	
$\phi 5.5$ H11.5 卧式 DC POWER JACK-包装图	
PART NO.	
XB-DC550200-1095-20000H	
SHEET: 1/1	REV.: A1
DRAWING NO	

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------