

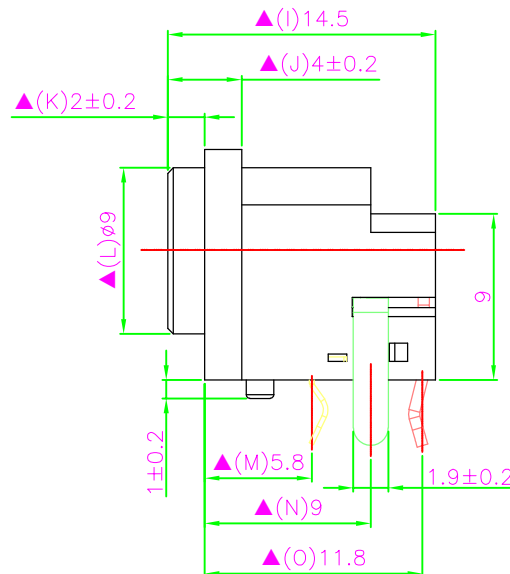
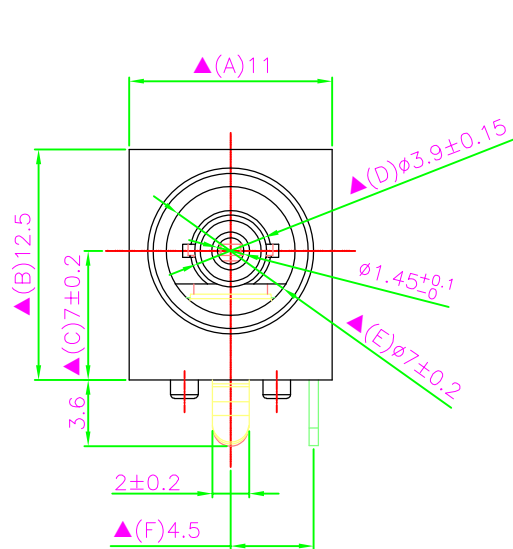
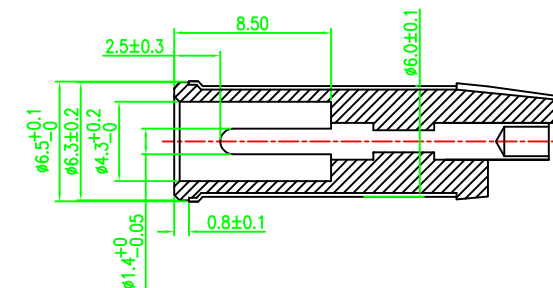
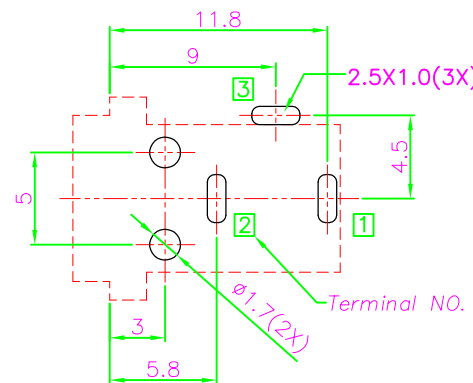


□ : TERMINAL NO.

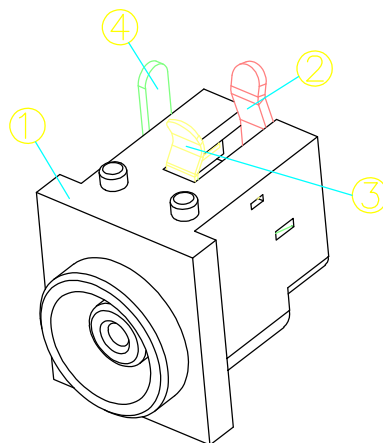

MATING PLUG

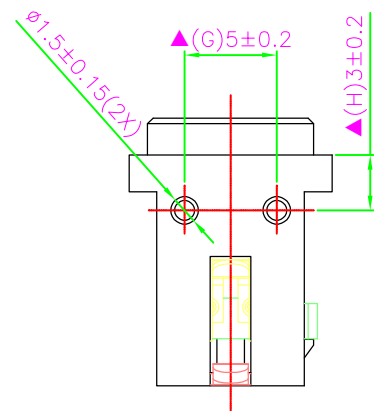

RECOMMENDED P.C.B. LAYOUT
UNSPECIFIED TOLERANCE: ±0.05
(BOTTOM VIEW)

Specification:

1. Rating : DC 30V 5A;
2. Contact resistance: ≤30mΩ;
After test: ≤50mΩ
3. Insulation resistance: ≥100MΩ (500VDC);
After test: ≥50MΩ
4. Withstanding voltage: 500VAC ;
5. Insertion and extraction force: 3N~30N;
6. life test: 5000cycles min;
7. Operation temperature range: -20℃~70℃
8. Preservative temperature range: -40℃~85℃
9. Sign "▲" is importance dimension.

④	Shunt terminal	③	1	C2680 t0.5	Tin plating
③	Tip spring	②	1	C5210 t0.25	Tin plating
②	Center pin	①	1	C5191 t0.6	Tin plating
①	Housing		1	PBT	Black
NO.	DESCRIPTION	QTY	MATERIAL	REMARK	

UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	±0.50	X.	±2°
X.X	±0.30	X.X	±1°
X.XX	±0.20	X.XX	—
X.XXX	±0.10	X.XXX	—



UNIT:
mm



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DESIGN:

Tony

2019.4.9

CHECK:

APPROVED

Andy

2019.4.9

PART NAME:

φ6.50X1.40 卧式
DC POWER JACK

PART NO.


XB-DC650140-0169-20000H

SHEET: 1/1

REV.: A1


DRAWING NO

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

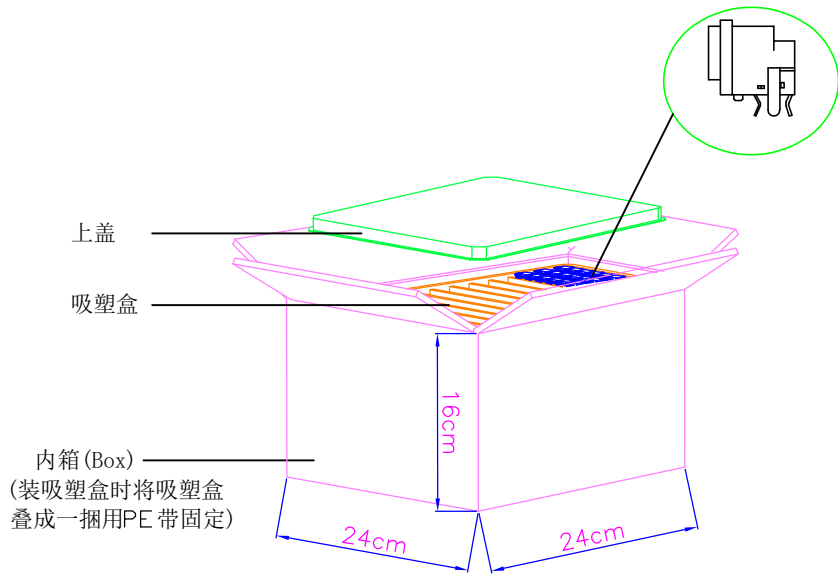

1小箱=100pcs/盒*10盒
=1000PCS

外箱 (Carton)
(内套大PE袋)

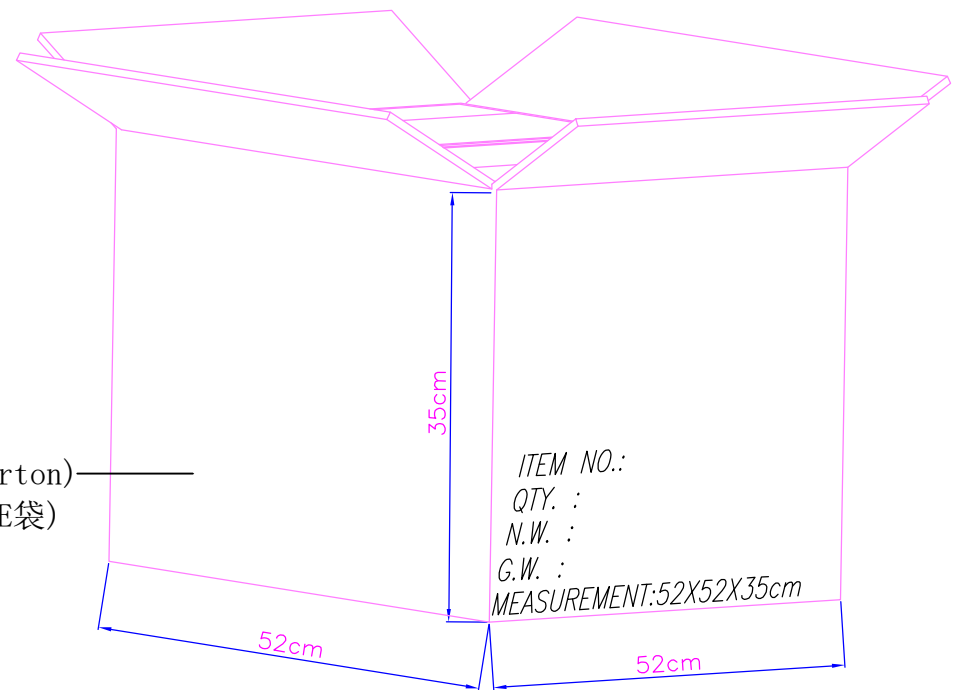

1大箱=1000pcs/小箱*8/小箱
=8000PCS

UNLESS OTHERWISE SPECIFIED TOLERANCES				XB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME:	
DIM	TOL	DIM	TOL		2019.4.9	Φ6.50X1.40 卧式	
X.	±0.50	X.	±2°	CHECK:		DC POWER JACK- 包装图	
X.X	±0.30	X.X	±1°			PART NO.	
X.XX	±0.20	X.XX				XB-DC650140-0169-20000H	
X.XXX	±0.10	X.XXX				SHEET: 1/1 REV.: A1	
3RD ANGLE PROJECTION				UNIT:	mm	APPROVED	Andy
					2019.4.9	DRAWING NO	

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------