

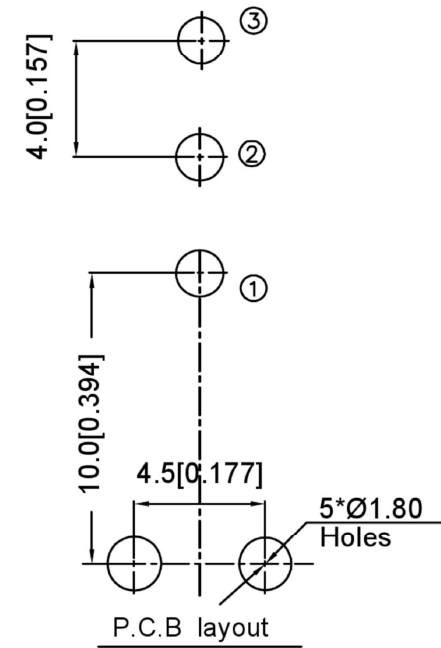
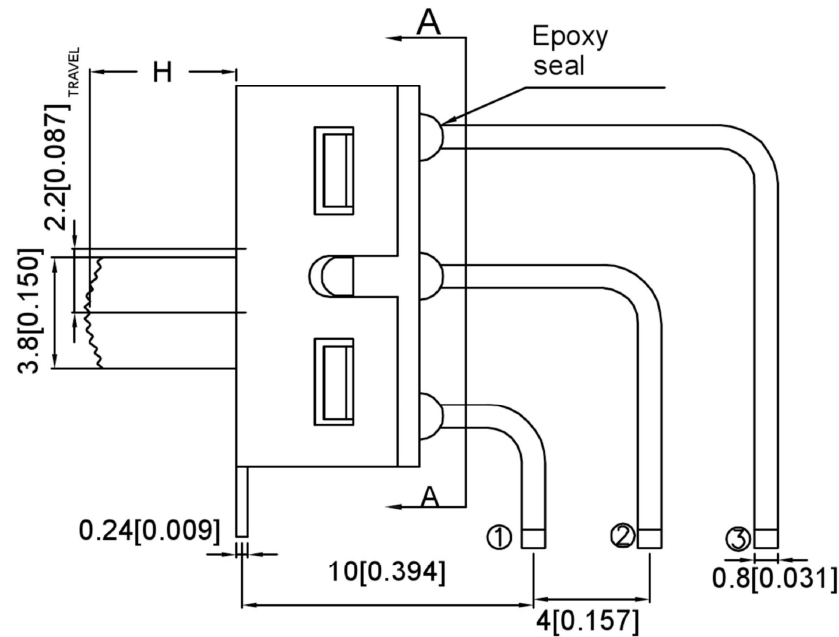
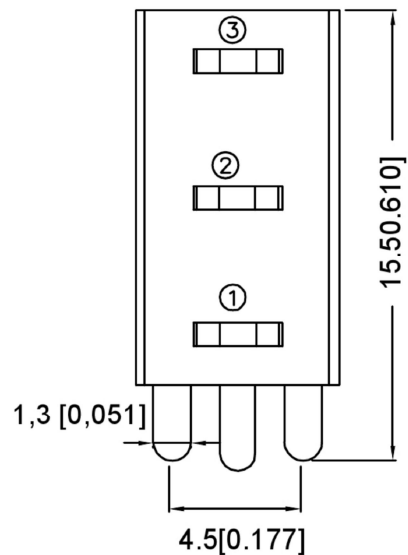


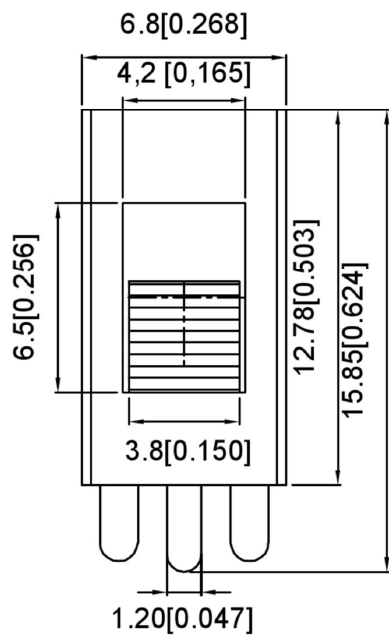

MODEL CODE

SS-12D28	X	X
Knob Type	H(mm)	
L	2~12	
G		

G TYPE	L TYPE



Typical Specifications

- 1.Rating:AC 125V 3A
- 2.Insulation Resistance:1,000M min
- 3.Dielectric strength:1,500V RMS
- 4.Operating Life: 10,000 cycles

⑤	Terminal	—	3	Copper Alloy	silver plated	—
④	Contact	—	1	Copper Alloy	silver plated	—
③	Housing	—	1	Stainless Steel		—
②	Slide Handle	—	1	Nylon		—
①	Case	—	1	Diallyl Phthalate (DAP)		—
ITEM	PAPT NAME	TER,NO	QTY	MATERIAL	FINISHING	REMARK

				ANGLAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
	DATE	REVISED	APPROVED	L > 63	±0.5
					UNSPECIFIED TOLERANCES
www.alpsr.com www.adxidz.com www.xbswitch.com					



DSND		SCALE: N/A	MODEL TYPE: SLIDE SWITCH
DWN		VIEW:	PART NO.: SS-12D28XX
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	
		WEIGHT	SHEET
		1/1	REVISIO
			A0

DONG GUAN XI BANG ELECTRONIC CO., LTD