

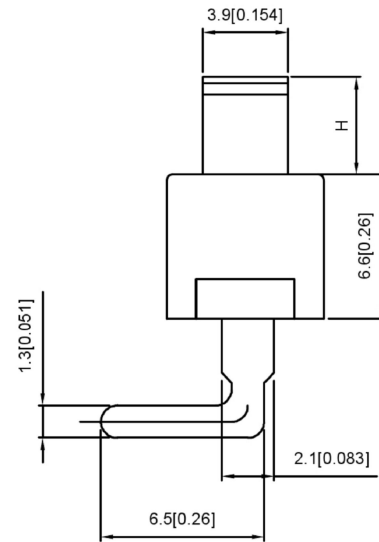


Specification:

1. Rating: 6A 120VAC
2. Contact resistance: $\leq 30 \text{ m}\Omega$
3. Insulation resistance: $\geq 100 \text{ M}\Omega$ (DC500V/Min)
4. Electronics life: > 10000 cycles
5. Operation force: $250 \pm 100 \text{ gf}$

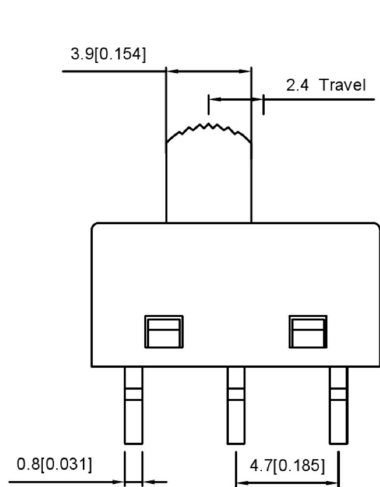

SS-12M12 X X

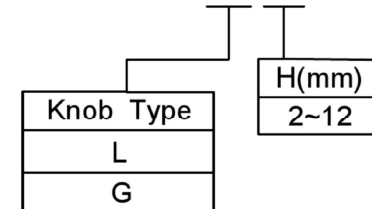

Function		
ON	NA	ON
	/	

				ANGULAR	$\pm 5^\circ$
				$L \leq 4$	± 0.2
				$4 < L \leq 16$	± 0.3
				$16 < L \leq 63$	± 0.4
				$L > 63$	± 0.5
	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	



DSND		SCALE: N/A	MODEL TYPE: SLIDE SWITCH		
DWN		VIEW:	PART NO.: SS-12M12XX		
CHKD		UNIT: mm/in	DWG NO.:		
APPD		SIZE: A4	WEIGHT	SHEET	REVISIC
				1/1	A0