


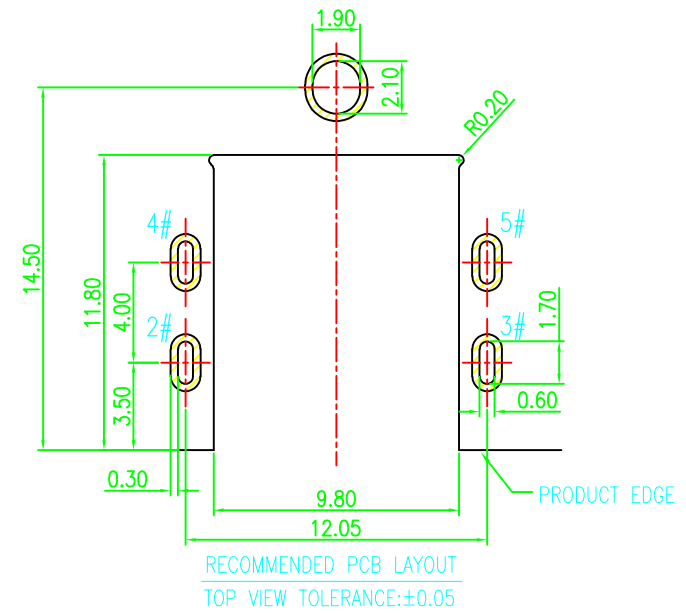
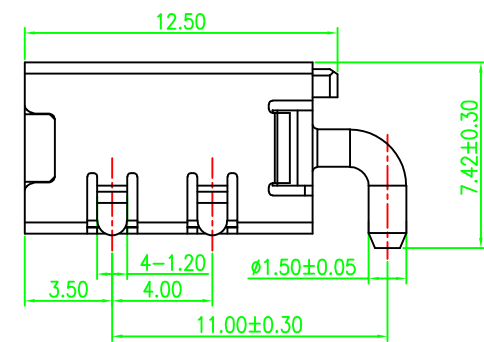
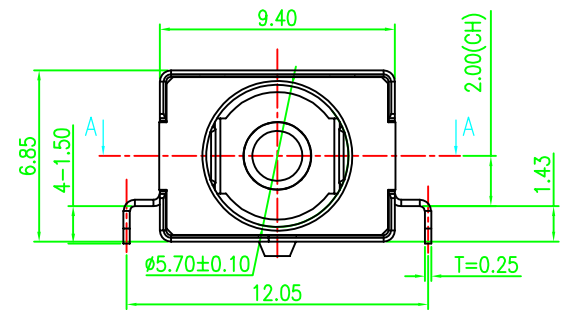

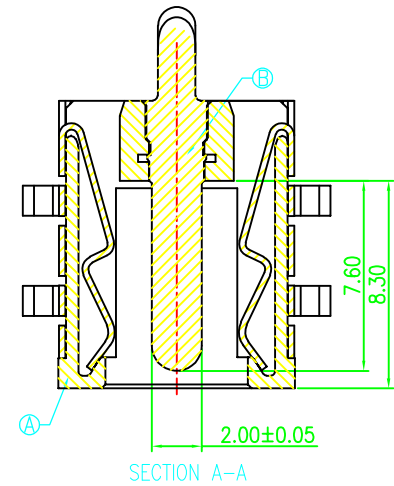


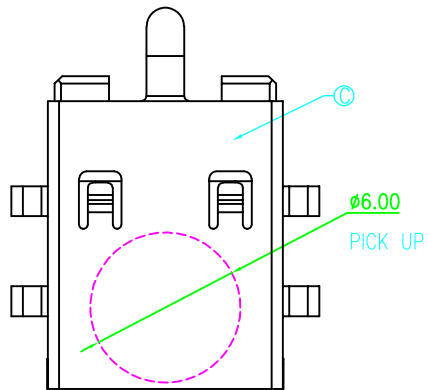

- SPECIFICATION:
1. RATING: DC 30V 15A
 2. CONTACT RESISTANCE:
30mΩ MAX(INITIAL).
50mΩ MAX(FINAL).
 3. INSULATION RESISTANCE: 100 MΩ MIN.
 4. WITHSTAND VOLTAGE: 500 VAC
 5. INSERTION FORCE: 30N MAX.
 6. EXTRACTION FORCE: 3N MIN.
 7. DURABILITY: 5,000 CYCLES



C	SHELL	C5210	Ni 40u" MIN.	1
B	CENTER PIN	BRASS	GOLD FLASH /Ni 40u" MIN.	1
A	HOUSING	PA10T	BLACK	1
no.	DESCRIPTION	MATERIAL	REMARKS	QTY

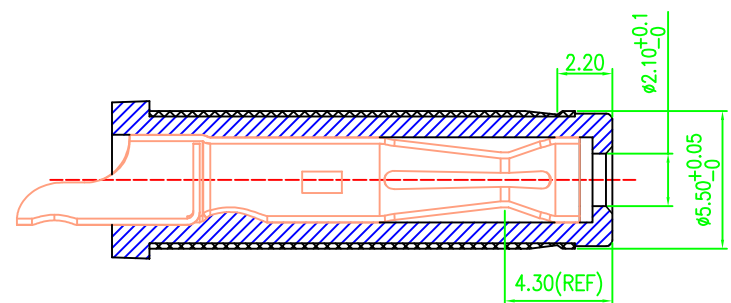

MATING PLUG
DP550200-0129-60000H

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	±0.50	X.	±2°
X.X	±0.30	X.X	±1°
X.XX	±0.20	X.XX	—
X.XXX	±0.10	X.XXX	—

3RD ANGLE PROJECTION

DESIGN: Tony

CHECK:

APPROVED: Andy

2022.6.10

PART NAME:
Φ5.5 卧式 DC POWER JACK

PART NO.
XB-DC550200-1156-20000H



SHEET: 1/1 REV.: A1

DRAWING NO

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

拉出方向

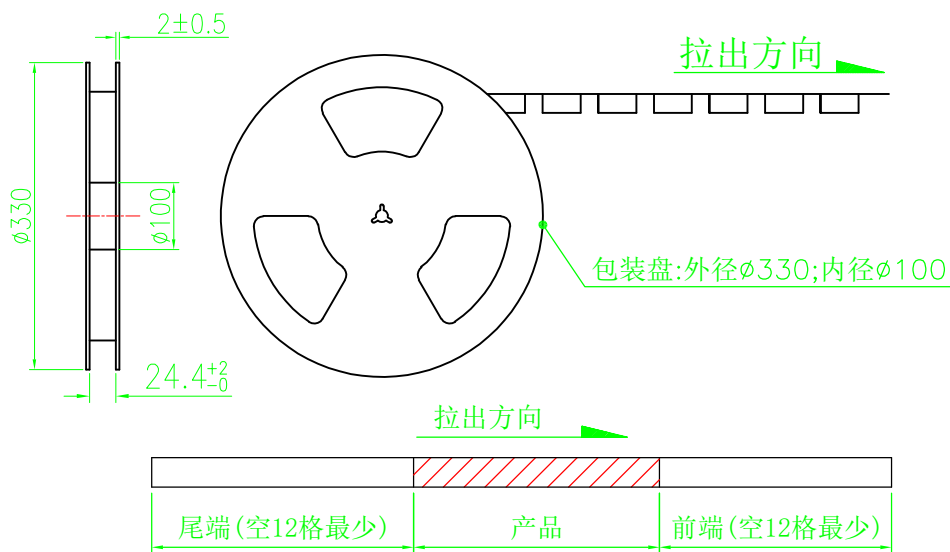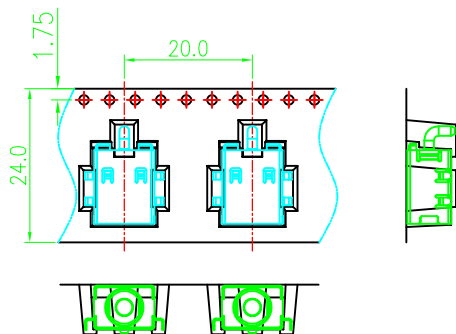

备注:

- 材料规格:
 - 载带:T=0.50mm
 - 包装盘:蓝色
 - 纸箱: L=335,W=335,H=300
- 包装数量:
400PCS/卷, 10卷(4000PCS)/箱
- 上盖带拔离力: 0.1N~0.7N(10~70gf);
拔离角度: 165°~180°;
拔离速度: 300mm/分钟.

包装盘标签

总共10层

PE袋:

外箱,1PCS

透明胶带

UNLESS OTHERWISE
SPECIFIED TOLERANCES

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	///	X.	///
X.X	///	X.X	///
X.XX	///	X.XX	///
X.XXX	///	X.XXX	///
3RD ANGLE PROJECTION		UNIT: mm	

DESIGN:	Tony	PART NAME: DC POWER JACK -包装图
CHECK:		
APPROVED	Andy-Liu	PART NO. XB-DC550200-1156-20000H
	2022.5.20	SHEET: 1/1 REV.: A
		DRAWING NO

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------