

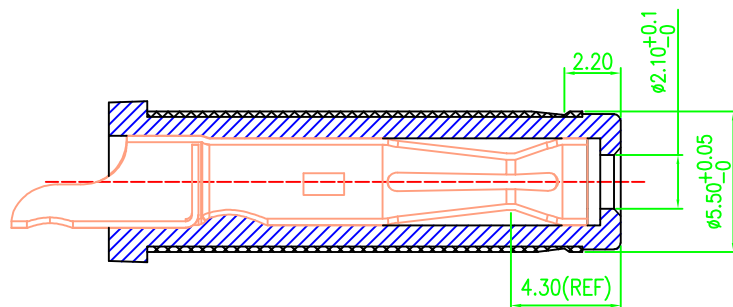
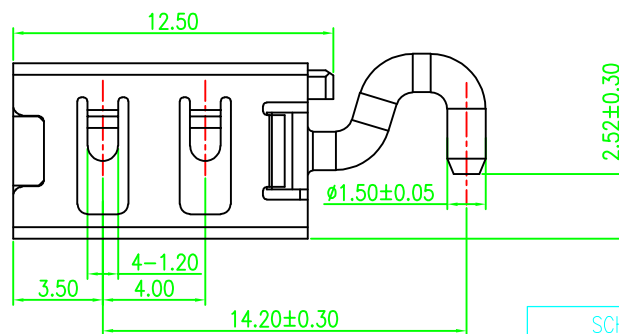
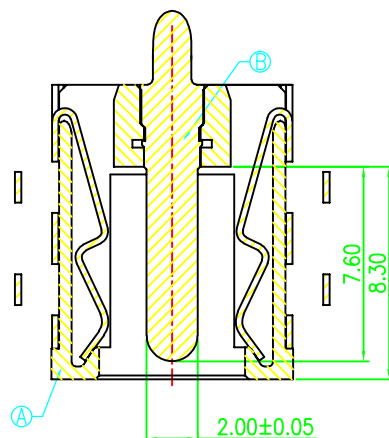
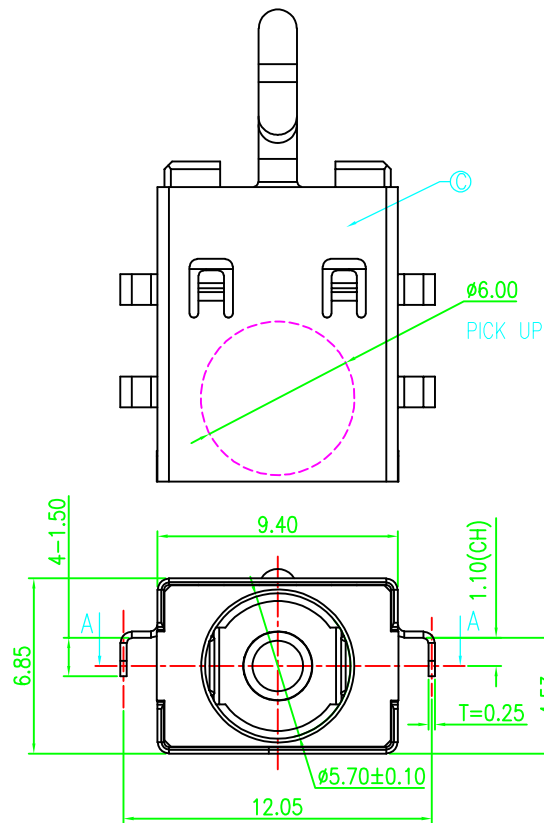


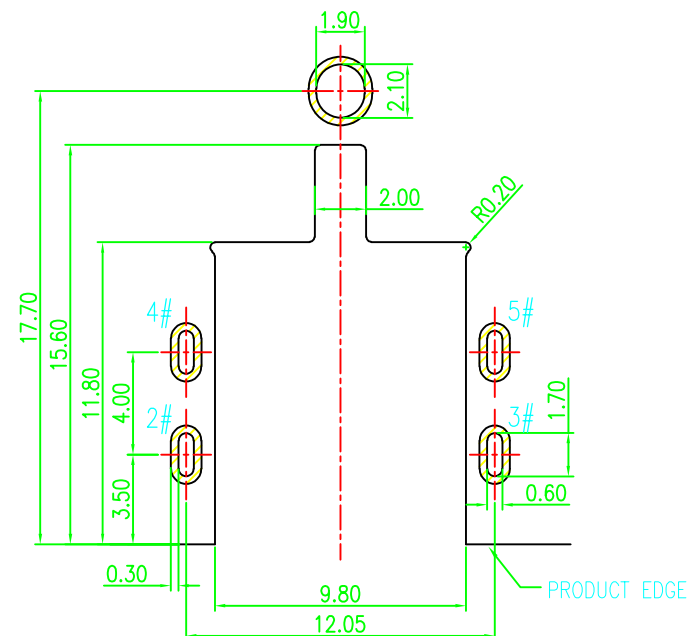

MATING PLUG
DP550200-0129-60000H

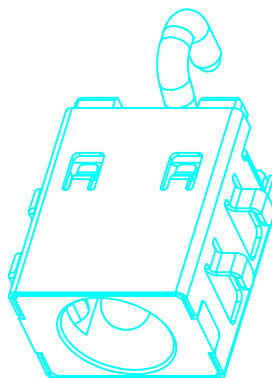

RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE: ±0.05

SPECIFICATION:

1. RATING: DC 30V 15A
2. CONTACT RESISTANCE:
30mΩ MAX(INITIAL).
50mΩ MAX(FINAL).
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 30N MAX.
6. EXTRACTION FORCE: 3N MIN.
7. DURABILITY: 5,000 CYCLES


C	SHELL	C5210	Ni 40u" MIN.	1
B	CENTER PIN	BRASS	GOLD FLASH /Ni 40u" MIN.	1
A	HOUSING	PA10T	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

UNLESS OTHERWISE
SPECIFIED TOLERANCES

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME: Φ5.5 卧式 DC POWER JACK
DIM	TOL	DIM	TOL		2022.6.10	
X.	±0.50	X.	±2°	CHECK:		PART NO. XB-DC550200-1160-20000H
X.X	±0.30	X.X	±1°			
X.XX	±0.20	X.XX	—			
X.XXX	±0.10	X.XXX	—	APPROVED	Andy	SHEET: 1/1 REV.: A1
3RD ANGLE PROJECTION		UNIT: mm			2022.6.10	DRAWING NO

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

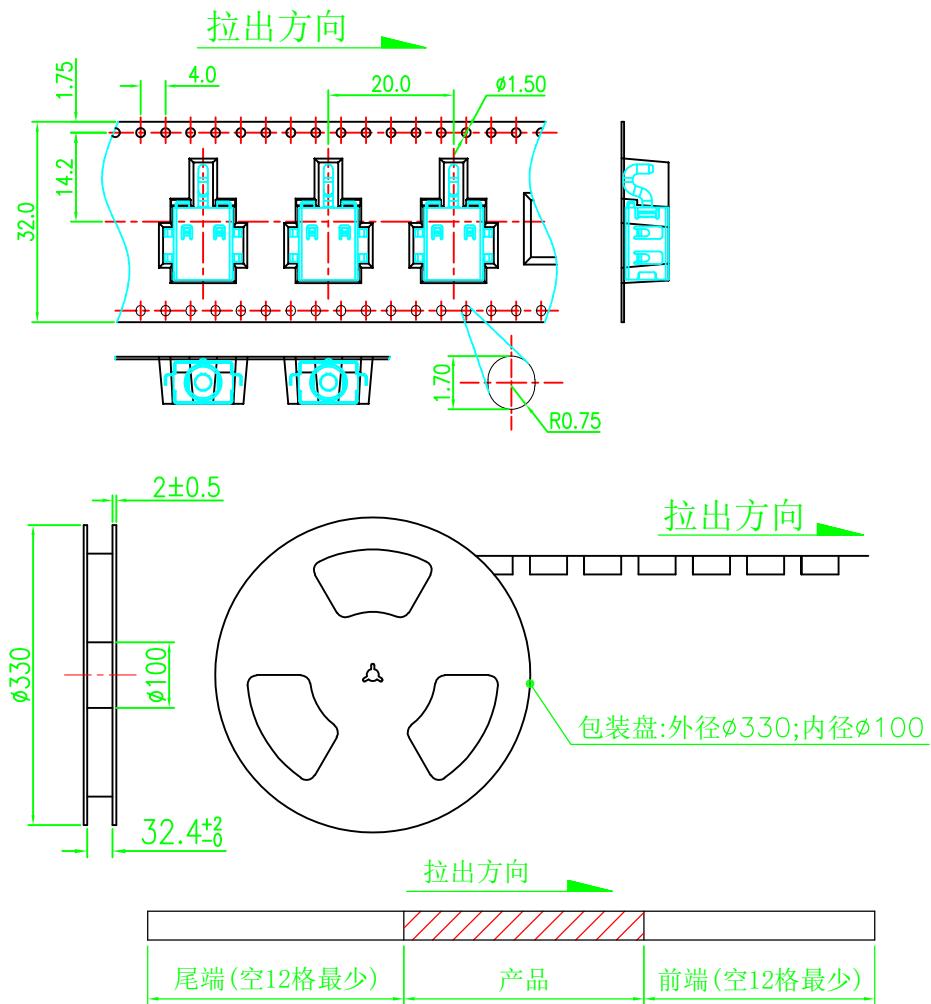

备注:


- 材料规格:
 - 载带: $T=0.50\text{mm}$
 - 包装盘: 蓝色
 - 纸箱: $L=335, W=335, H=380$
- 包装数量:
400PCS/卷, 10卷(4000PCS)/箱
- 上盖带拔离力: $0.1\text{N}\sim 0.7\text{N}$ ($10\sim 70\text{gf}$);
拔离角度: $165^\circ\sim 180^\circ$;
拔离速度: 300mm/分钟.




总共10层




PE袋:



外箱, 1PCS

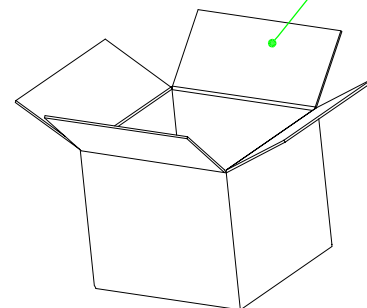

透明胶带

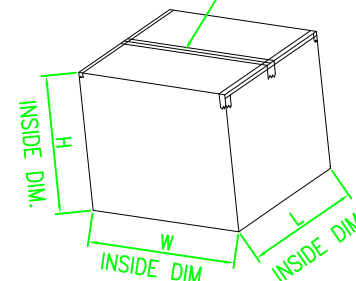

UNLESS OTHERWISE
SPECIFIED TOLERANCES



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	±0.50	X.	±2°
X.X	±0.30	X.X	±1°
X.XX	±0.20	X.XX	±0.5°
X.XXX	±0.10	X.XXX	±0.1°



UNIT:
mm

DESIGN:

Tony

2022.4.6

CHECK:

APPROVED

Andy

2022.4.6

PART NAME:

Φ5.5 卧式 DC POWER JACK

PART NO.

XB-DC550200-1160-20000H

SHEET: 1/1

REV.: A1

DRAWING NO

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------