
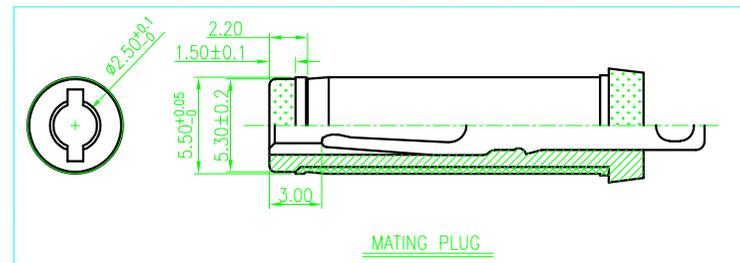


SPECIFICATIONS:

- ELECTRICAL CHARACTERISTICS:
  - 1-1. RATING: DC 20V, 10A Min.
  - 1-2. CONTACT RESISTANCE: 30 mΩ Max. (INITIAL)
  - 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE.
  - 1-4. INSULATION RESISTANCE: 100 MΩ Min. MEASURED BY 500V DC.
- MECHANICAL CHARACTERISTICS:
  - 2-1. INSERTION FORCE : 3.0 KGF Max.
  - 2-2. WITHDRAWAL FORCE : 0.35 KGF Min.
- LIFE TEST: 5000 CYCLES MIN.

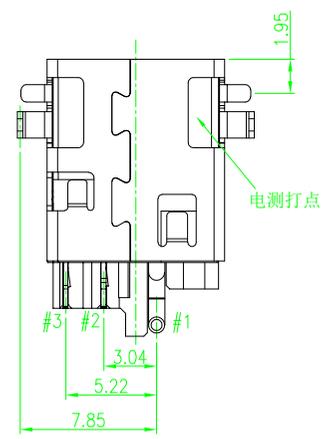

⑥	TERMINAL	1	SUS301	N/A
⑤	SHELL	1	C2680R-EH	Ni 50U"
④	CENTER PIN(+)	1	HBI59-1	Gold Flash Over Ni 50U"
③	SHUNT TERMINAL	1	C2680R-EH	Gold Flash On Contact Area; 100U" Sn On Solder Tail; All Over Ni 50U" Min.
②	TIP SPRING(-)	1	C5210R-EH	
①	HOUSING	1	LCP UL 94V-0 (HF)	Black







UNLESS OTHERWISE SPECIFIED TOLERANCES

**XB** 东莞市溪榜电子有限公司  
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DESIGN:	Tony	2021.10.28	PART NAME:	DC JACK
CHECK:			PART NO.:	XB-DC550250-1054-20000H
APPROVED:	Andy	2021.10.28	SHEET:	1/1
			REV.:	A1

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

COVER TAPE  
PEELING ANGLE:165°~180°  
PEELING FORCE:20~130g

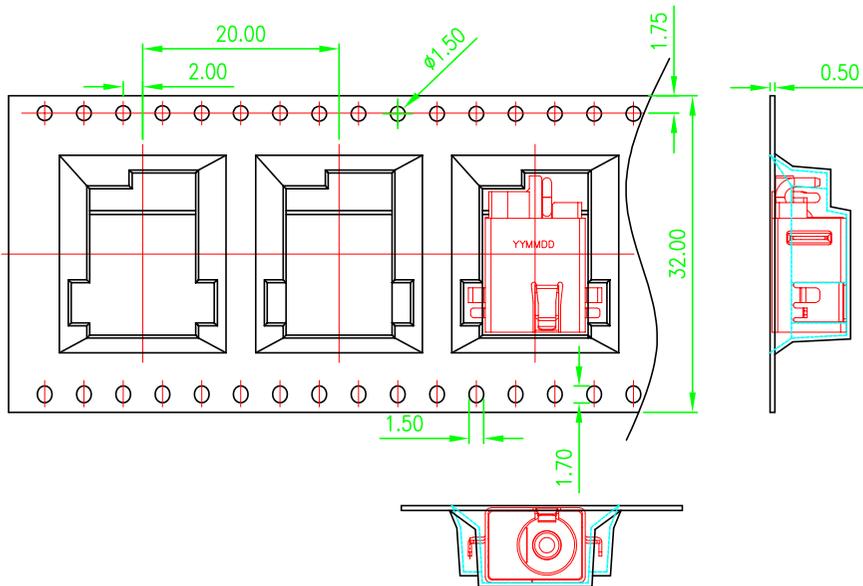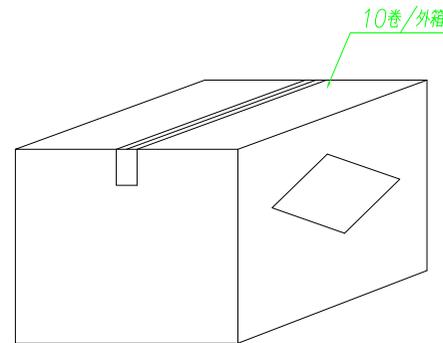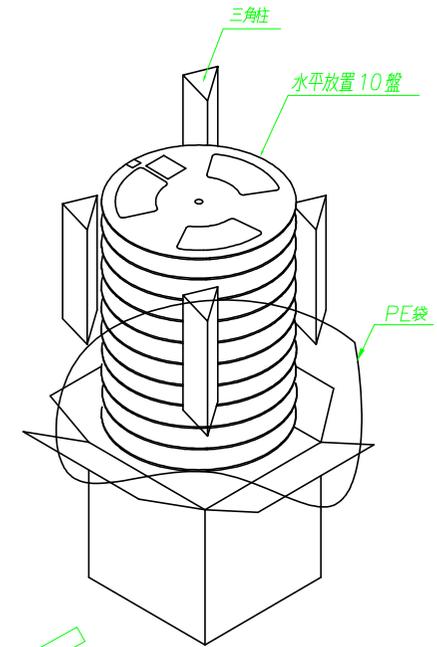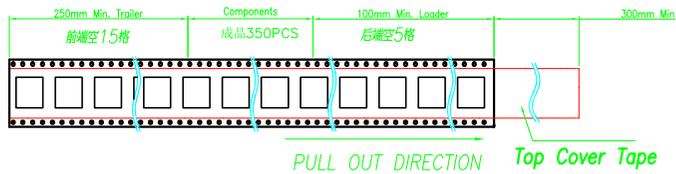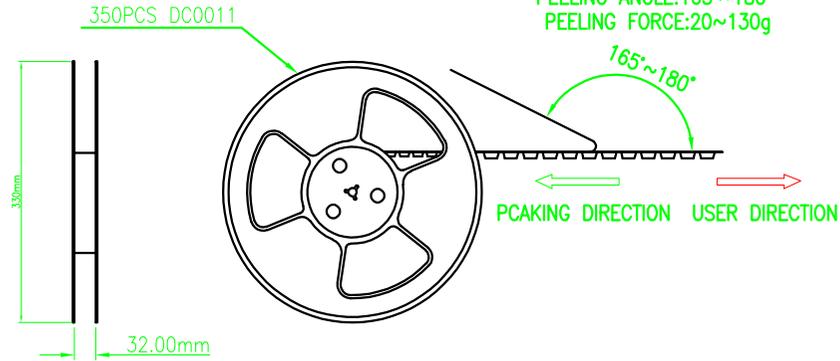

名称	规格	用量(PCS)
成品		3500
载带		10
保护带		10
三角柱	360x325	4
PE袋	660x640x0.03	1
外箱	350X350X400	1

UNLESS OTHERWISE SPECIFIED TOLERANCES

**XB** 东莞市溪榜电子有限公司  
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DESIGN:	Tony	PART NAME: DC JACK -???
CHECK:		
APPROVED:	Andy	PART NO.: XB-DC550250-1054-20000H
	2021.10.28	SHEET: 1/1
	2021.10.28	REV.: A1

DECIMALS: DIM TOL DIM TOL  
X. ±0.50 X. ±2  
X.X ±0.30 X.X ±1  
X.XX ±0.20 X.XX  
X.XXX ±0.10 X.XXX

ANGLES: DIM TOL  
X. ±2  
X.X ±1  
X.XX  
X.XXX

UNIT: mm  
3RD ANGLE PROJECTION

REV	ECN NO.	DESCRIPTION	DESIGN	DATE
8				
7				
6				
5				