



H=14.0MM

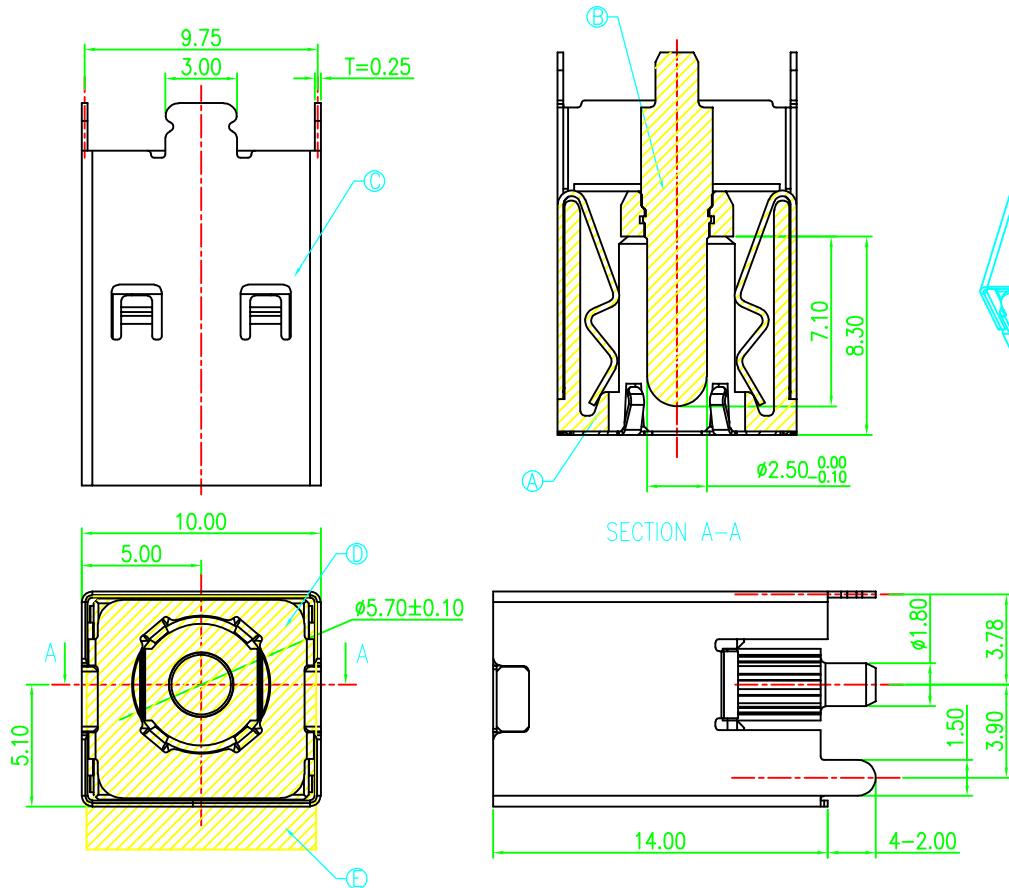


SPECIFICATION:

1. RATING: DC 20V 20A
2. CONTACT RESISTANCE:
30mΩ MAX.(INITIAL)
50mΩ MAX.(FINAL)
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 3N~30N
6. EXTRACTION FORCE: 3N~30N
7. DURABILITY: 5,000 CYCLES




E	MYLAR			1
D	GROUND	SUS 304		1
C	SHELL	COPPER ALLOY	Ni 40u"MIN.	1
B	CENTER PIN	BRASS	GOLD FLASH/Ni 40u" MIN.	1
A	HOUSING	HIGH TEMP.THERMOPLASTIC	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

UNLESS OTHERWISE SPECIFIED TOLERANCES		DESIGN: Tony 2022.4.15		PART NAME: Φ 5.5 立式 (H=14.0) DC POWER JACK
DECIMALS: ANGLES:		CHECK:		
DIM	TOL	DIM	TOL	
X.	±0.50	X.	±2°	
XX	±0.30	XX	±1°	
XXX	±0.20	XXX		
XXXX	±0.10	XXXX		
3RD ANGLE PROJECTION		UNIT: mm	APPROVED: Andy	2022.4.15
				DRAWING NO: 1/1 REV.: A1

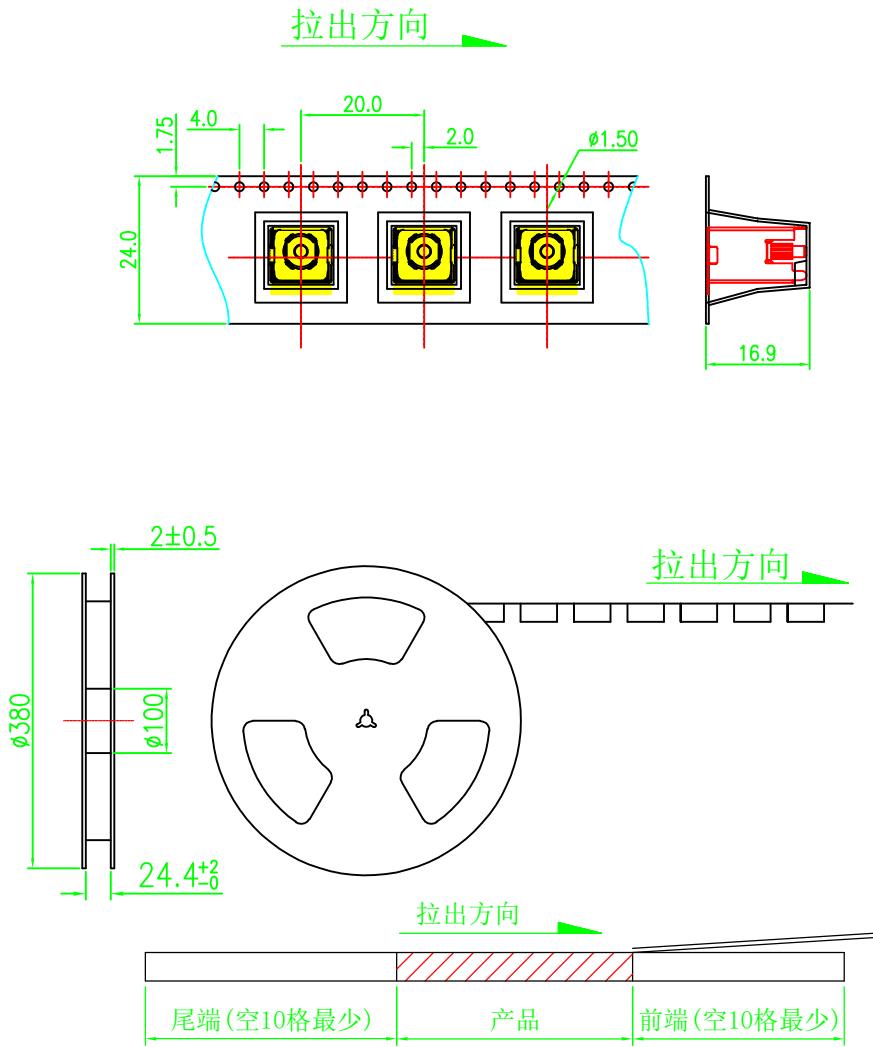

备注:

1. 材料规格:
 - 1.1 载带: $T=0.50\text{mm}$
 - 1.2 包装盘: 蓝色
 - 1.3 纸箱: $L=385, W=385, H=300$
2. 包装数量: 250PCS/卷, 10卷(2500PCS)/箱
3. 上盖带拔离力: $0.1\text{N} \sim 0.7\text{N}$ (10~70gf);
拔离角度: $165^\circ \sim 180^\circ$;
拔离速度: 300mm/分钟.

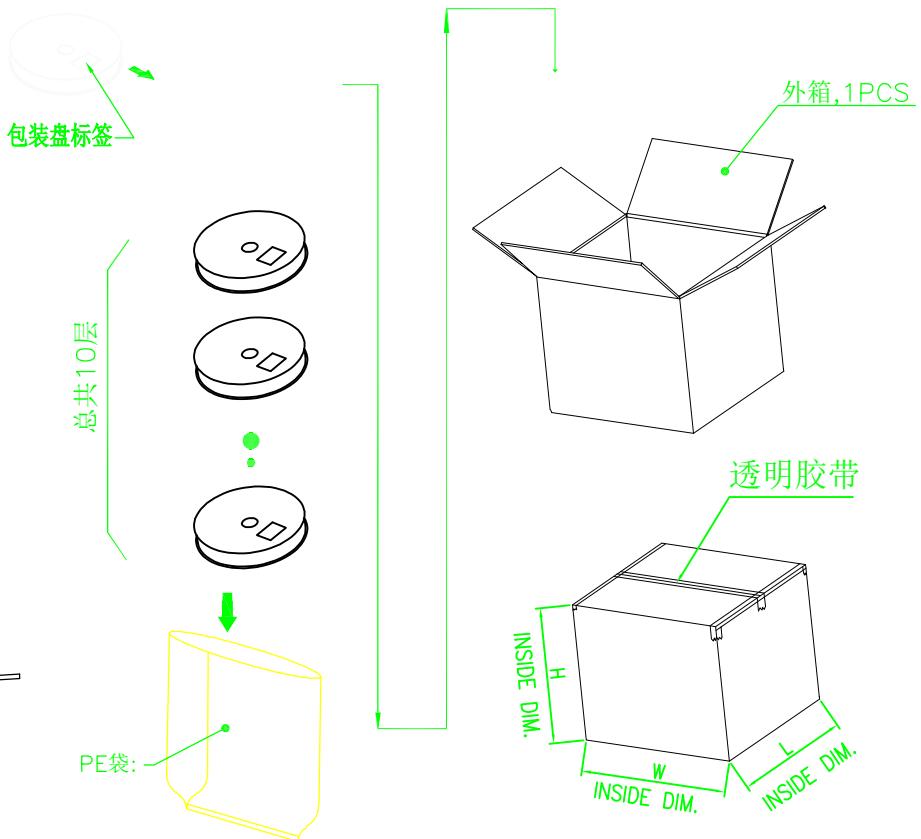

UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS: ANGLES:

DIM	TOL	DIM	TOL
X.	± 0.50	X.	$\pm 2^\circ$
XX	± 0.30	XX	$\pm 1^\circ$
XXX	± 0.20	XXX	
XXXX	± 0.10	XXXX	

3RD ANGLE PROJECTION

UNIT: mm

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DESIGN:	Tony	PART NAME:
	2022.4.15	DC POWER JACK
CHECK:		包装图
APPROVED:	Andy-liu	PART NO.
		XB-DC550250-1077-2000H
		SHEET: 1/1 REV.: A1
		DRAWING NO