

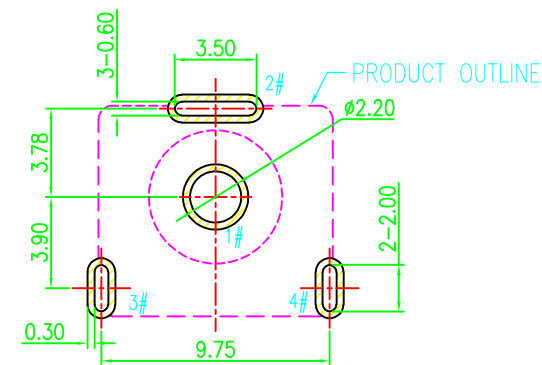
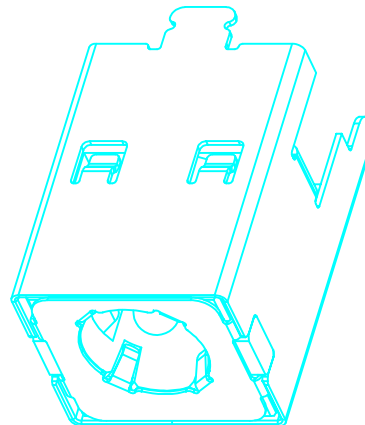
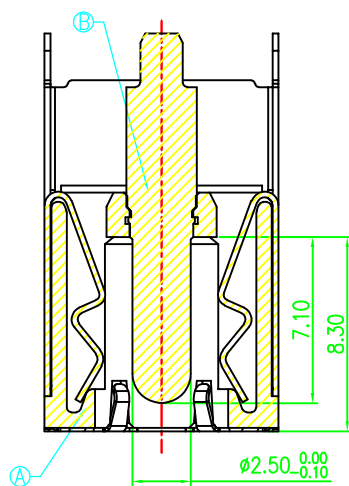
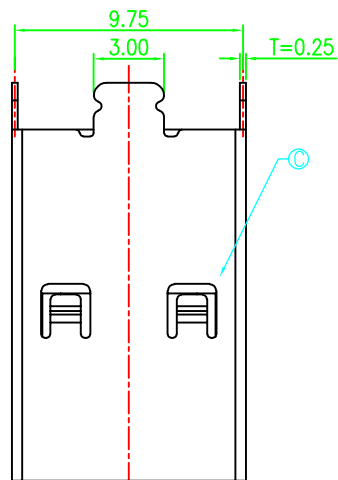
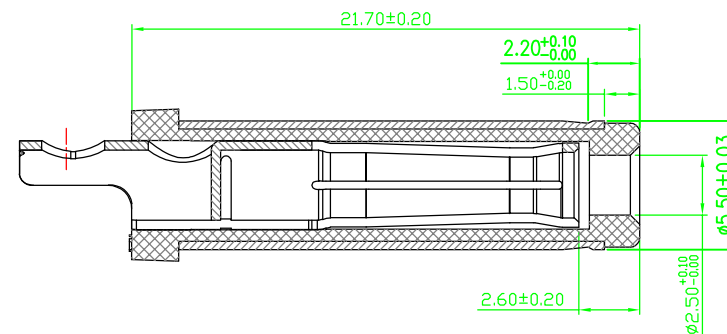


H=15.0MM

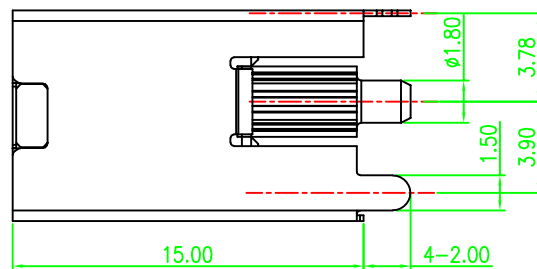


RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE: ±0.05

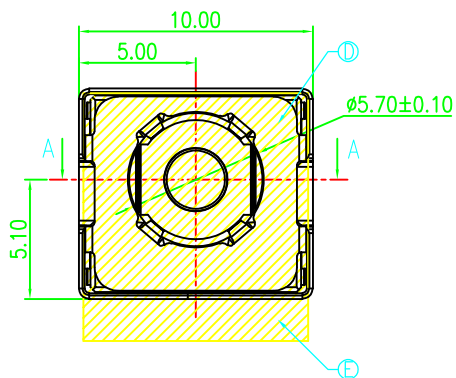

MATING PLUG
DP550250-0188-60000H

SPECIFICATION:

1. RATING: DC 20V 20A
2. CONTACT RESISTANCE:
30mΩ MAX.(INITIAL)
50mΩ MAX.(FINAL)
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 3N~30N
6. EXTRACTION FORCE: 3N~30N
7. DURABILITY: 5,000 CYCLES



E	MYLAR			1
D	GROUND	SUS 304		1
C	SHELL	COPPER ALLOY	Ni 40u" MIN.	1
B	CENTER PIN	BRASS	GOLD FLASH/Ni 40u" MIN.	1
A	HOUSING	HIGH TEMP.THERMOPLASTIC	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY


UNLESS OTHERWISE
SPECIFIED TOLERANCES

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.


DECIMALS:	ANGLES:	DESIGN:	Tony	PART NAME:
DIM TOL	DIM TOL		2022.4.15	Φ 5.5 立式 (H=15.0)
X. ±0.50	X. ±2°	CHECK:		DC POWER JACK
X.X ±0.30	X.X ±1°			PART NO.
X.XX ±0.20	X.XX	APPROVED	Andy	XB-DC550250-1078-20000H
X.XXX ±0.10	X.XXX		2022.4.15	SHEET: 1/1 REV.: A1
3RD ANGLE PROJECTION	UNIT: mm			DRAWING NO

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------


拉出方向

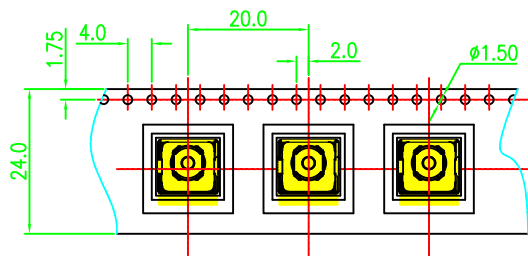

拉出方向

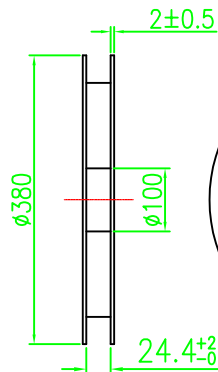

拉出方向




备注:

- 材料规格:
 - 载带: $T=0.50\text{mm}$
 - 包装盘: 蓝色
 - 纸箱: $L=385, W=385, H=300$
- 包装数量:
250PCS/卷, 10卷(2500PCS)/箱
- 上盖带剥离力: $0.1\text{N}\sim 0.7\text{N}$ (10~70gf);
剥离角度: $165^\circ\sim 180^\circ$;
剥离速度: 300mm/分钟.




包装盘标签

总共10层

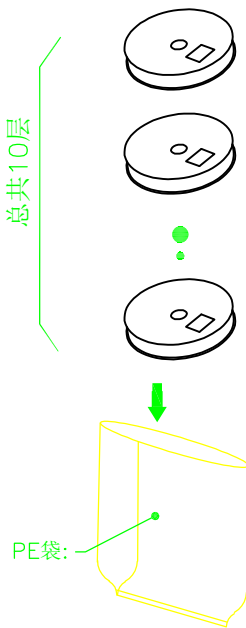


PE袋:

外箱, 1PCS



透明胶带



UNLESS OTHERWISE
SPECIFIED TOLERANCES

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME:		
DIM	TOL	DIM	TOL	CHECK:	2022.4.15	DC POWER JACK		
X.	±0.50	X.	±2°		APPROVED	Andy-liu	包装图	
X.X	±0.30	X.X	±1°	3RD ANGLE PROJECTION			2022.4.15	PART NO.
X.XX	±0.20	X.XX	——		UNIT: mm			XB-DC550250-1078-20000
X.XXX	±0.10	X.XXX	——					SHEET: 1/1
						DRAWING NO		

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------