

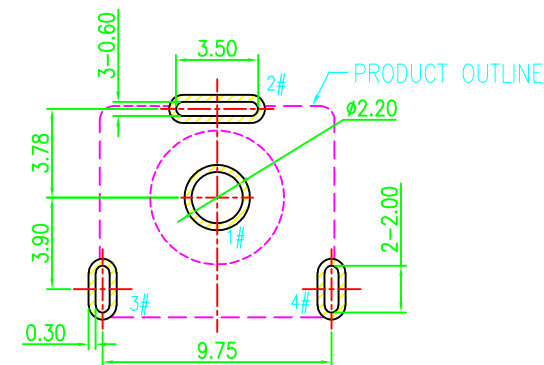
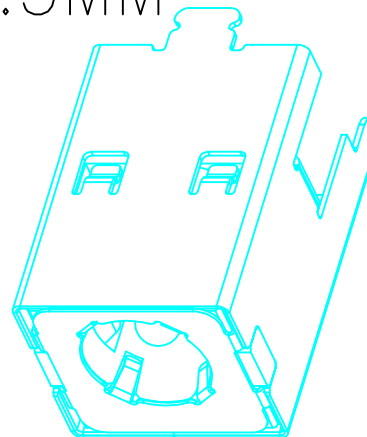
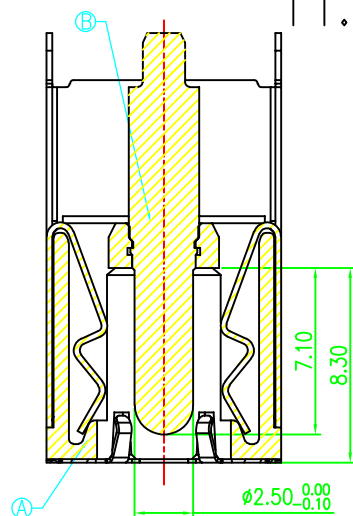
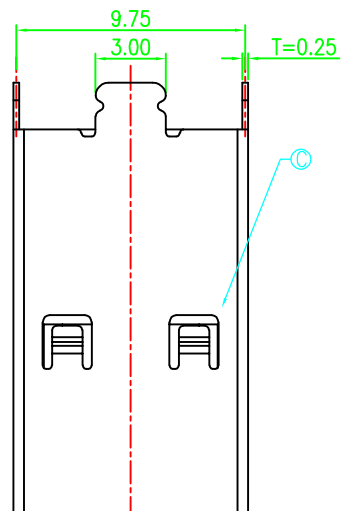
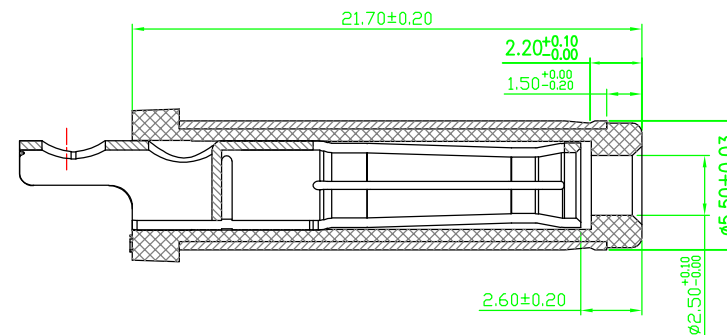


H:16.3MM

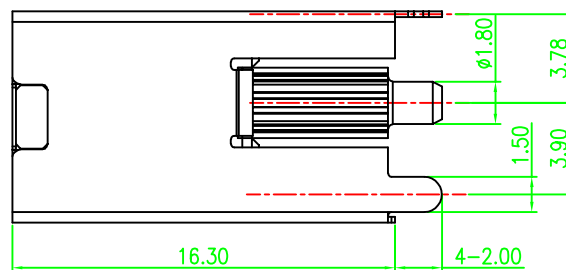


RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE: ± 0.05

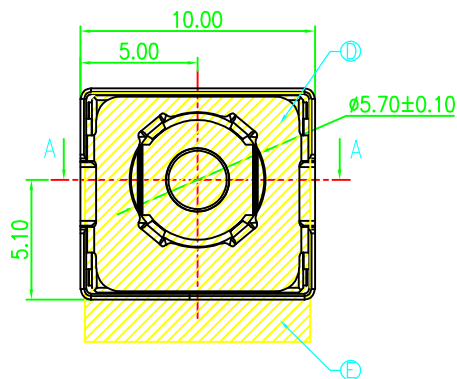

MATING PLUG
DP550250-0188-60000H

SPECIFICATION:

1. RATING: DC 20V 20A
2. CONTACT RESISTANCE:
30m Ω MAX.(INITIAL)
50m Ω MAX.(FINAL)
3. INSULATION RESISTANCE: 100 M Ω MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 3N~30N
6. EXTRACTION FORCE: 3N~30N
7. DURABILITY: 5,000 CYCLES



E	MYLAR			1
D	GROUND	SUS 304		1
C	SHELL	COPPER ALLOY	Ni 40u"MIN.	1
B	CENTER PIN	BRASS	GOLD FLASH/Ni 40u" MIN.	1
A	HOUSING	HIGH TEMP.THERMOPLASTIC	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY



UNLESS OTHERWISE
SPECIFIED TOLERANCES

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME: Φ5.5 立式(H=16.3) DC POWER JACK
DIM	TOL	DIM	TOL		2022.4.15	
X.	±0.50	X.	±2°	CHECK:		PART NO. XB-DC550250-1079-20000H SHEET: 1/1 REV.: A1 DRAWING NO
X.X	±0.30	X.X	±1°			
X.XX	±0.20	X.XX				
X.XXX	±0.10	X.XXX				
3RD ANGLE PROJECTION		UNIT: mm		APPROVED	Andy	
					2022.4.15	

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

拉出方向

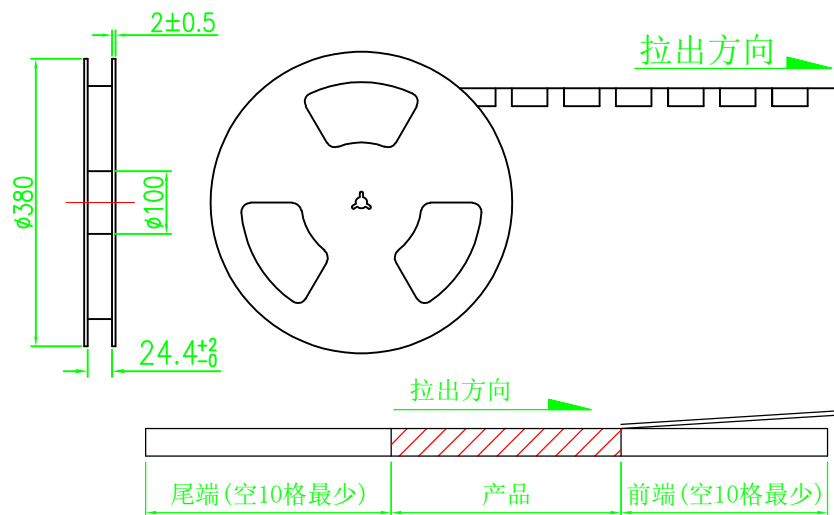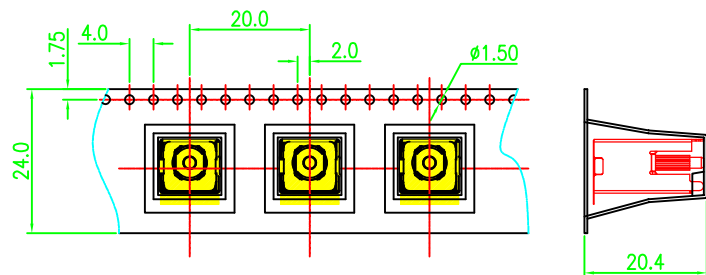

备注:

- 材料规格:
 - 1.1 载带:T=0.50mm
 - 1.2 包装盘:蓝色
 - 1.3 纸箱: L=385,W=385,H=300
- 包装数量:
250PCS/卷, 10卷(2500PCS)/箱
- 上盖带拔离力: 0.1N~0.7N(10~70gf);
拔离角度: 165°~180°;
拔离速度: 300mm/分钟.

包装盘标签

总共10层

PE袋:

外箱,1PCS

透明胶带

INSIDE DIM.

INSIDE DIM.

INSIDE DIM.

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	±0.50	X.	±2°
X.X	±0.30	X.X	±1°
X.XX	±0.20	X.XX	—
X.XXX	±0.10	X.XXX	—

3RD ANGLE PROJECTION UNIT: mm

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DESIGN:	Tony
CHECK:	
APPROVED	Andy-liu
	2022.4.15

PART NAME:	
DC POWER JACK	
包装图	
PART NO.	
XB-DC550250-1079-20000H	
SHEET: 1/1	REV.: A1
DRAWING NO	

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------