

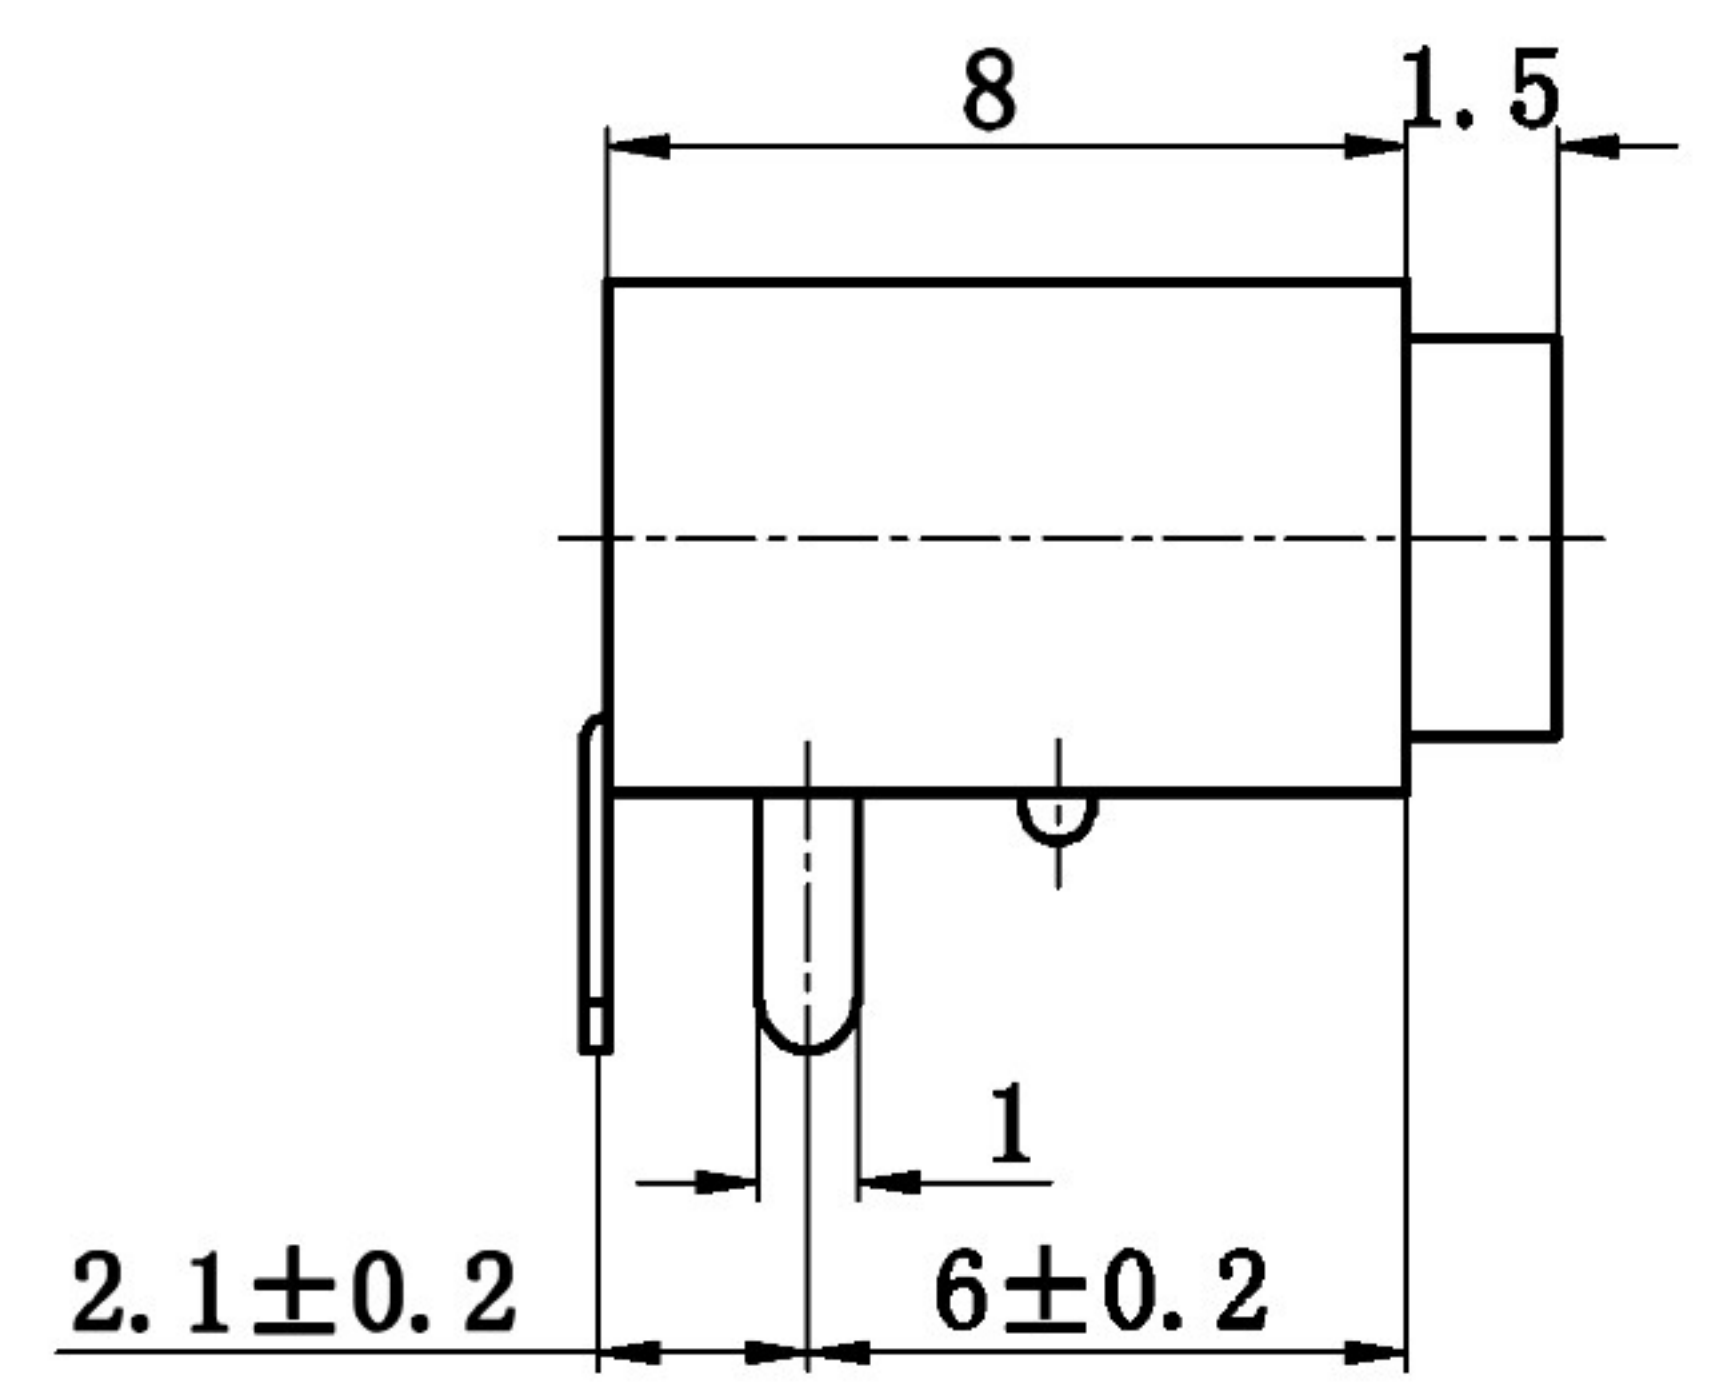
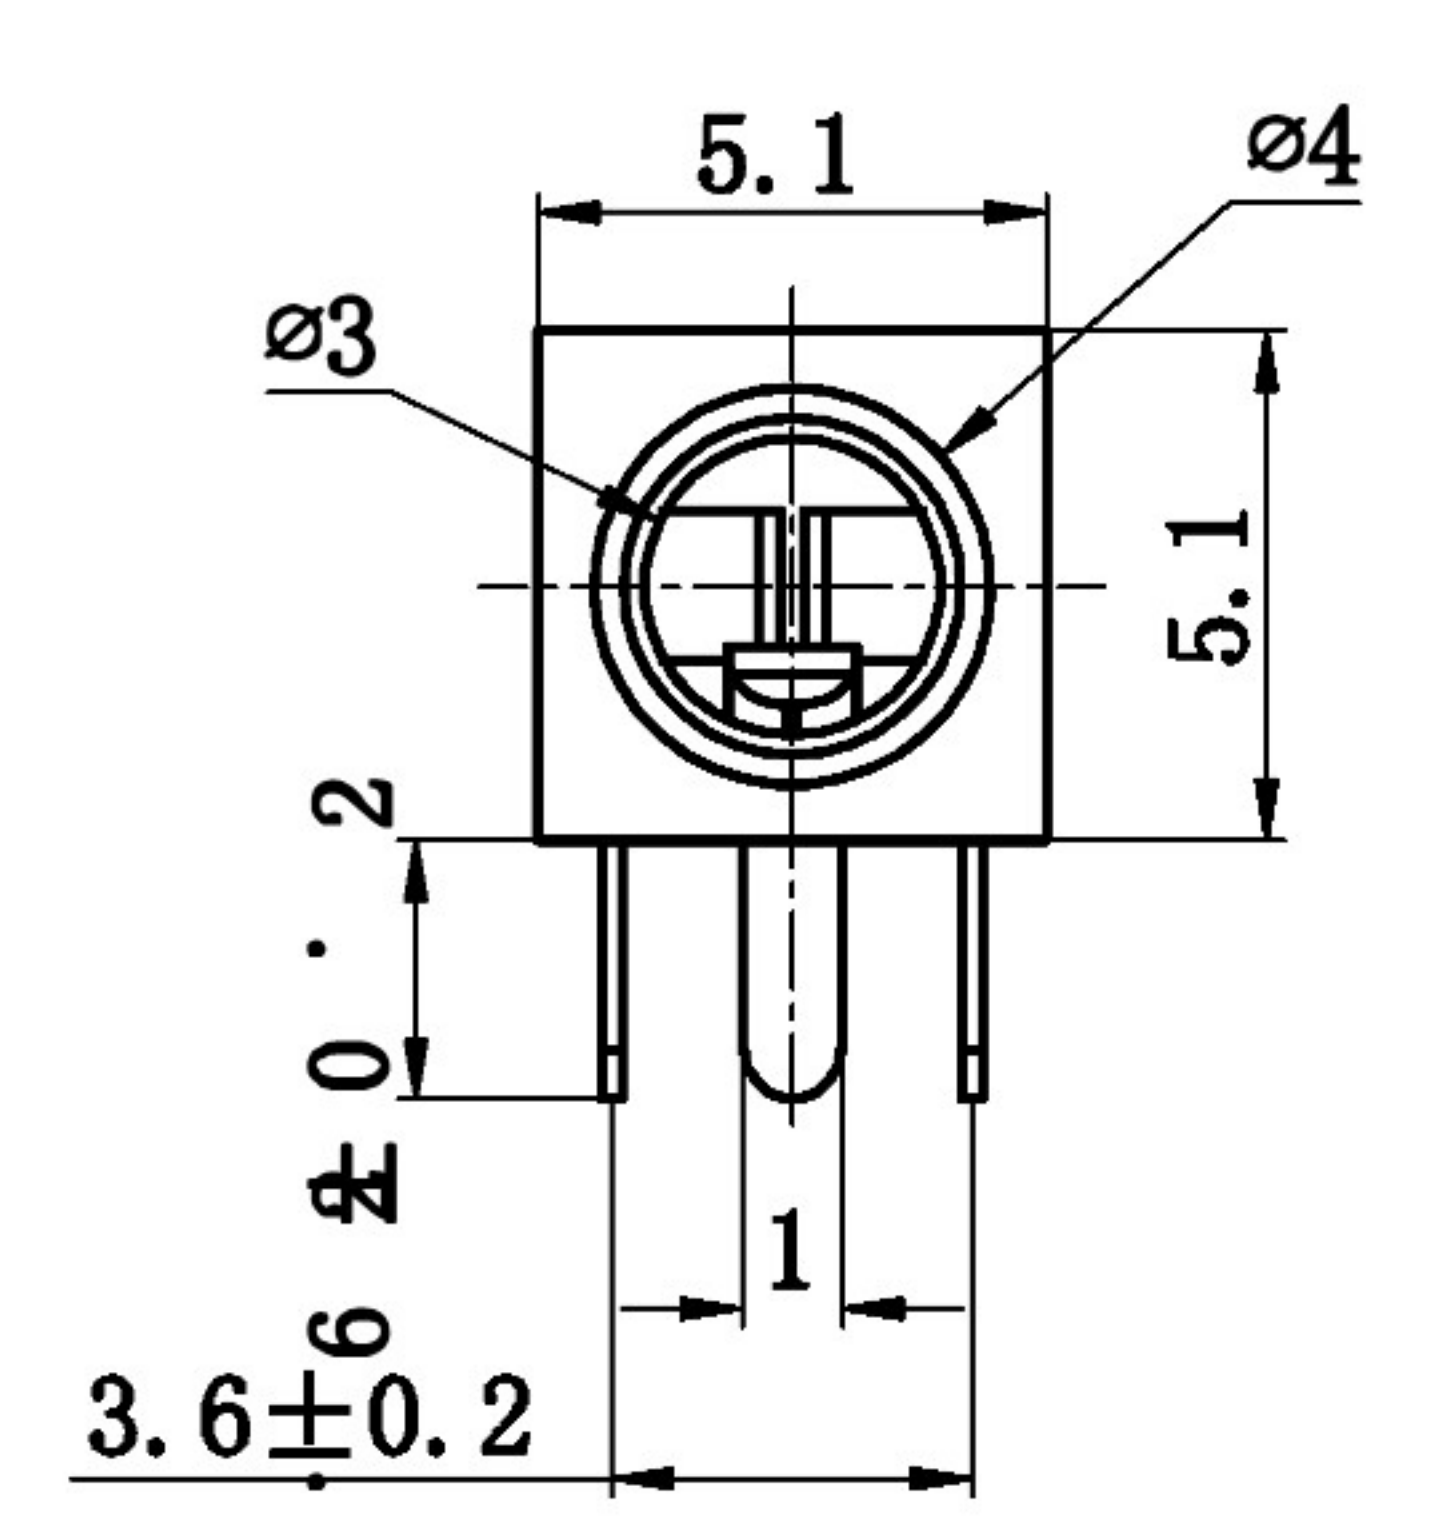



REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A		INITIAL	Kai	2018.06.14

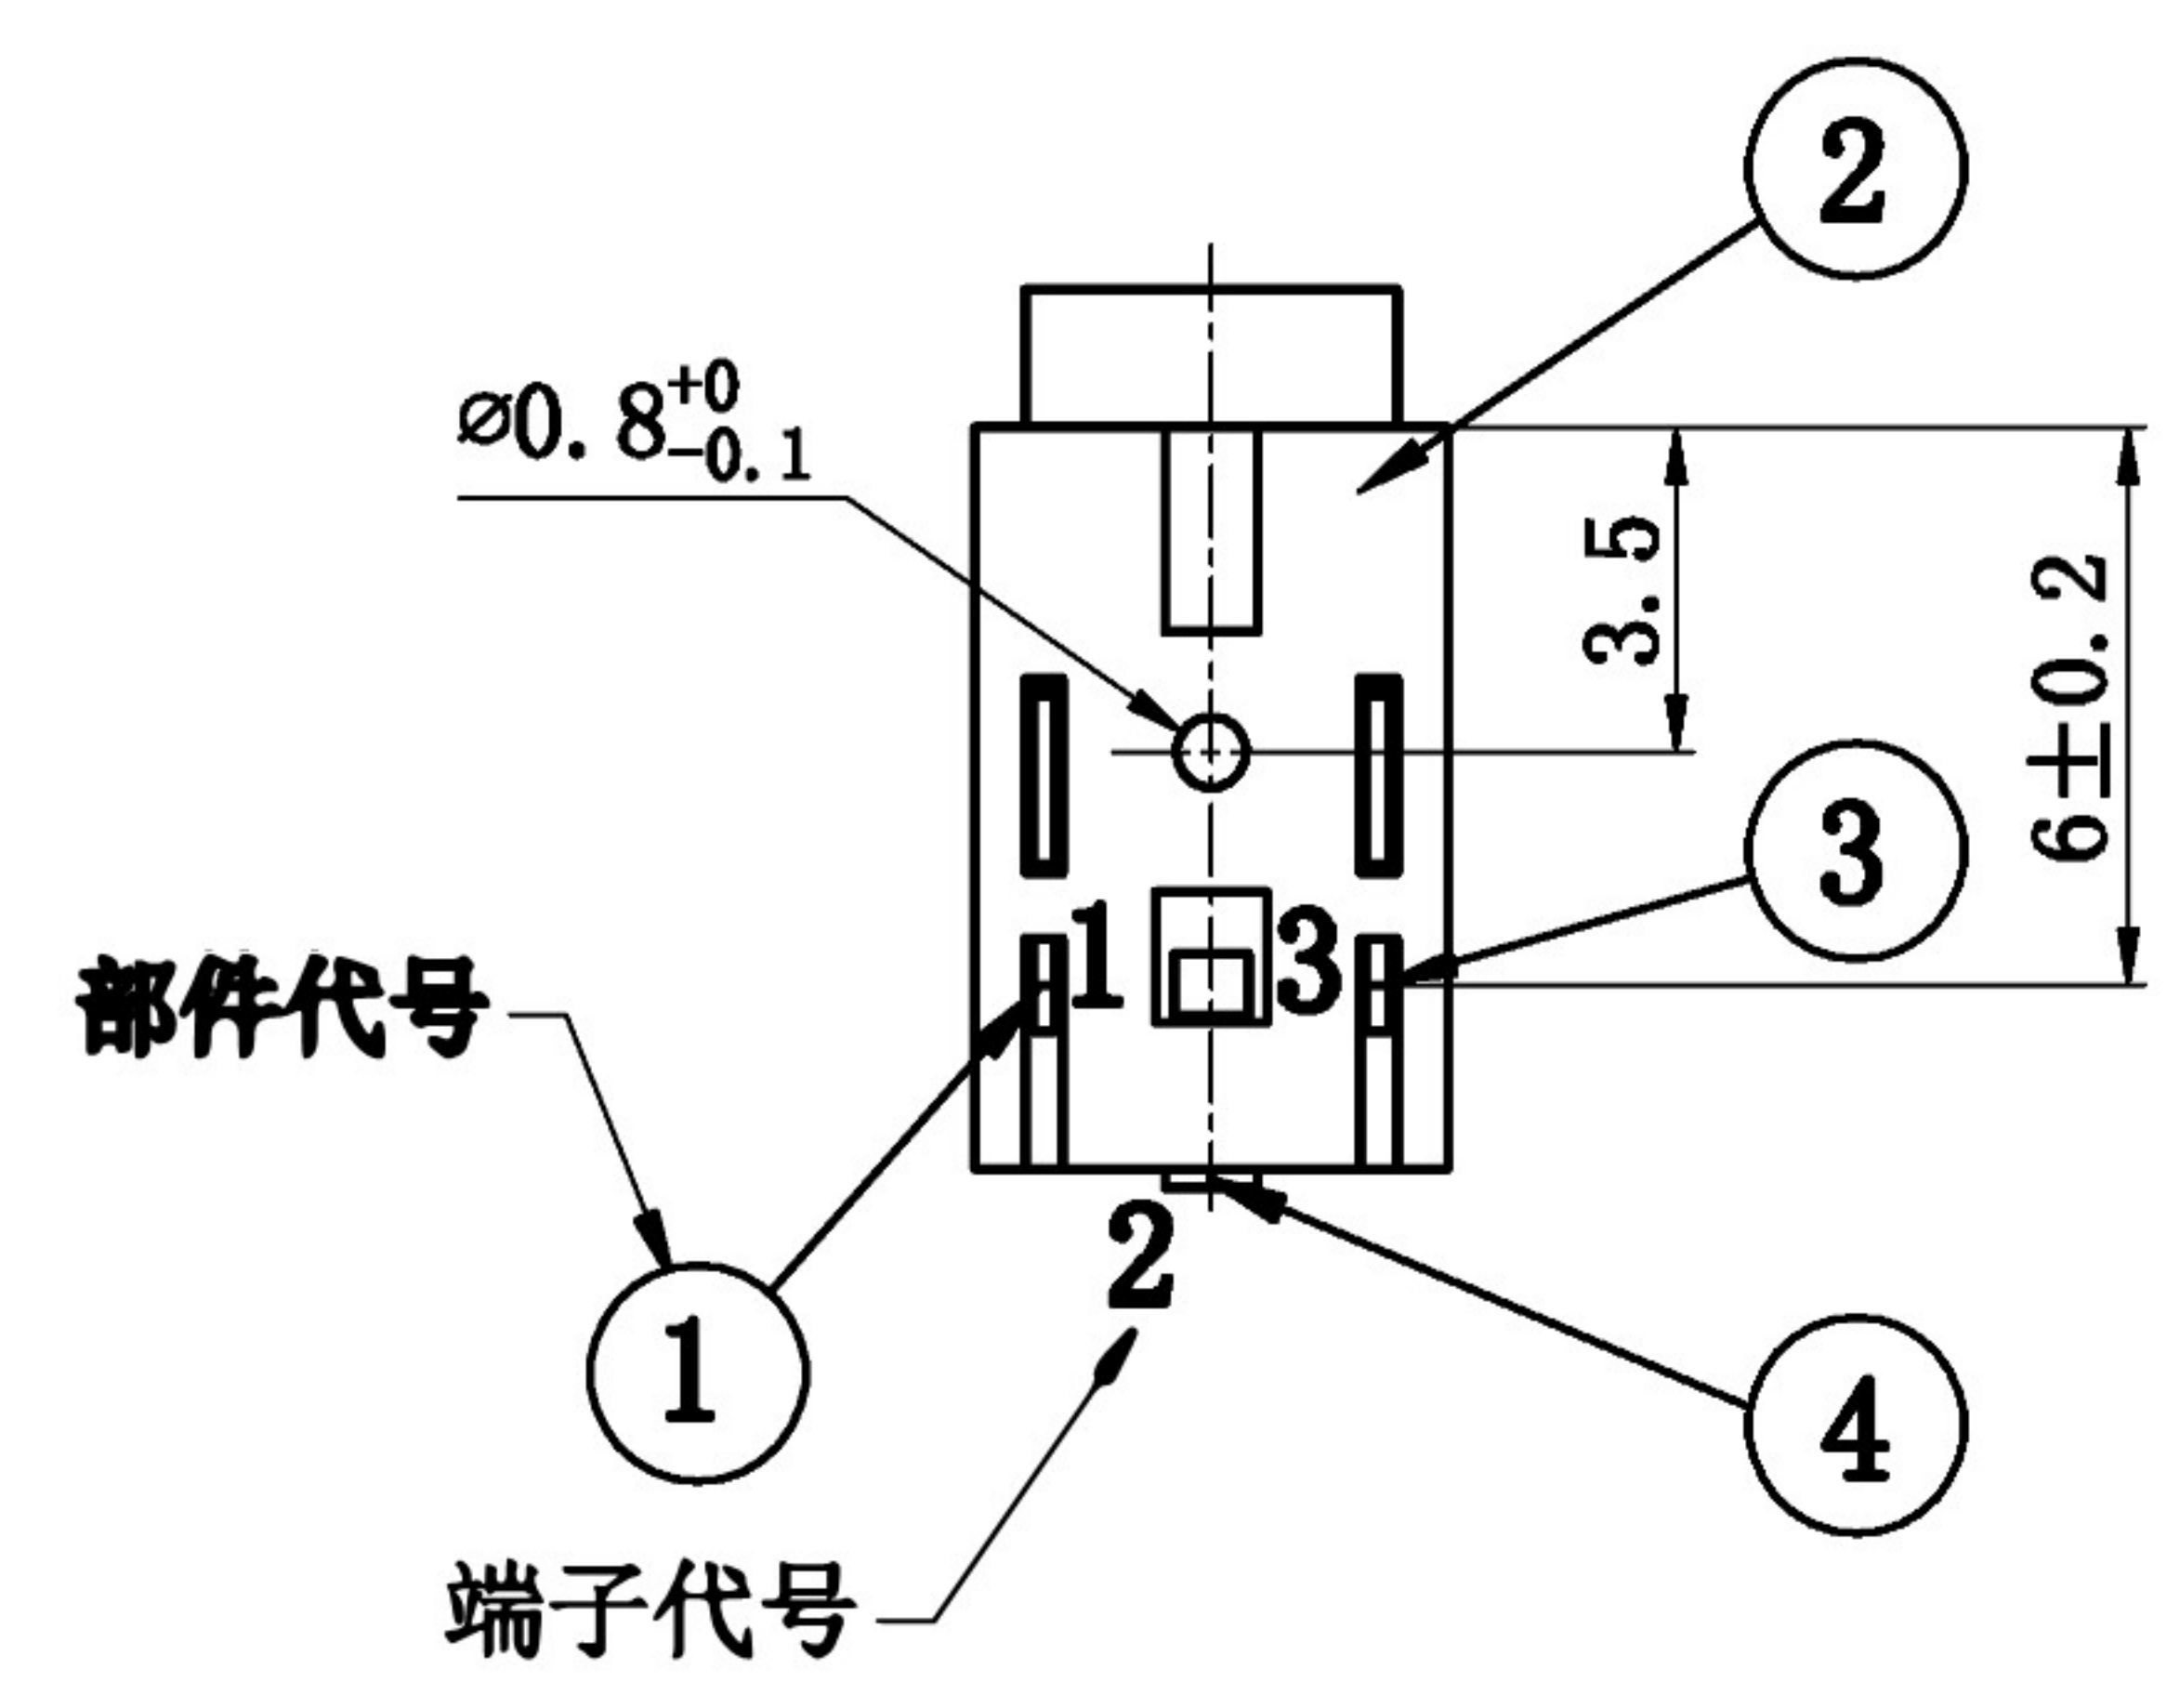

线路板开孔尺寸
(顶 视)

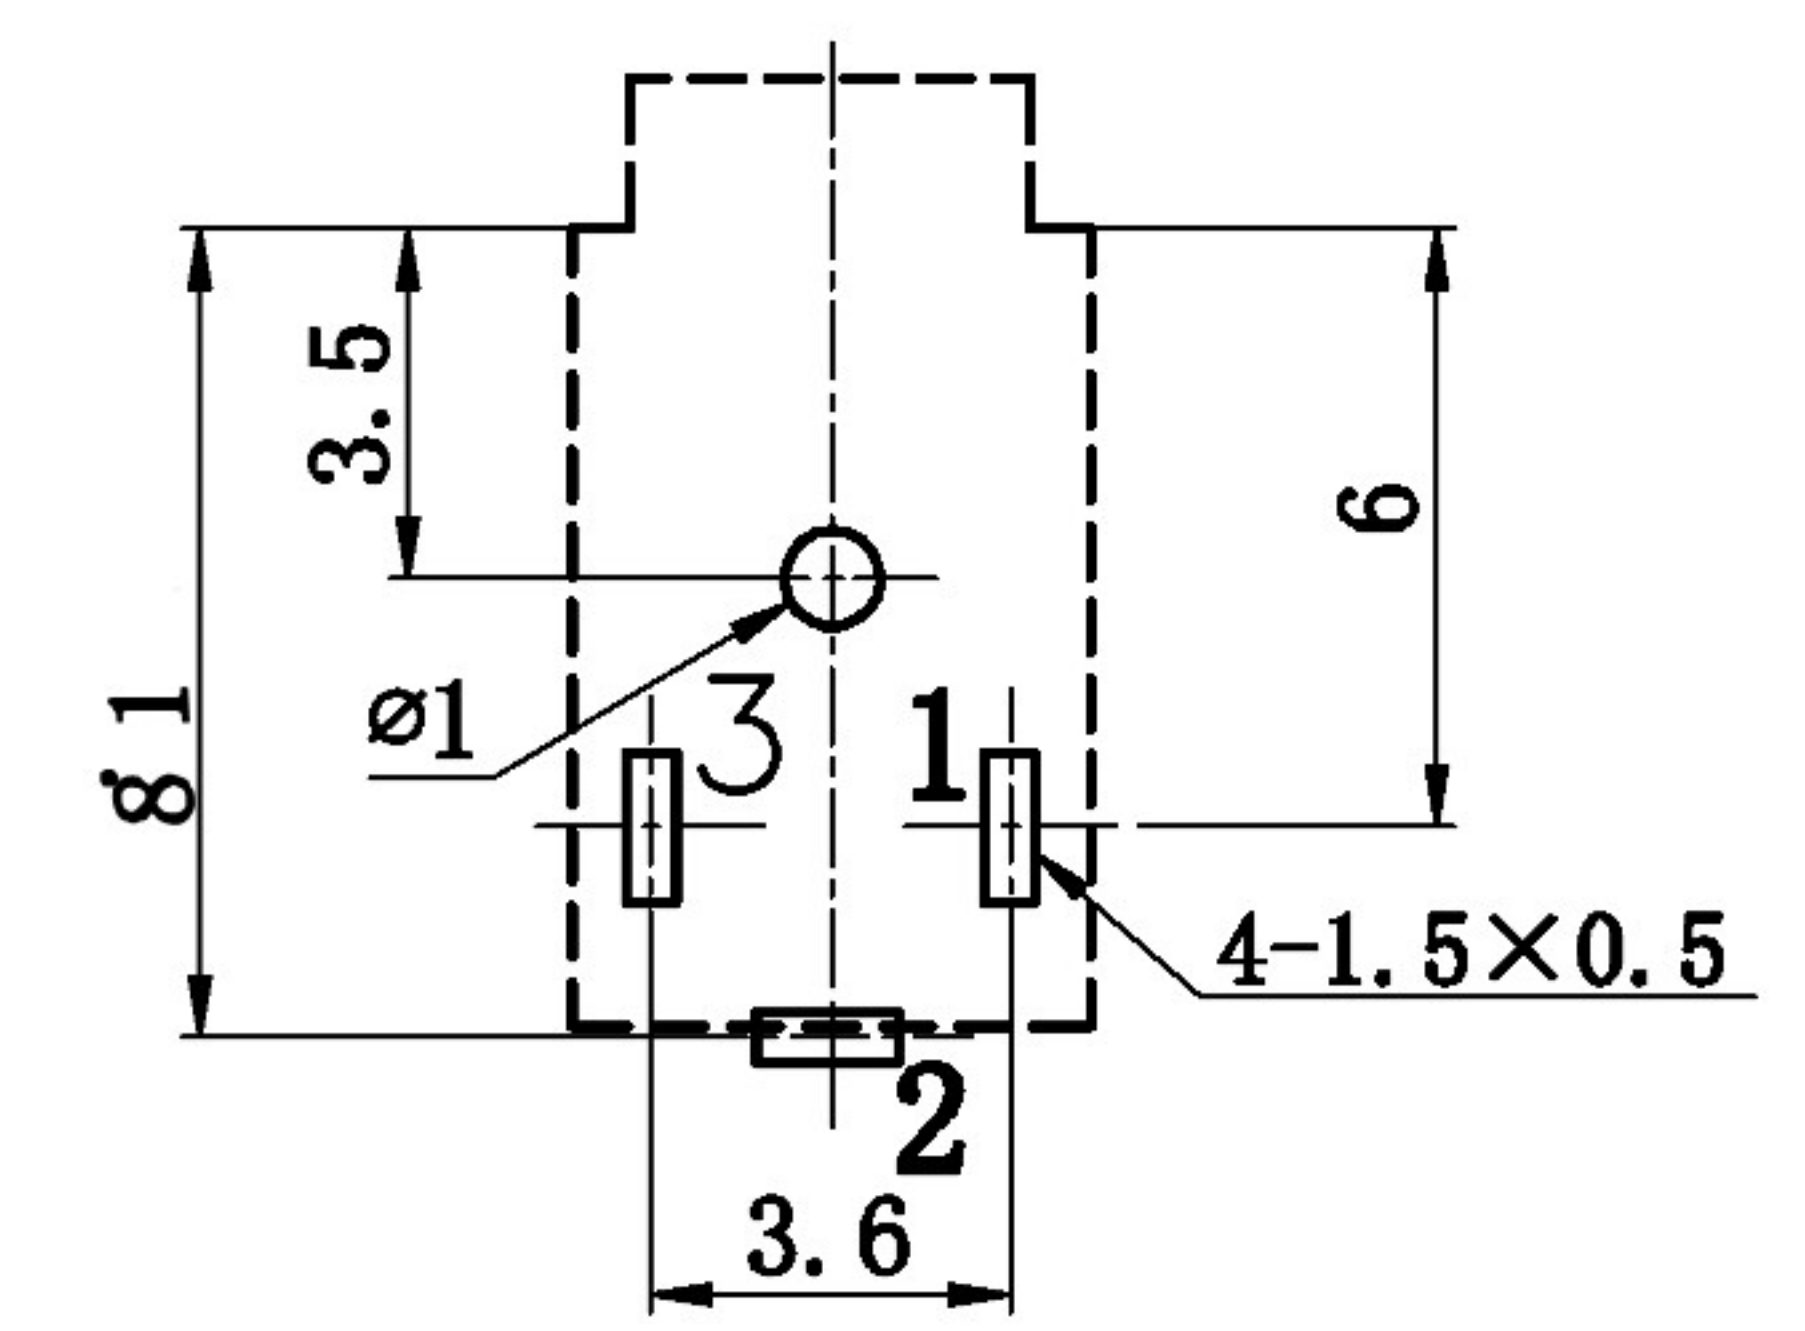

电路图

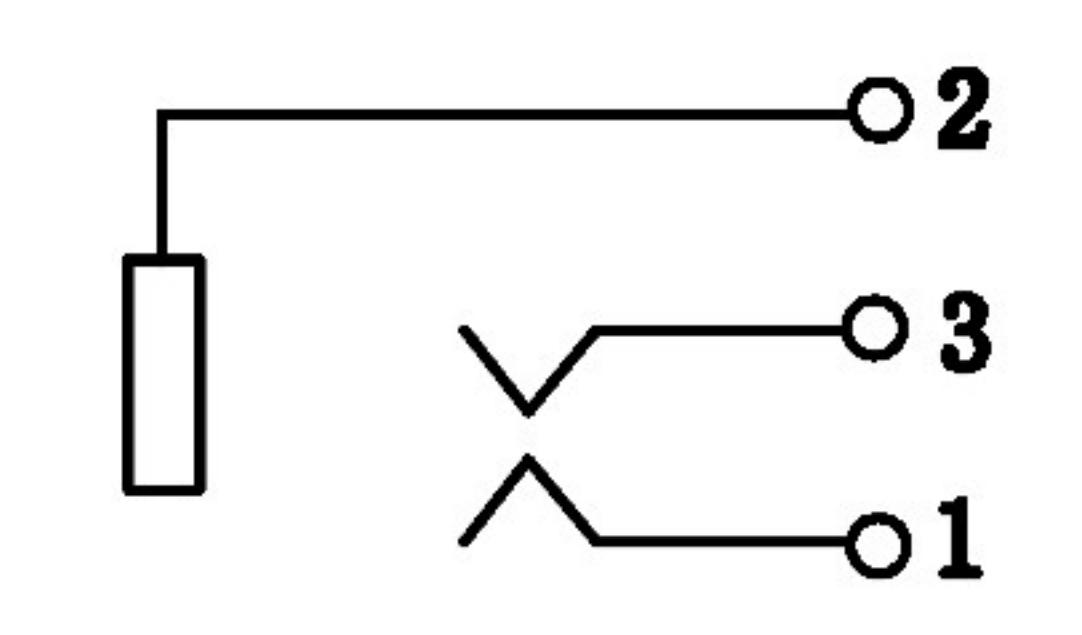

技术特性:
使用条件: -30~70°
额定负荷: DC30V 0.5A
接触电阻: ≤0.03Ω
绝缘电阻: ≥100MΩ
耐 压: AC500V(50Hz)/min
插 拔 力: 3~20N
寿 命: 5000次

							UNLESS OTHERWISE SPECIFIED TOLERANCES		XB Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.					
							DECIMALS:		ANGLES:		DWG NO. Q/XM-CP-RD-XXXX		PART NAME: PHONE JACK	
							DIM TOL		DIM TOL		DESIGN: Kai 2018.06.14		PART NO. PJ-210E	
							X. ±0.35		X. ±2°		CHECK: Lucky 2018.06.14		REV. A UNIT: mm SHEET: 1/1	
							X.X ±0.30		X.X ±1°		APPROVED Lucky 2018.06.14			
							X.XX ±0.20		X.XX					
							X.XXX ±0.10		X.XXX					