


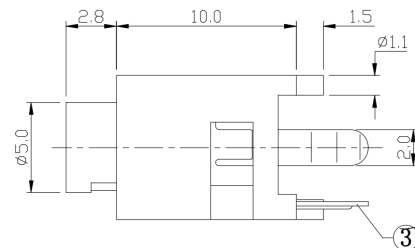



6		7	8	9	
REV.	ECN NO.	DESCRIPTION		DESIGN	DATE
A		INITIAL		Kai	2018.06.14

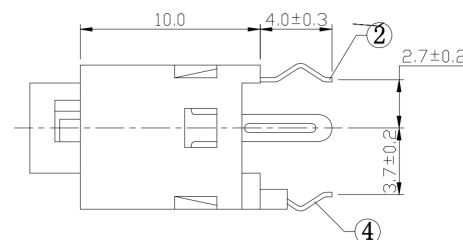

P.C.B LAYOUT TOP VIEW

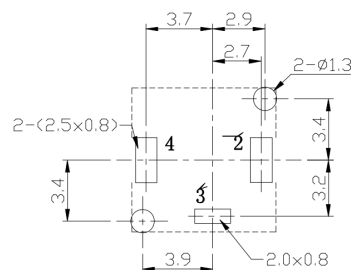

额定电负荷	DC 30V/0.5A
接触电阻	≤0.03Ω
绝缘电阻	≥100MΩ
耐 压	AC500V (50Hz)/min
插 拔 力	3~20N
使用温度范围	-30~70℃
使用寿命	5000次

UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS:		ANGLES	
DIM	TOL	DIM	TOL
X.	±0.35	X.	±2°
X.X	±0.30	X.X	±1°
X.XX	±0.20	X.XX	
X.XXX	+0.10	X.XXX	



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DWG NO.	Q/XM-CP-RD-XXXX
DESIGN:	Kai 2018.06.14
CHECK:	Lucky 2018.06.14
APPROVED	Lucky 2018.06.14

PART NAME: PHONE JACK			
PART NO. XB-PJ-215A			
REV. A	UNIT: mm	SHEET: 1 / 1	

4		盖脚	1	磷铜	0.25T	镀银
3		弹片脚	1	铍青铜	0.2T	镀银
2		中脚	3	磷铜	0.2T	镀银
1		底座	1	PPA		黑色
序号	产品编号	产品名称	数量	材料	规格	电镀