
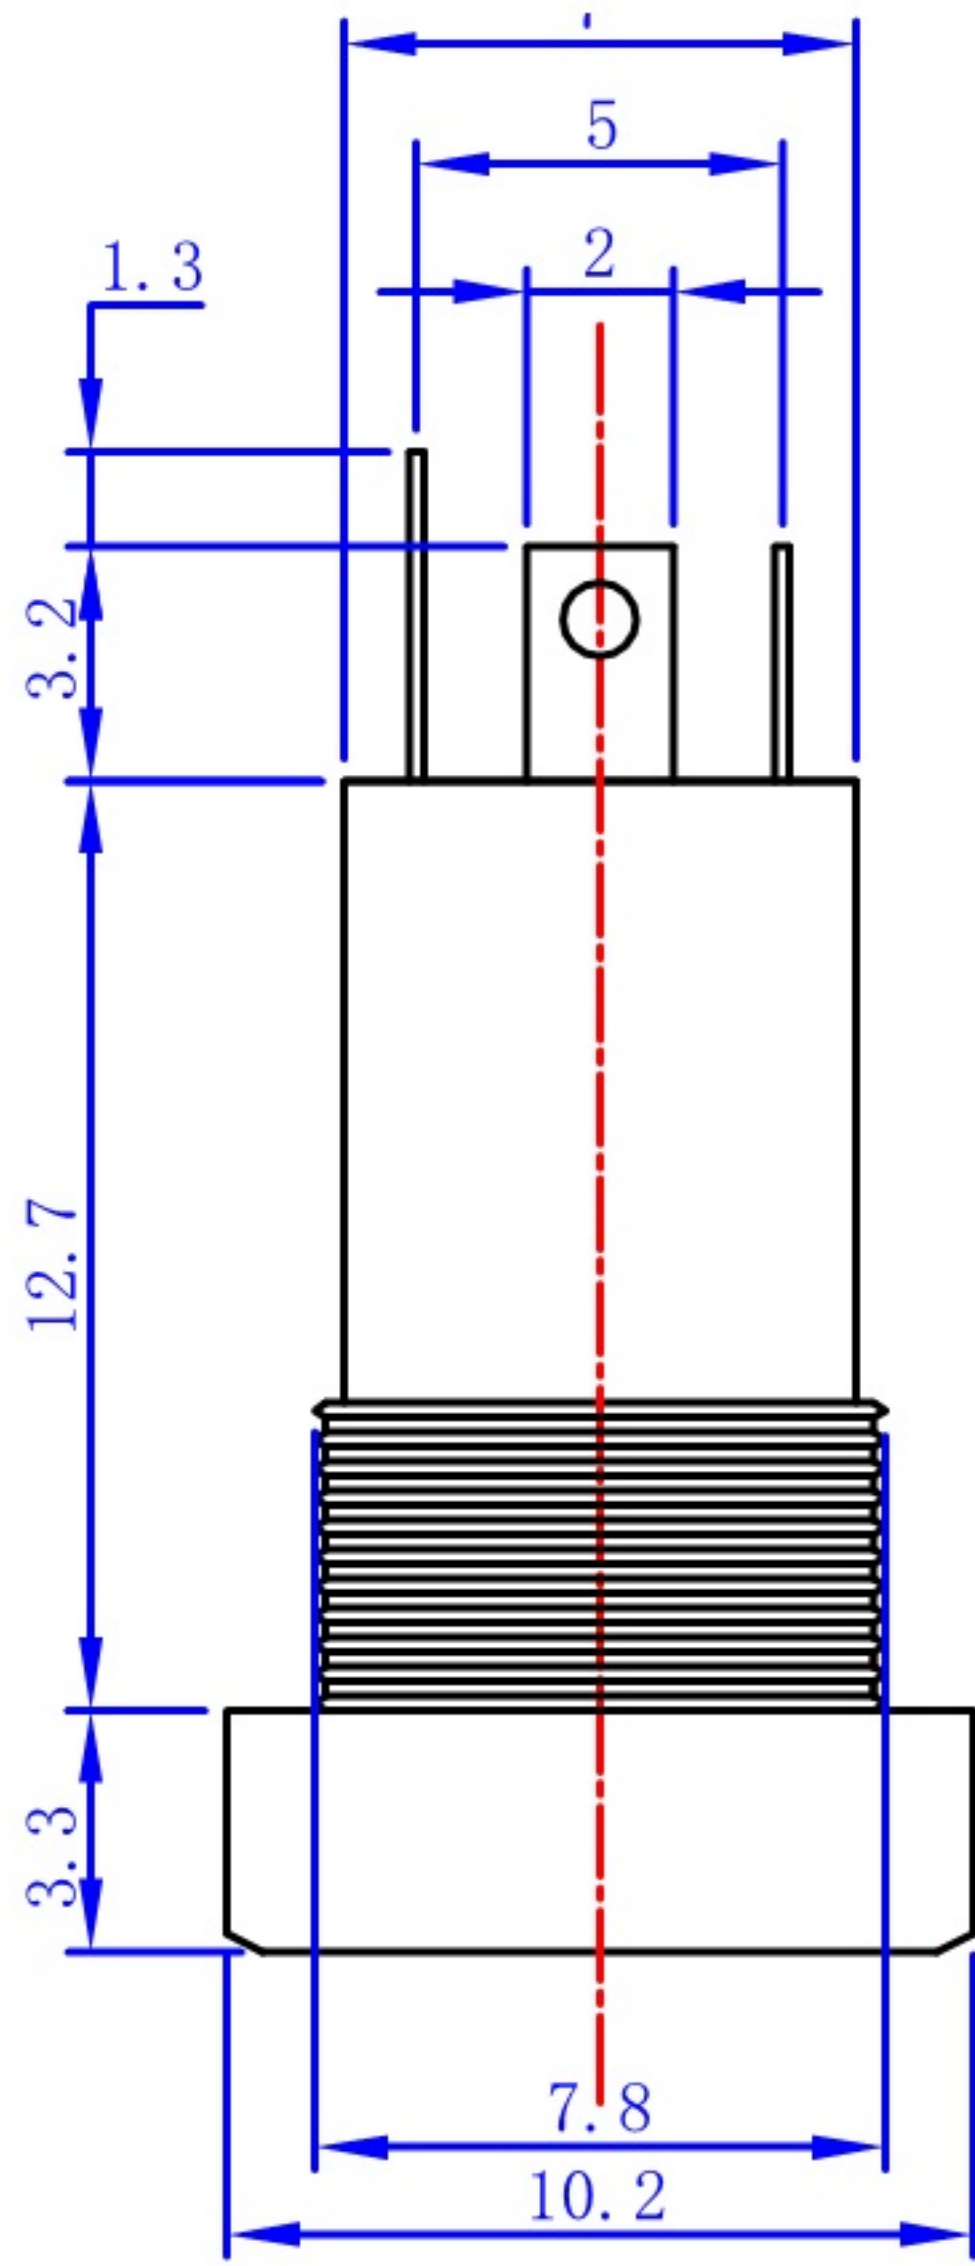


REV.	ECN. NO.	DESCRIPTION	ENG	DATE
A		INITIAL	Kai	2018.05.11
B		UPDATE VERSION	JEFF	2022.06.11





技术要求

- 1、插入力: 2.94~29.4N(0.3~3.0kgf)
2、拔出力: 2.94~29.4N(0.3~3.0kgf)
3、接触电阻: $\leq 50m\Omega$
4、绝缘电阻: $>100M\Omega$ DC 500V
5、耐电压: AC 500V 1min无飞弧及击穿
6、寿命: 5000 10~20次/min
7、额定负载: DC 12V 1A
8、适用温度范围: $-25\sim 85^{\circ}C$
9、推荐使用插头:

螺帽

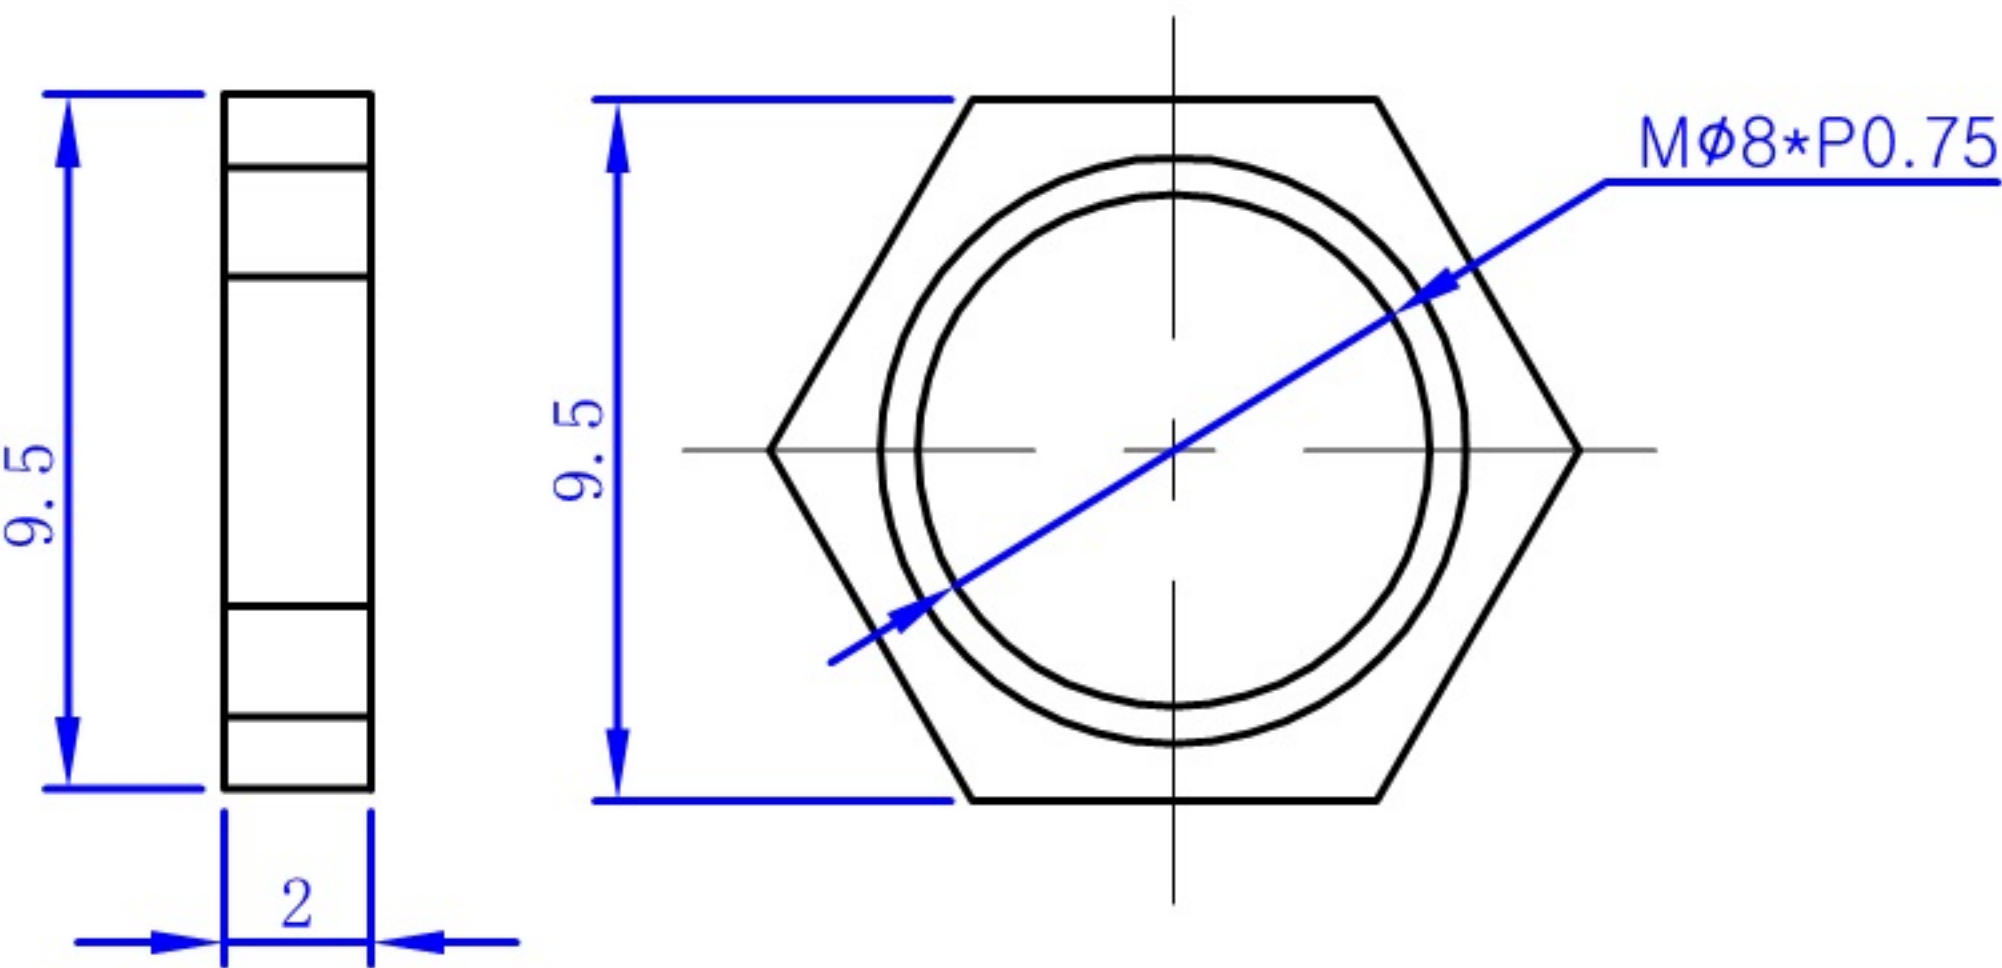

P. C. B. LAYOUT TOP VIEW

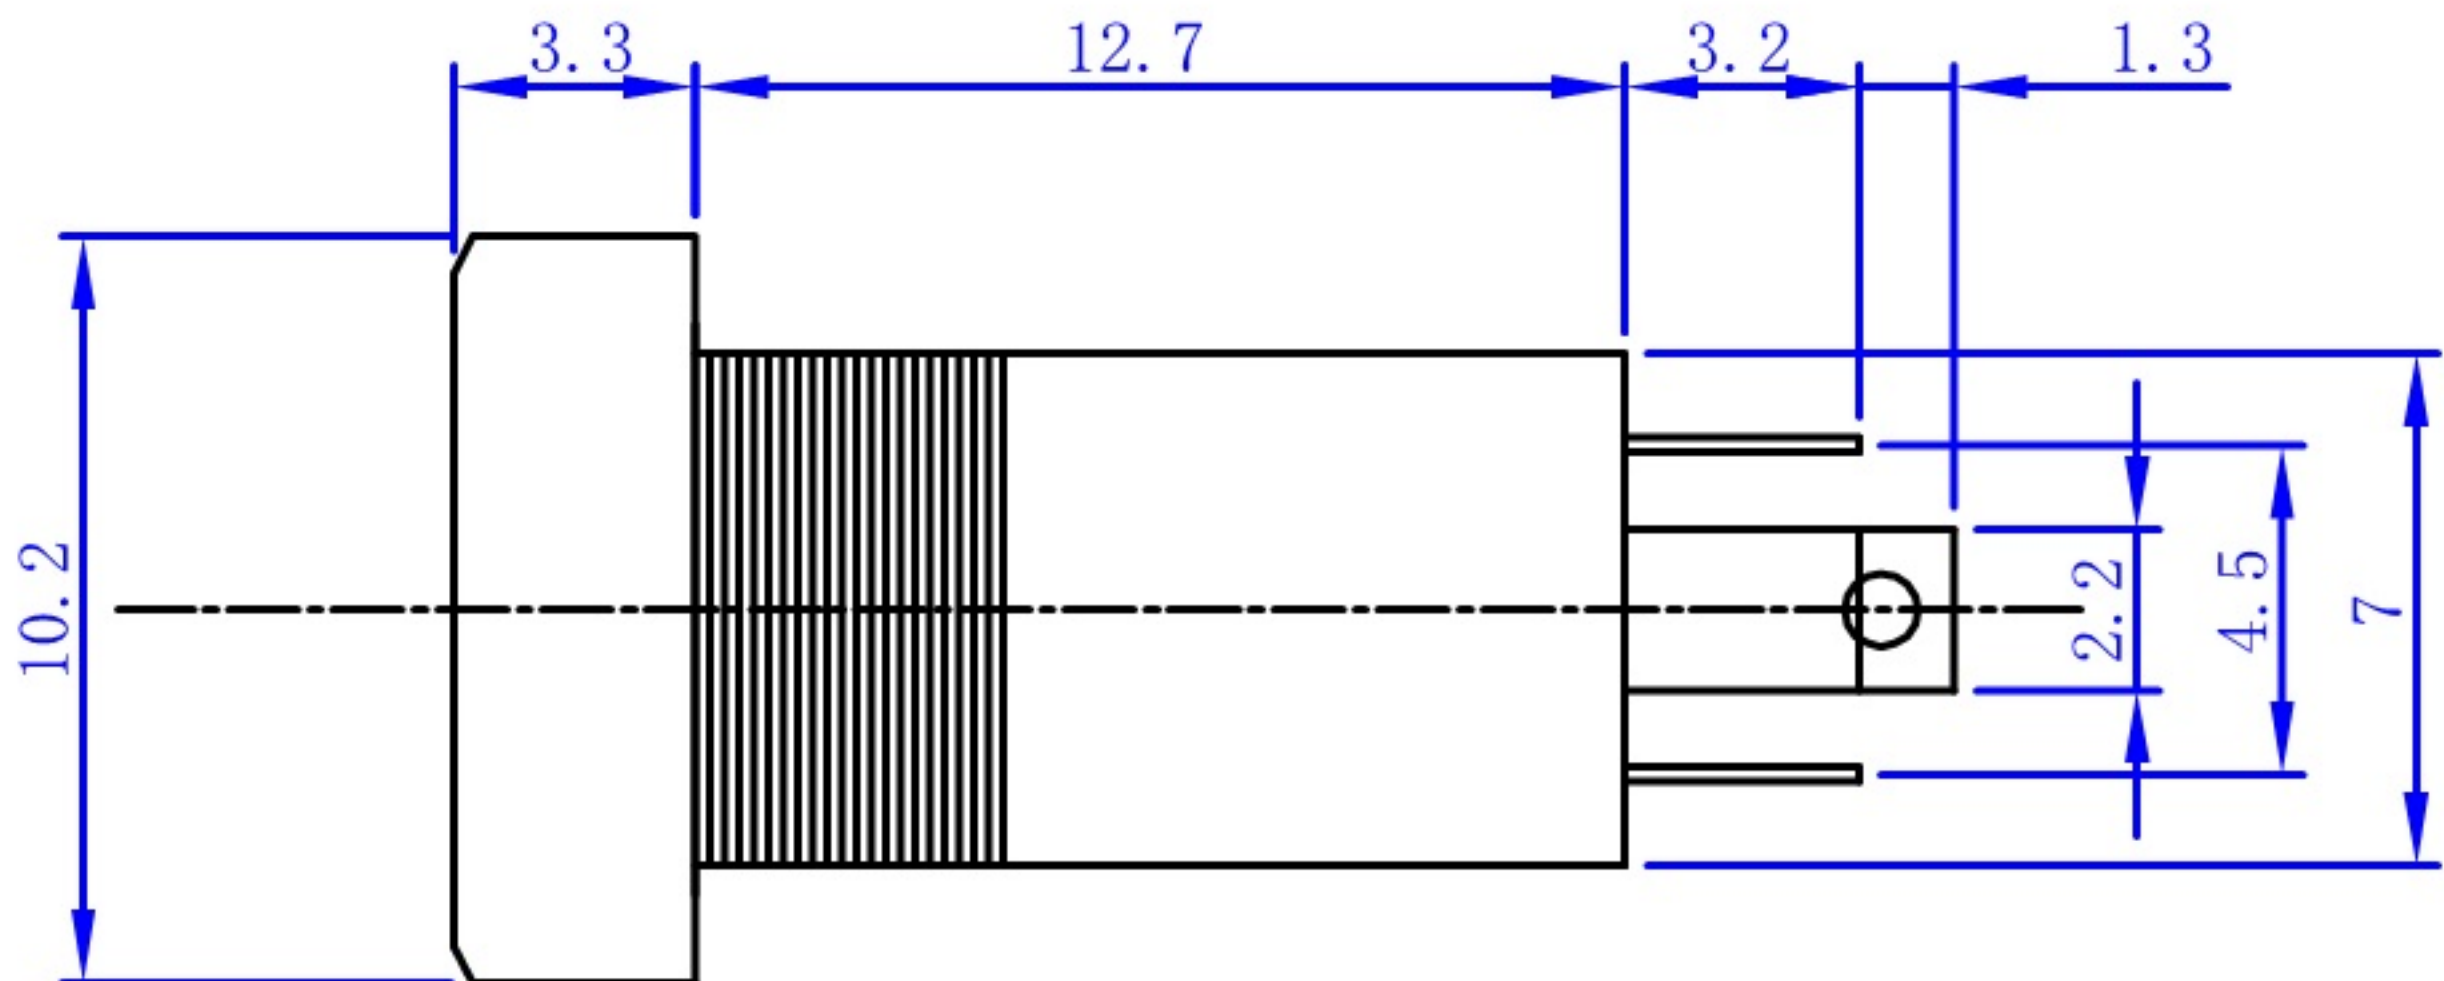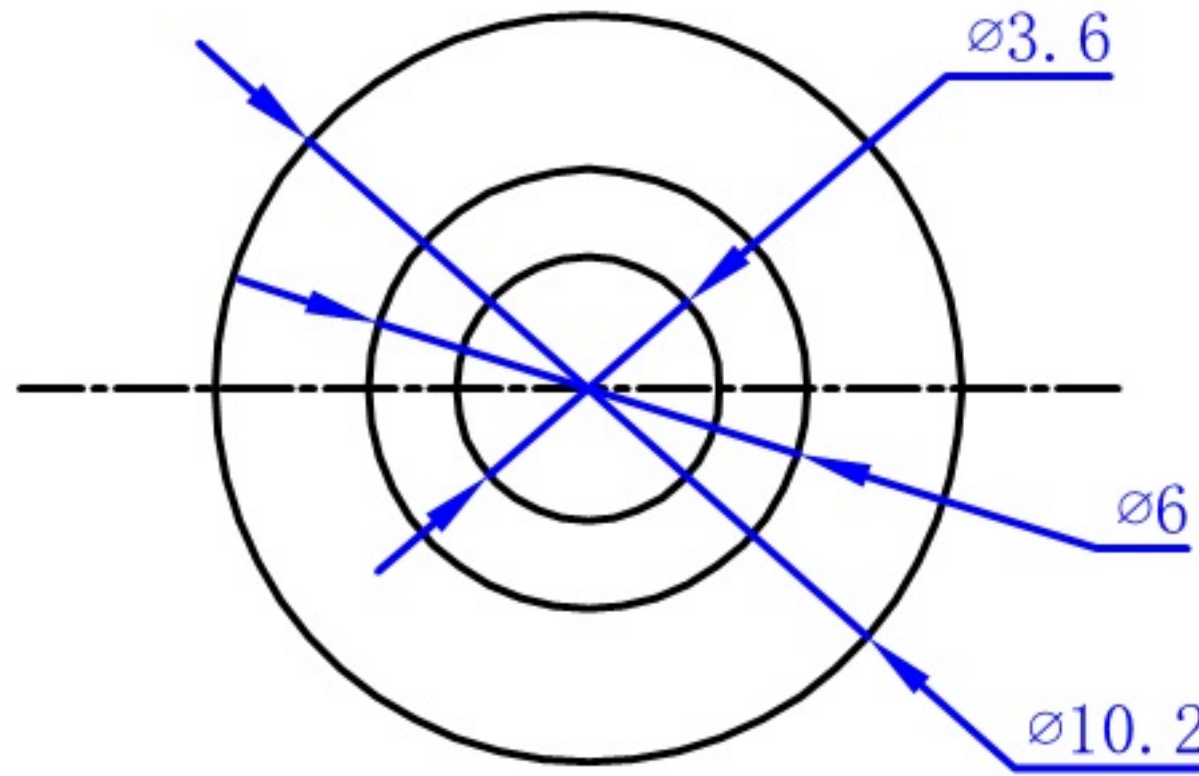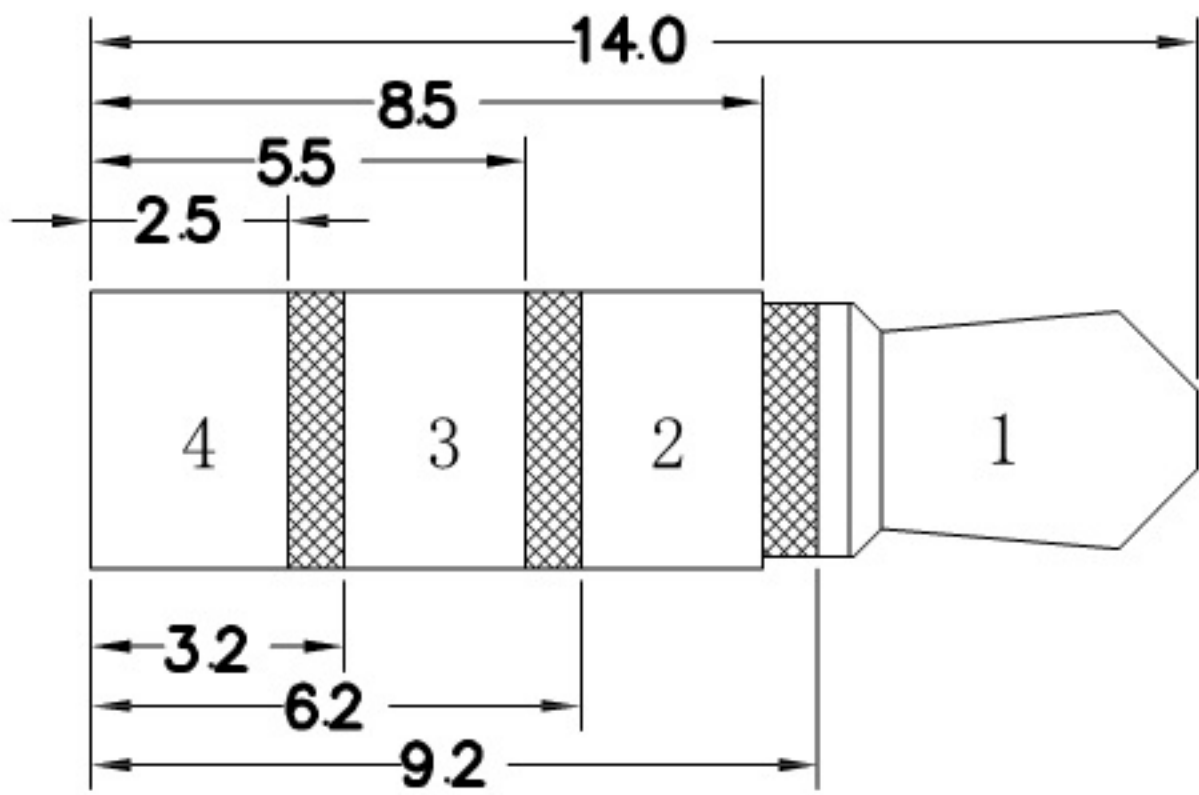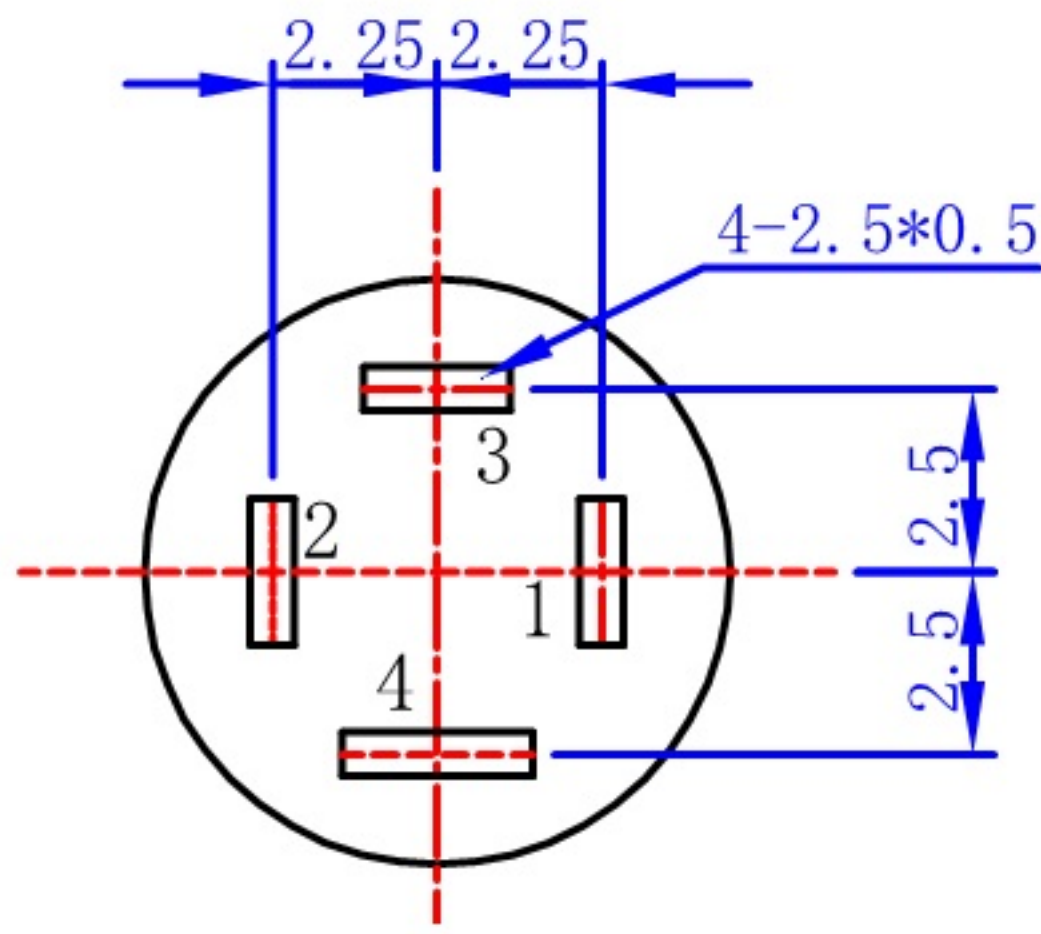

Schematic	PJ-392A	PJ-392A-1	PJ-392A-2	PJ-392A-3

MEASURE POINT:
QUADRANT POINT (QP)
TANGENCY POINT (TP)
INTERSECTION POINT (IP)

UNLESS OTHERWISE SPECIFIED, TOLERANCE:
X. ± 0.50
X.x ± 0.30
X.xx ± 0.20
X.xxx ± 0.10
ANGULAR $\pm 3^{\circ}$

XGB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DESIGN:	DATE:	TITLE:		
CHECKED:	DATE:	DC POWER JACK CONNECTOR		
APPROVED:	DATE:			
PART NO. XB-DCJR0021-F02G1BR-B	REV.: B	SCALE: 1:1	UNIT: mm	
DRAWING NO.	SIZE: A4	SHEET: 1/1		

ITEM	NAME	Q'TY	DESCRIPTION	NOTE
3	CENTER PIN	1	BRASS;THE BOTTOM OF THE NICKEL; THE WHOLE GOLD PLATING.	
2	SHELL	1	PHOSPHOR BRONZE; THE BOTTOM OF THE NICKEL; THE WHOLE GOLD PLATING.	T=0.2
1	HOUSING	1	HIGH TEMPERATURE;COLOR BLACK	