

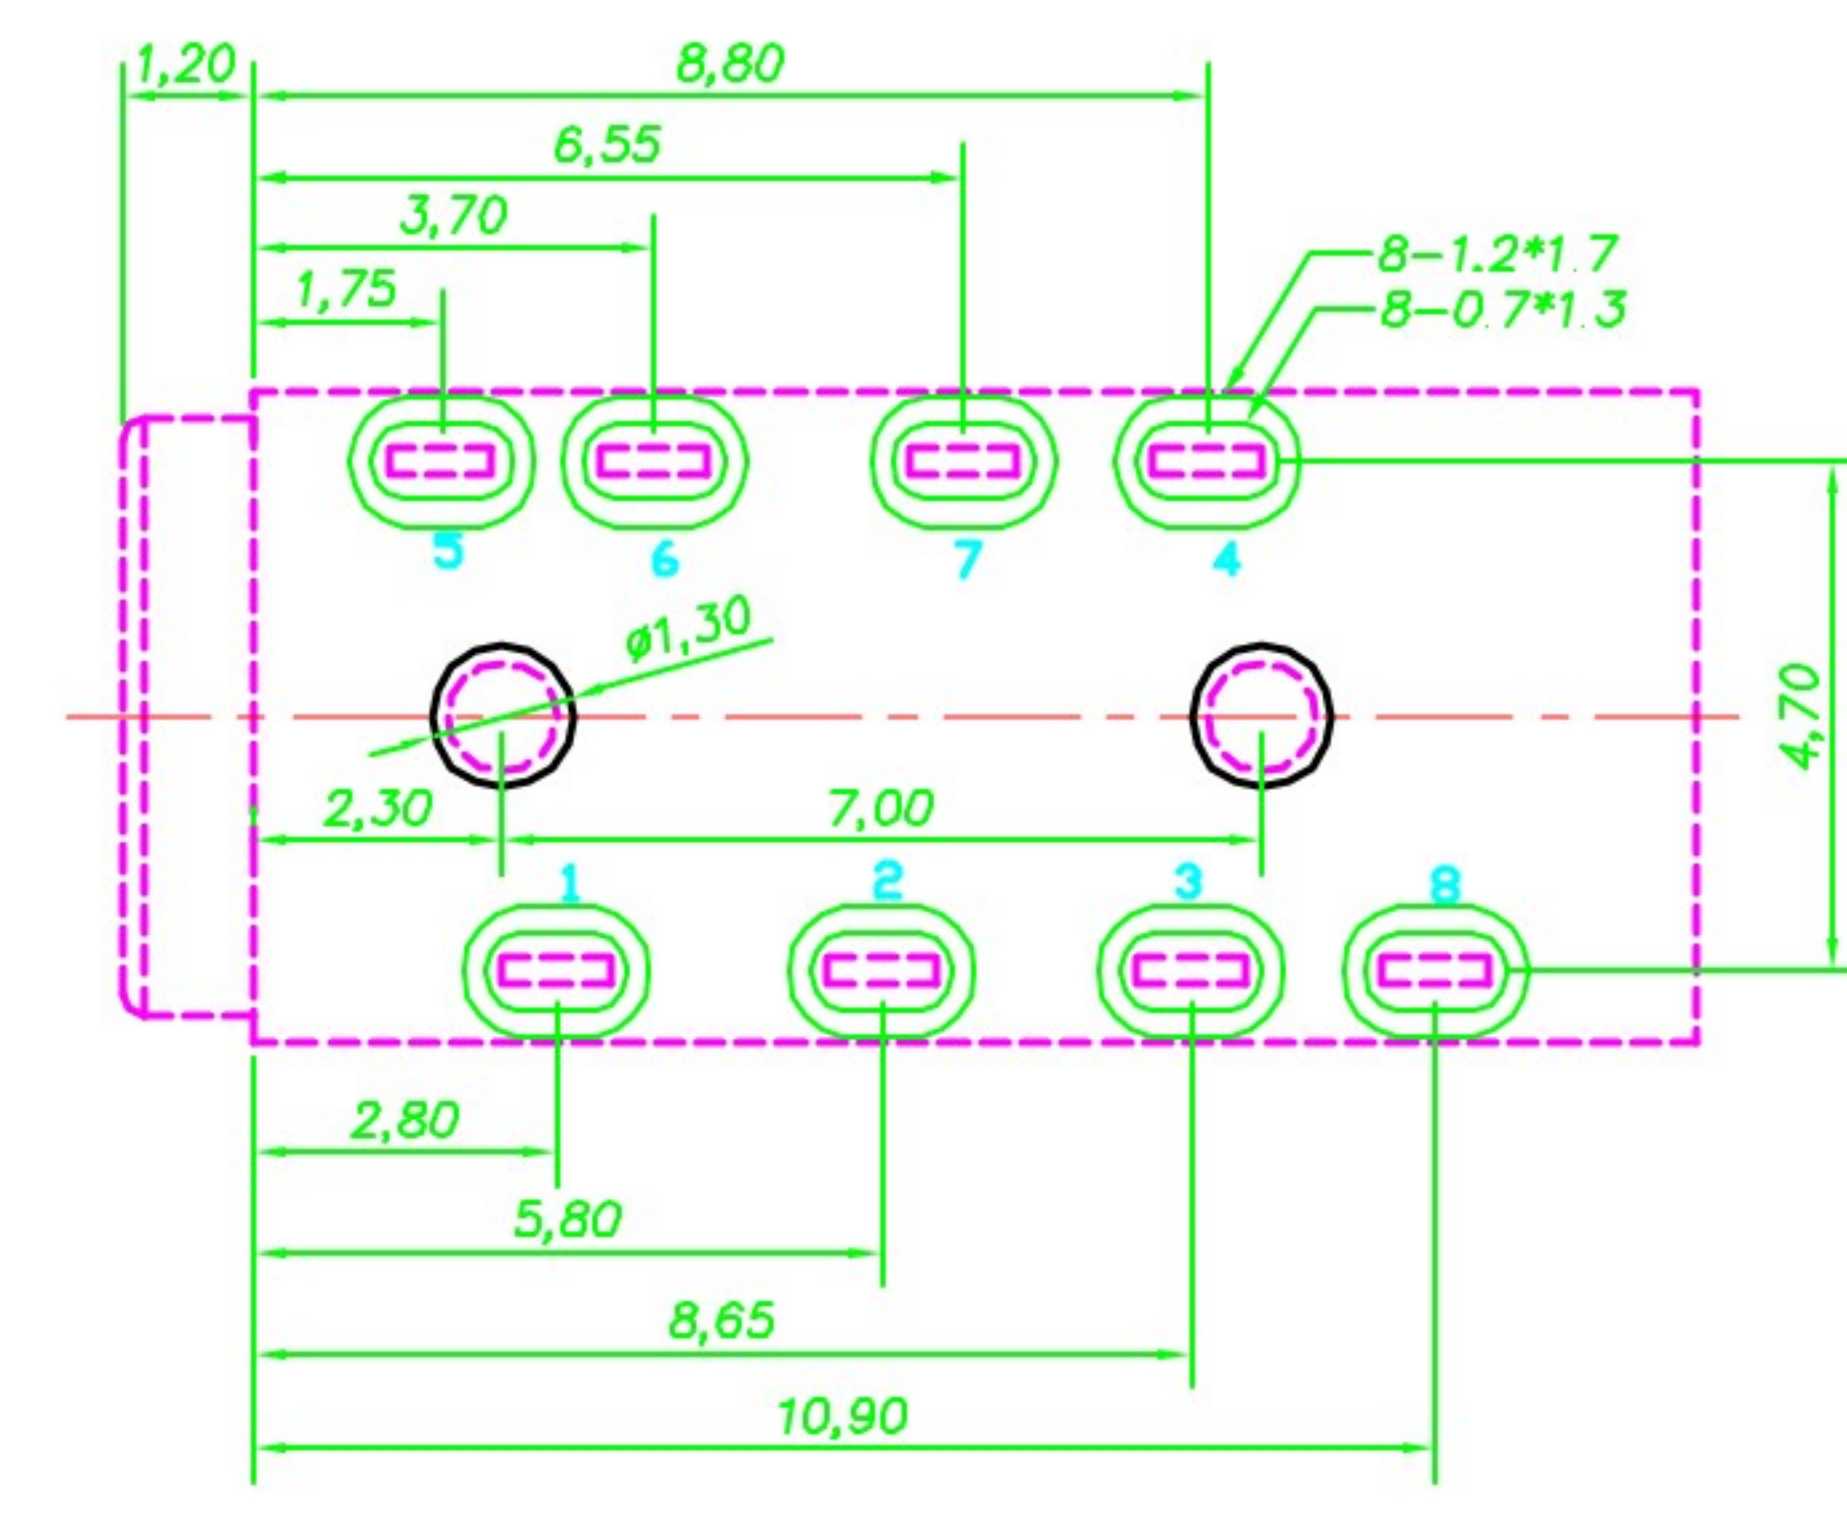
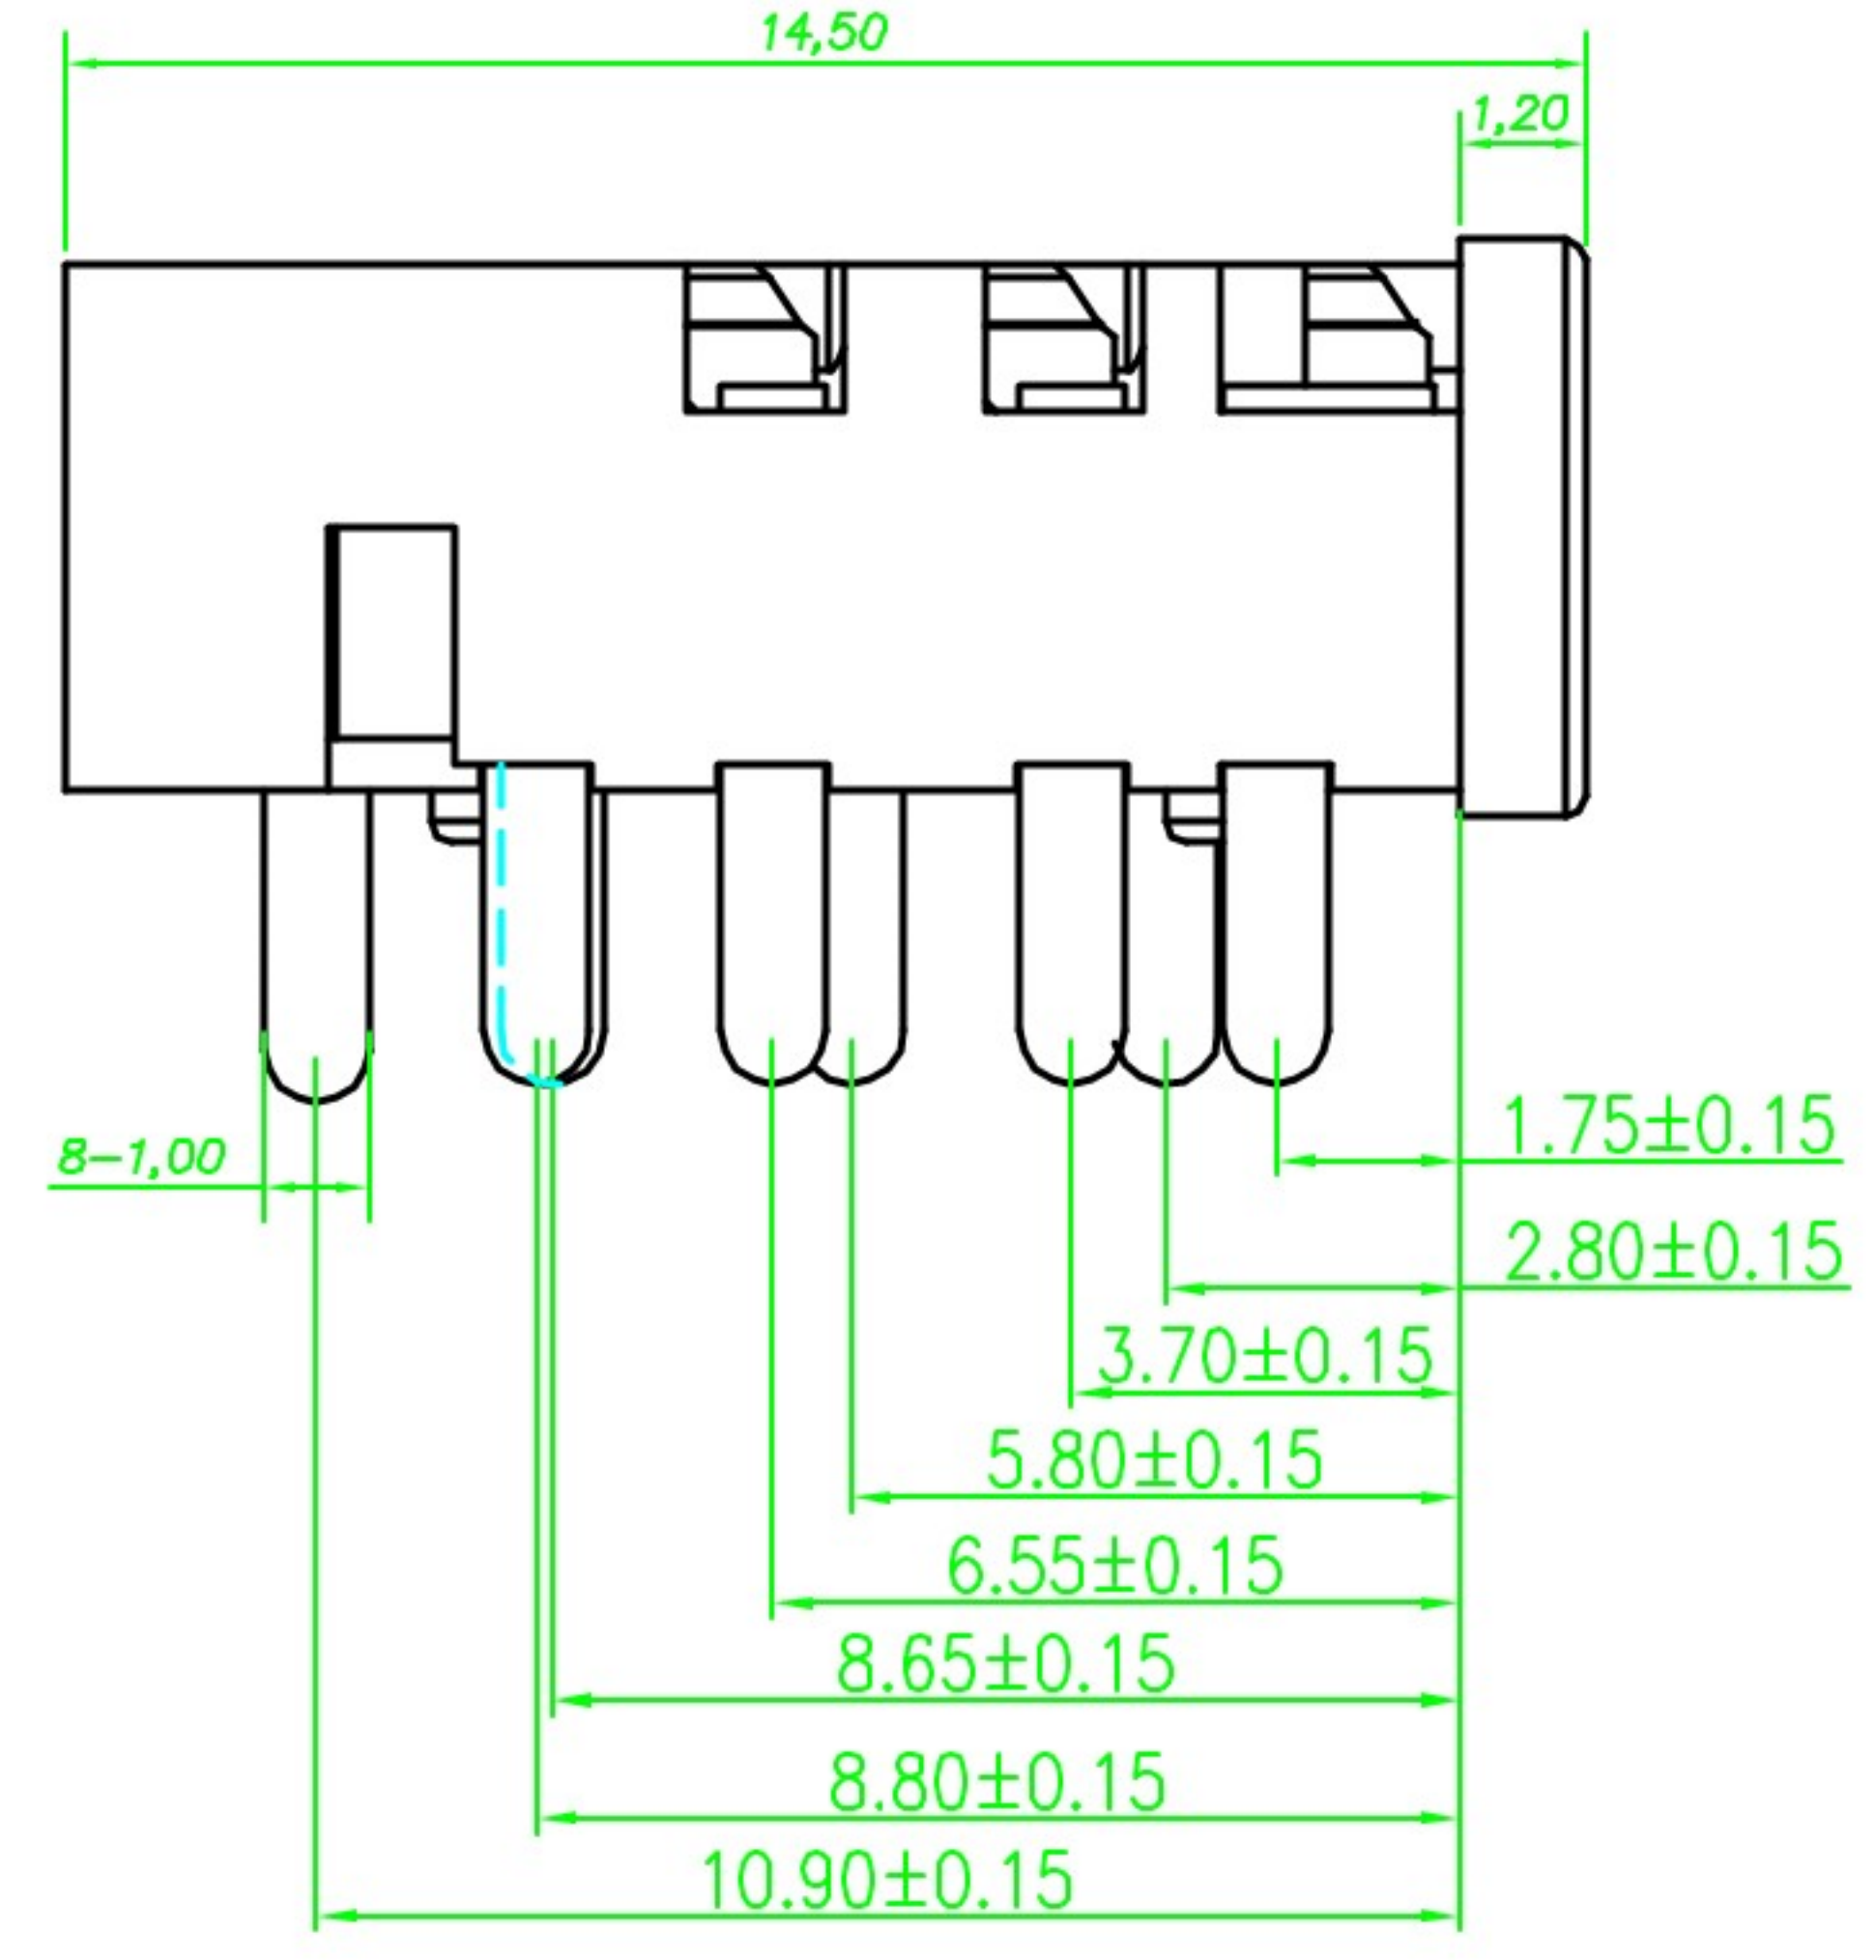
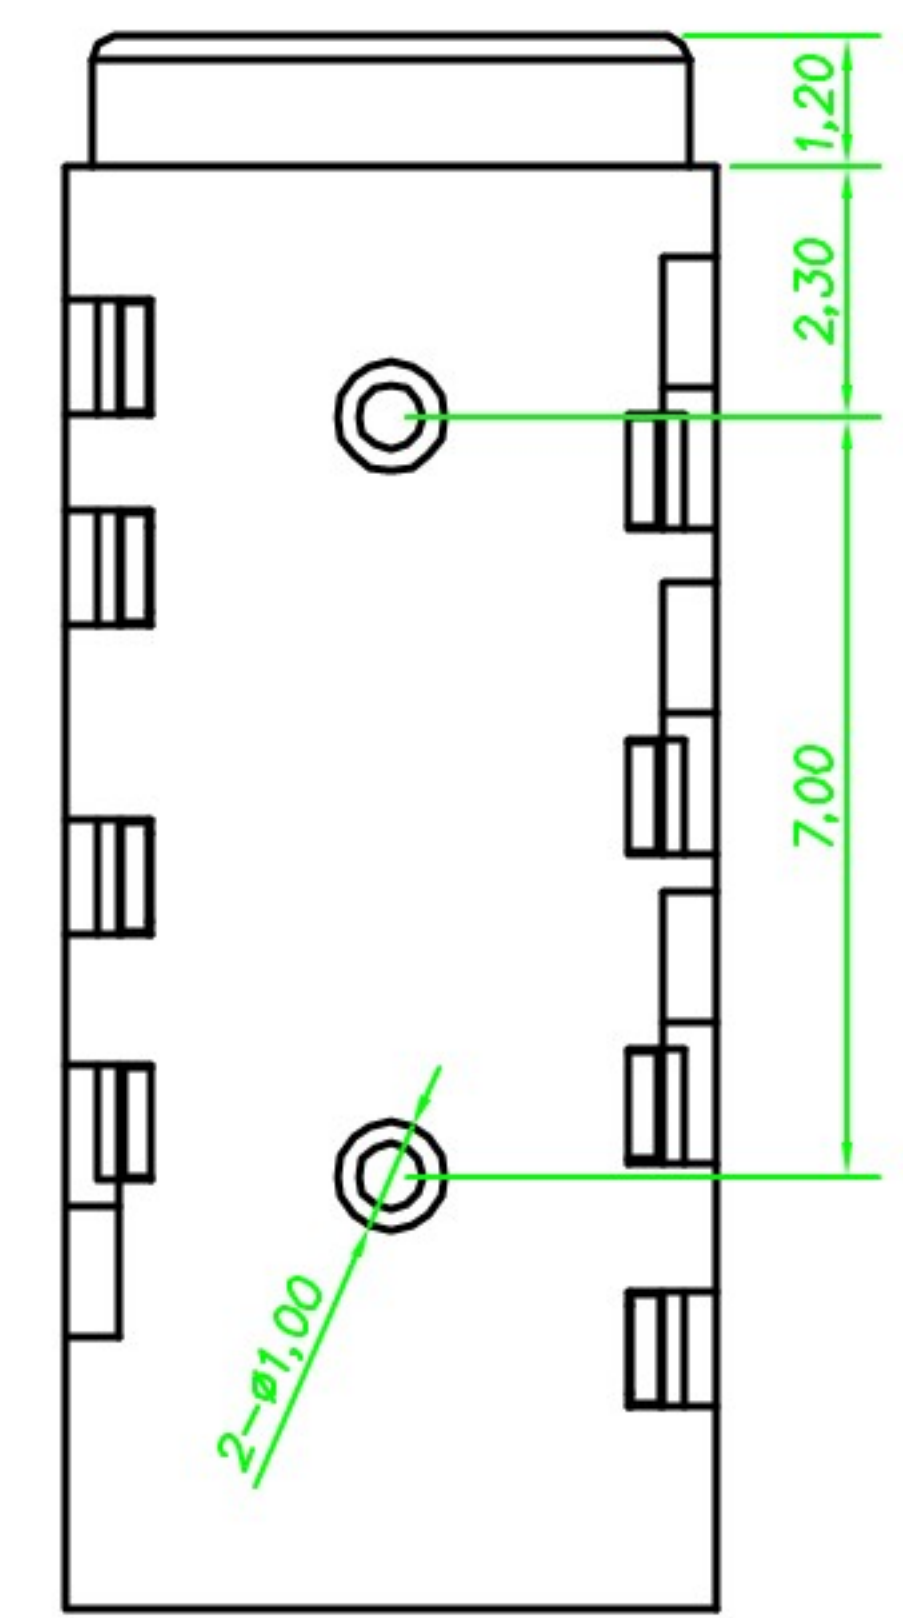
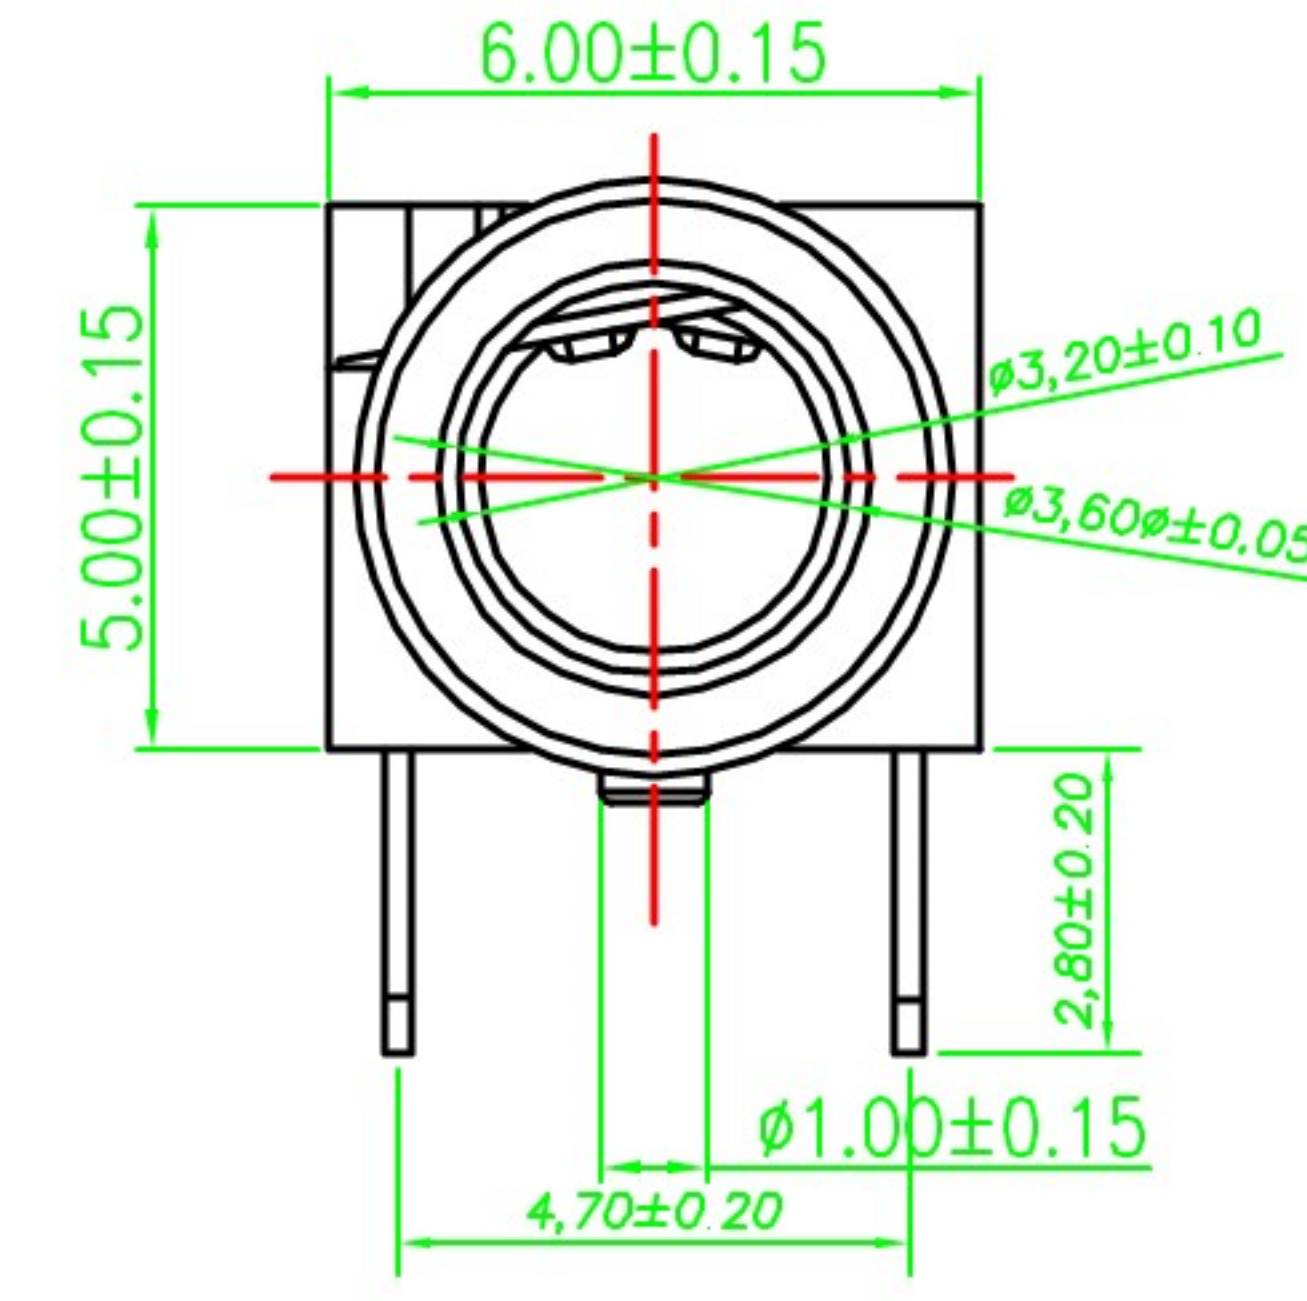


REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A		INITIAL	Kai	2018.06.14

镀银图

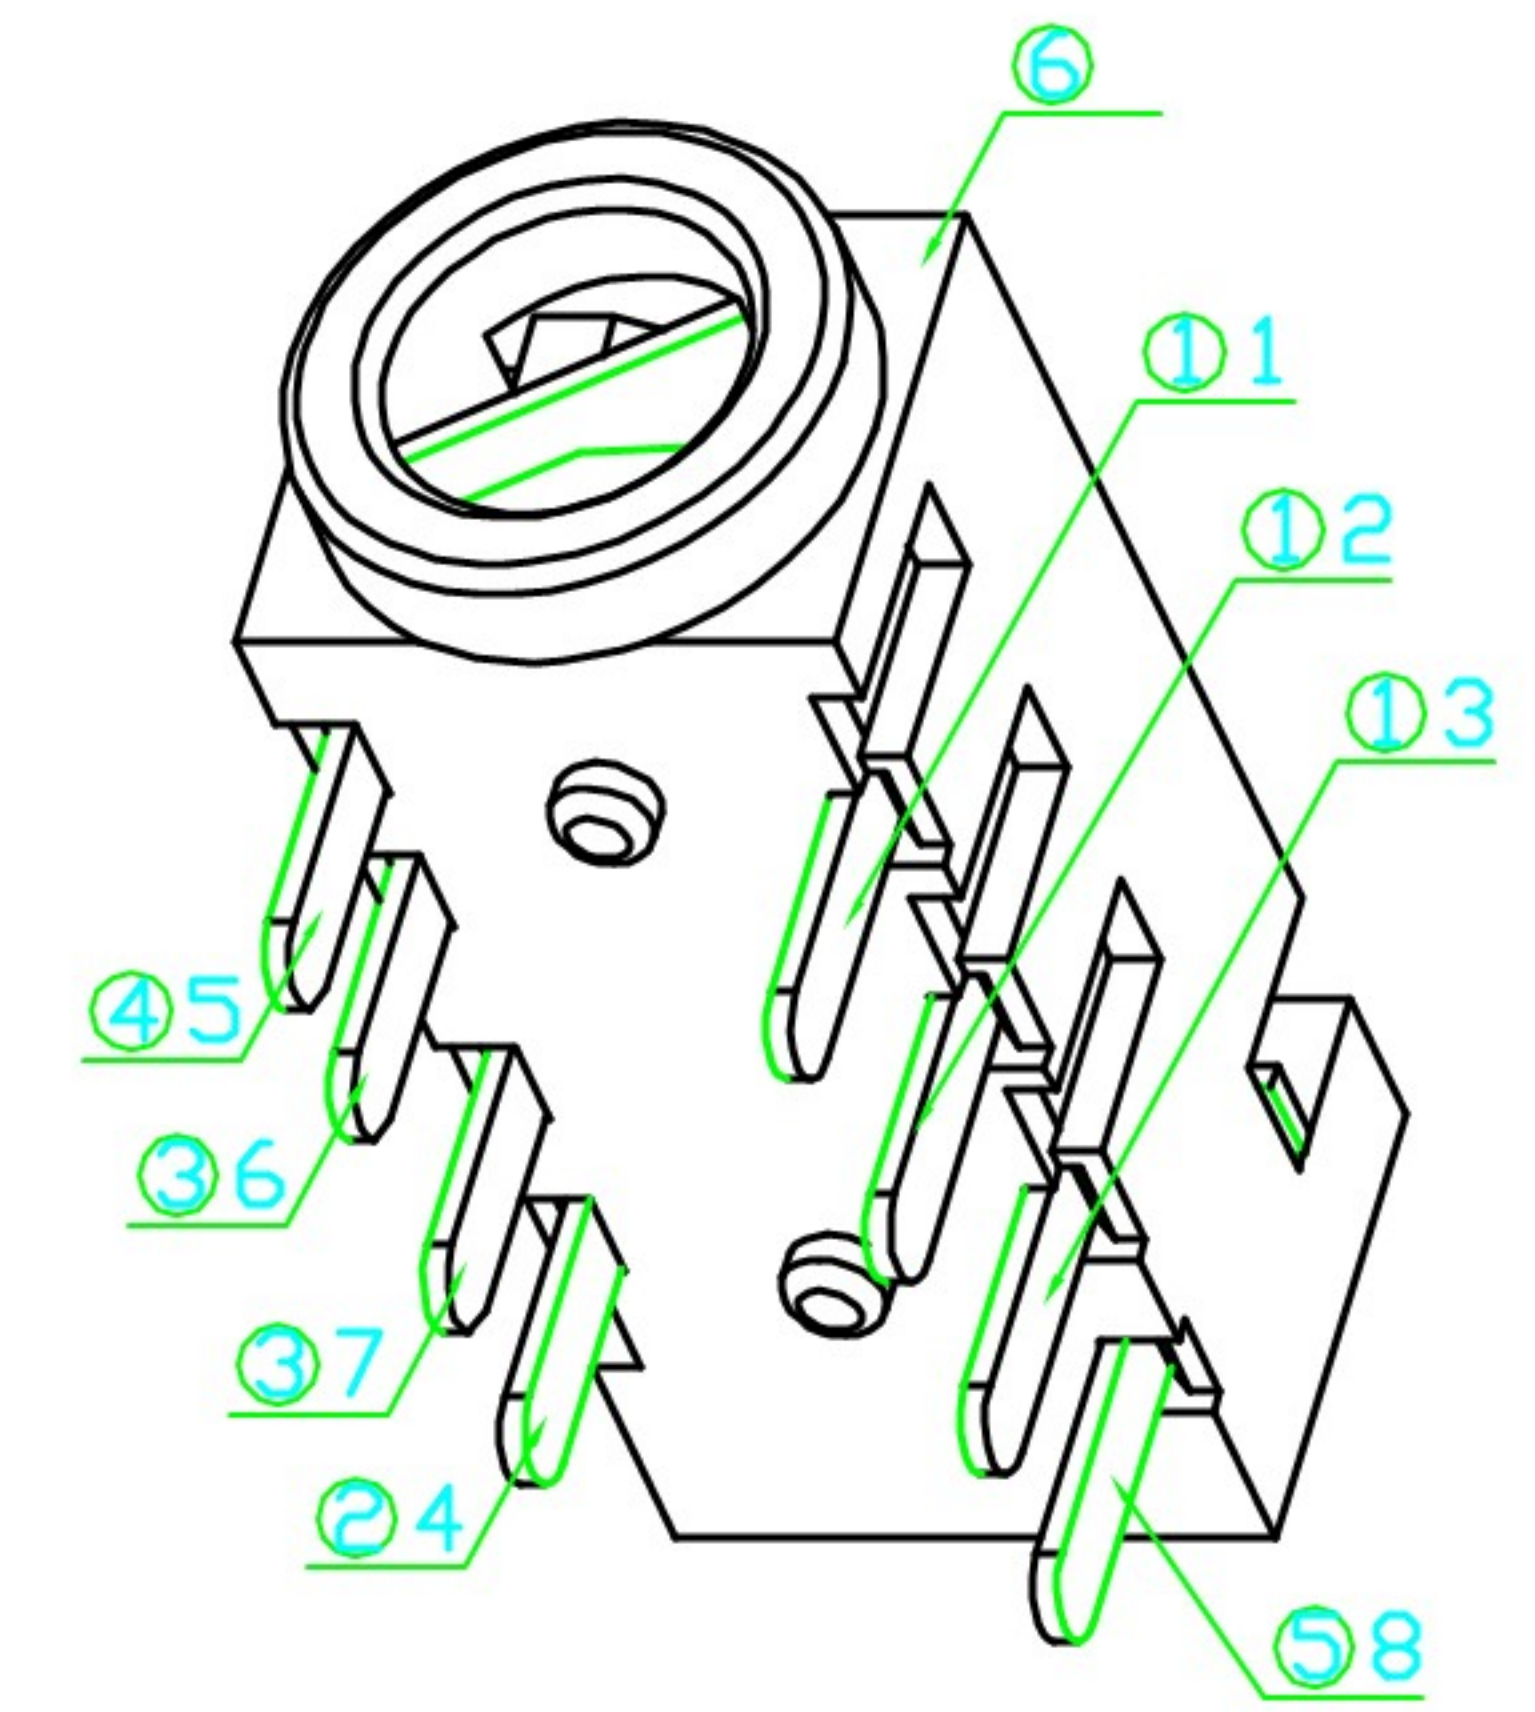

PCB LAYOUT TOP VIEW

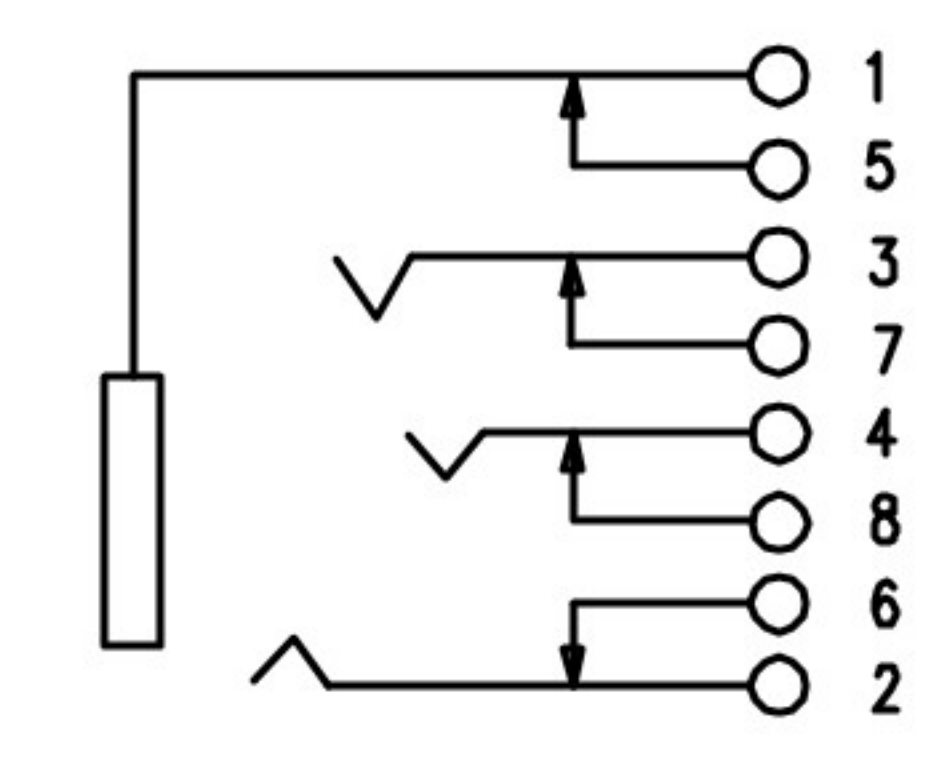

CIRCUIT DIAGRAM

							UNLESS OTHERWISE SPECIFIED TOLERANCES		XB Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.						
							DECIMALS:		ANGLES:		DWG NO. Q/XM-CP-RD-XXXX		PART NAME: PHONE JACK		
							DIM	TOL	DIM	TOL	DESIGN:	Kai	PART NO. XB-PJ-393-8P-X-X		
							X.	±0.35	X.	±2°	CHECK:	Lucky	REV.	UNIT:	SHEET:
							X.X	±0.30	X.X	±1°		2018.06.14	A	mm	1/1
							X.XX	±0.20	X.XX	—	APPROVED	Lucky			
							X.XXX	±0.10	X.XXX	—		2018.06.14			
							PART NAME:		PART NO.						
							PART NO.		XB-PJ-393-8P-X-X						
							REV.	UNIT:	SHEET:						
							A	mm	1/1						

4	盖脚	1	磷铜	0.25T	镀银	
3	弹片脚	1	镀青铜	0.2T	镀银	
2	中脚	3	磷铜	0.2T	镀银	
1	底座	1	PPA		黑色	
序号	产品编号	产品名称	数量	材料	规格	电镀

主要技术性能	
额定电负荷	DC 30V/0.5A
接触电阻	≤0.03Ω
绝缘电阻	≥100MΩ
耐 压	AC500V(50Hz)/min
插拔力	3-20N
使用温度范围	-30~70℃
使用寿命	5000次