


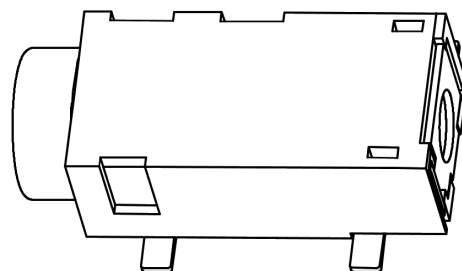

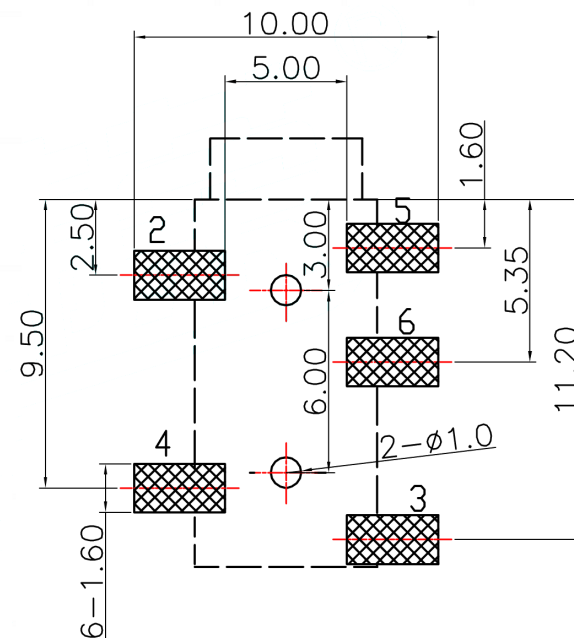
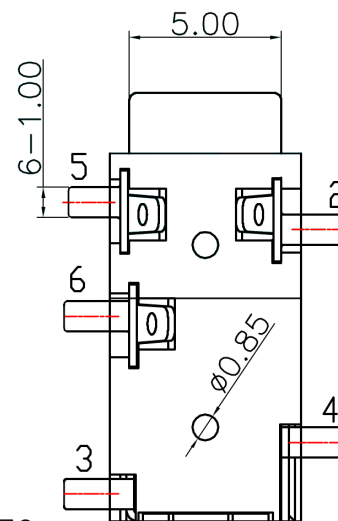
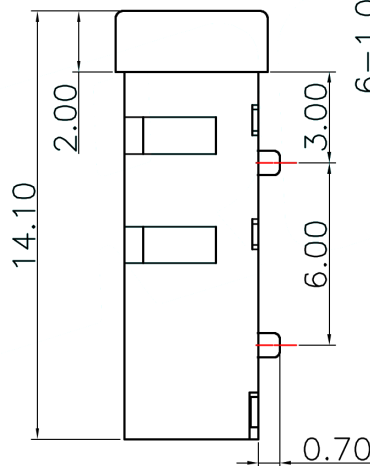


CAD FILE:

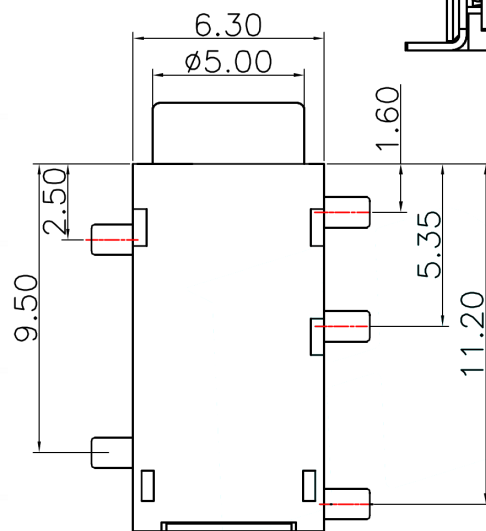

Circuit Diagram



P C B Layout(Top view)

Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:-20℃~70℃
Operating force:3-20N
Operating Life:5,000cycles

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初版	ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Audio Jack			UNIT : mm	DRWG NO.:XB-PJ25A001-F06J1BR-A
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL:			SCALE: 5:1	CHK'D DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	东 莞 市 溪 榜 电 子 有 限 公 司			APPD. ZENQ. CHEN 2012-9-25	
1	KNOB	PPA	1	BLACK	DONG GUAN XI BANG ELECTRONICS CO., LTD.			APPD. ZENQ. CHEN 2012-9-25	
NO.	PARTS	MATERIALS	Q'TY	FINISH	Switch Connector				