

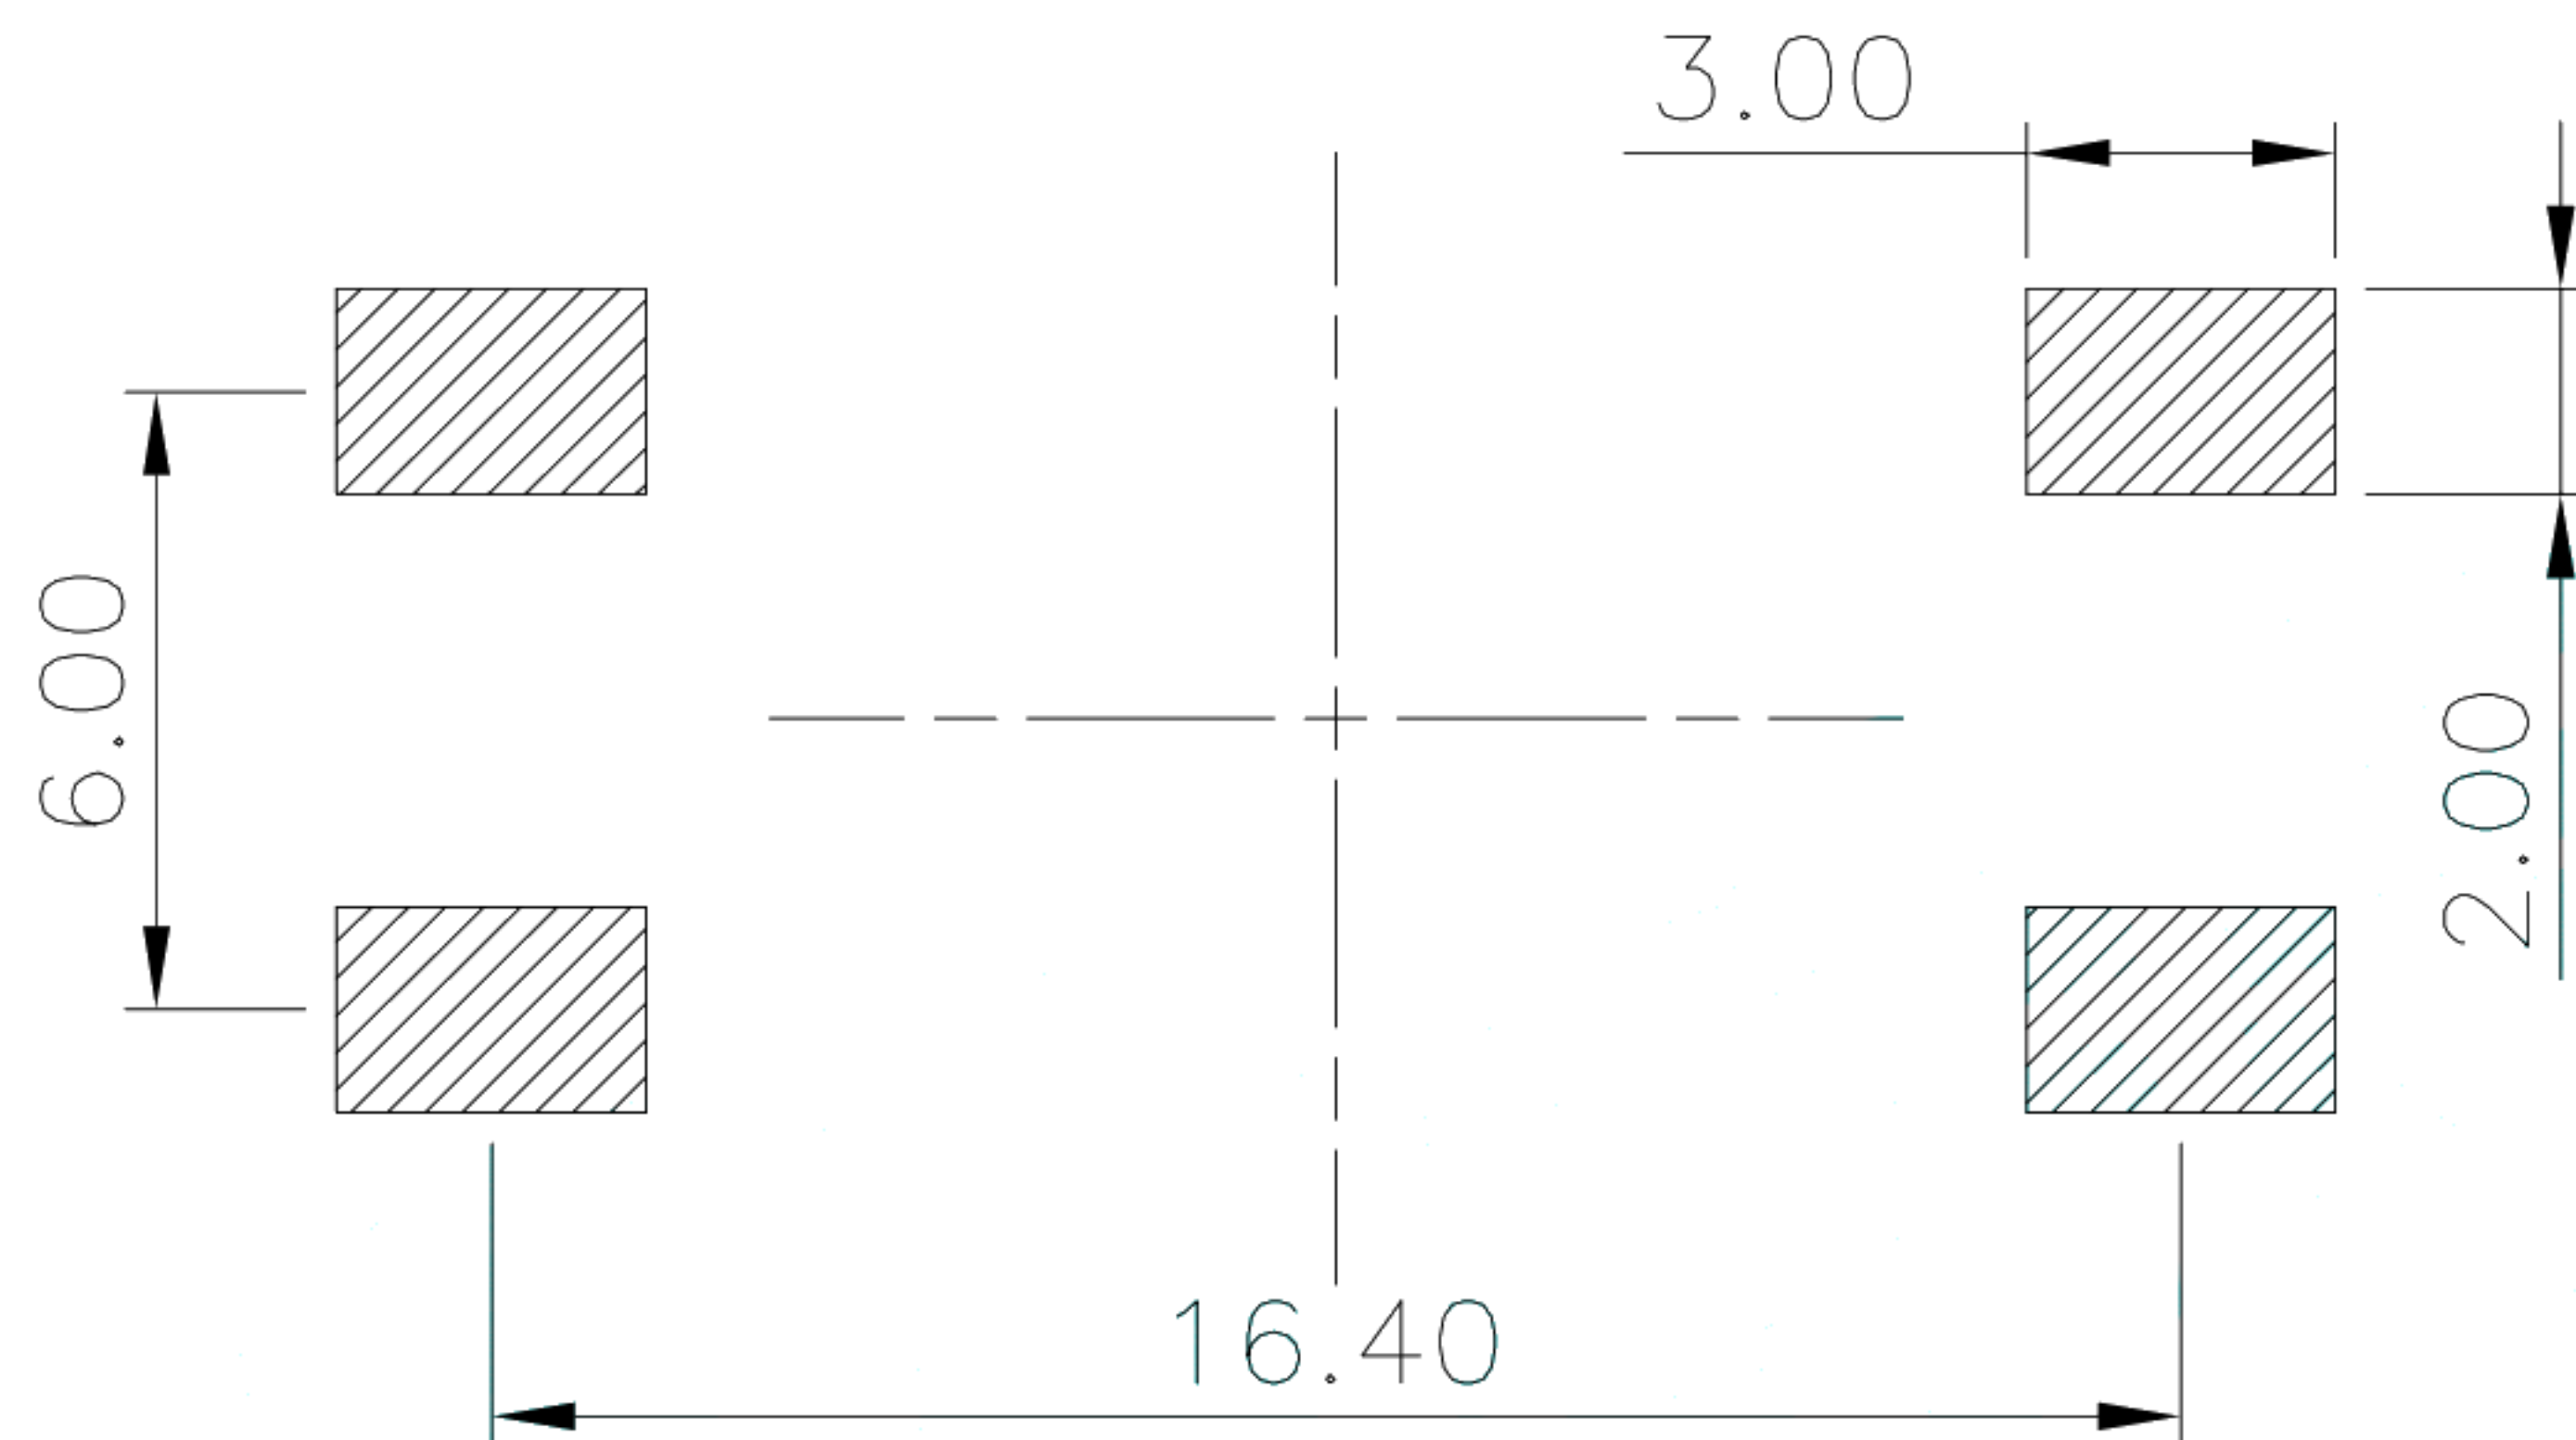
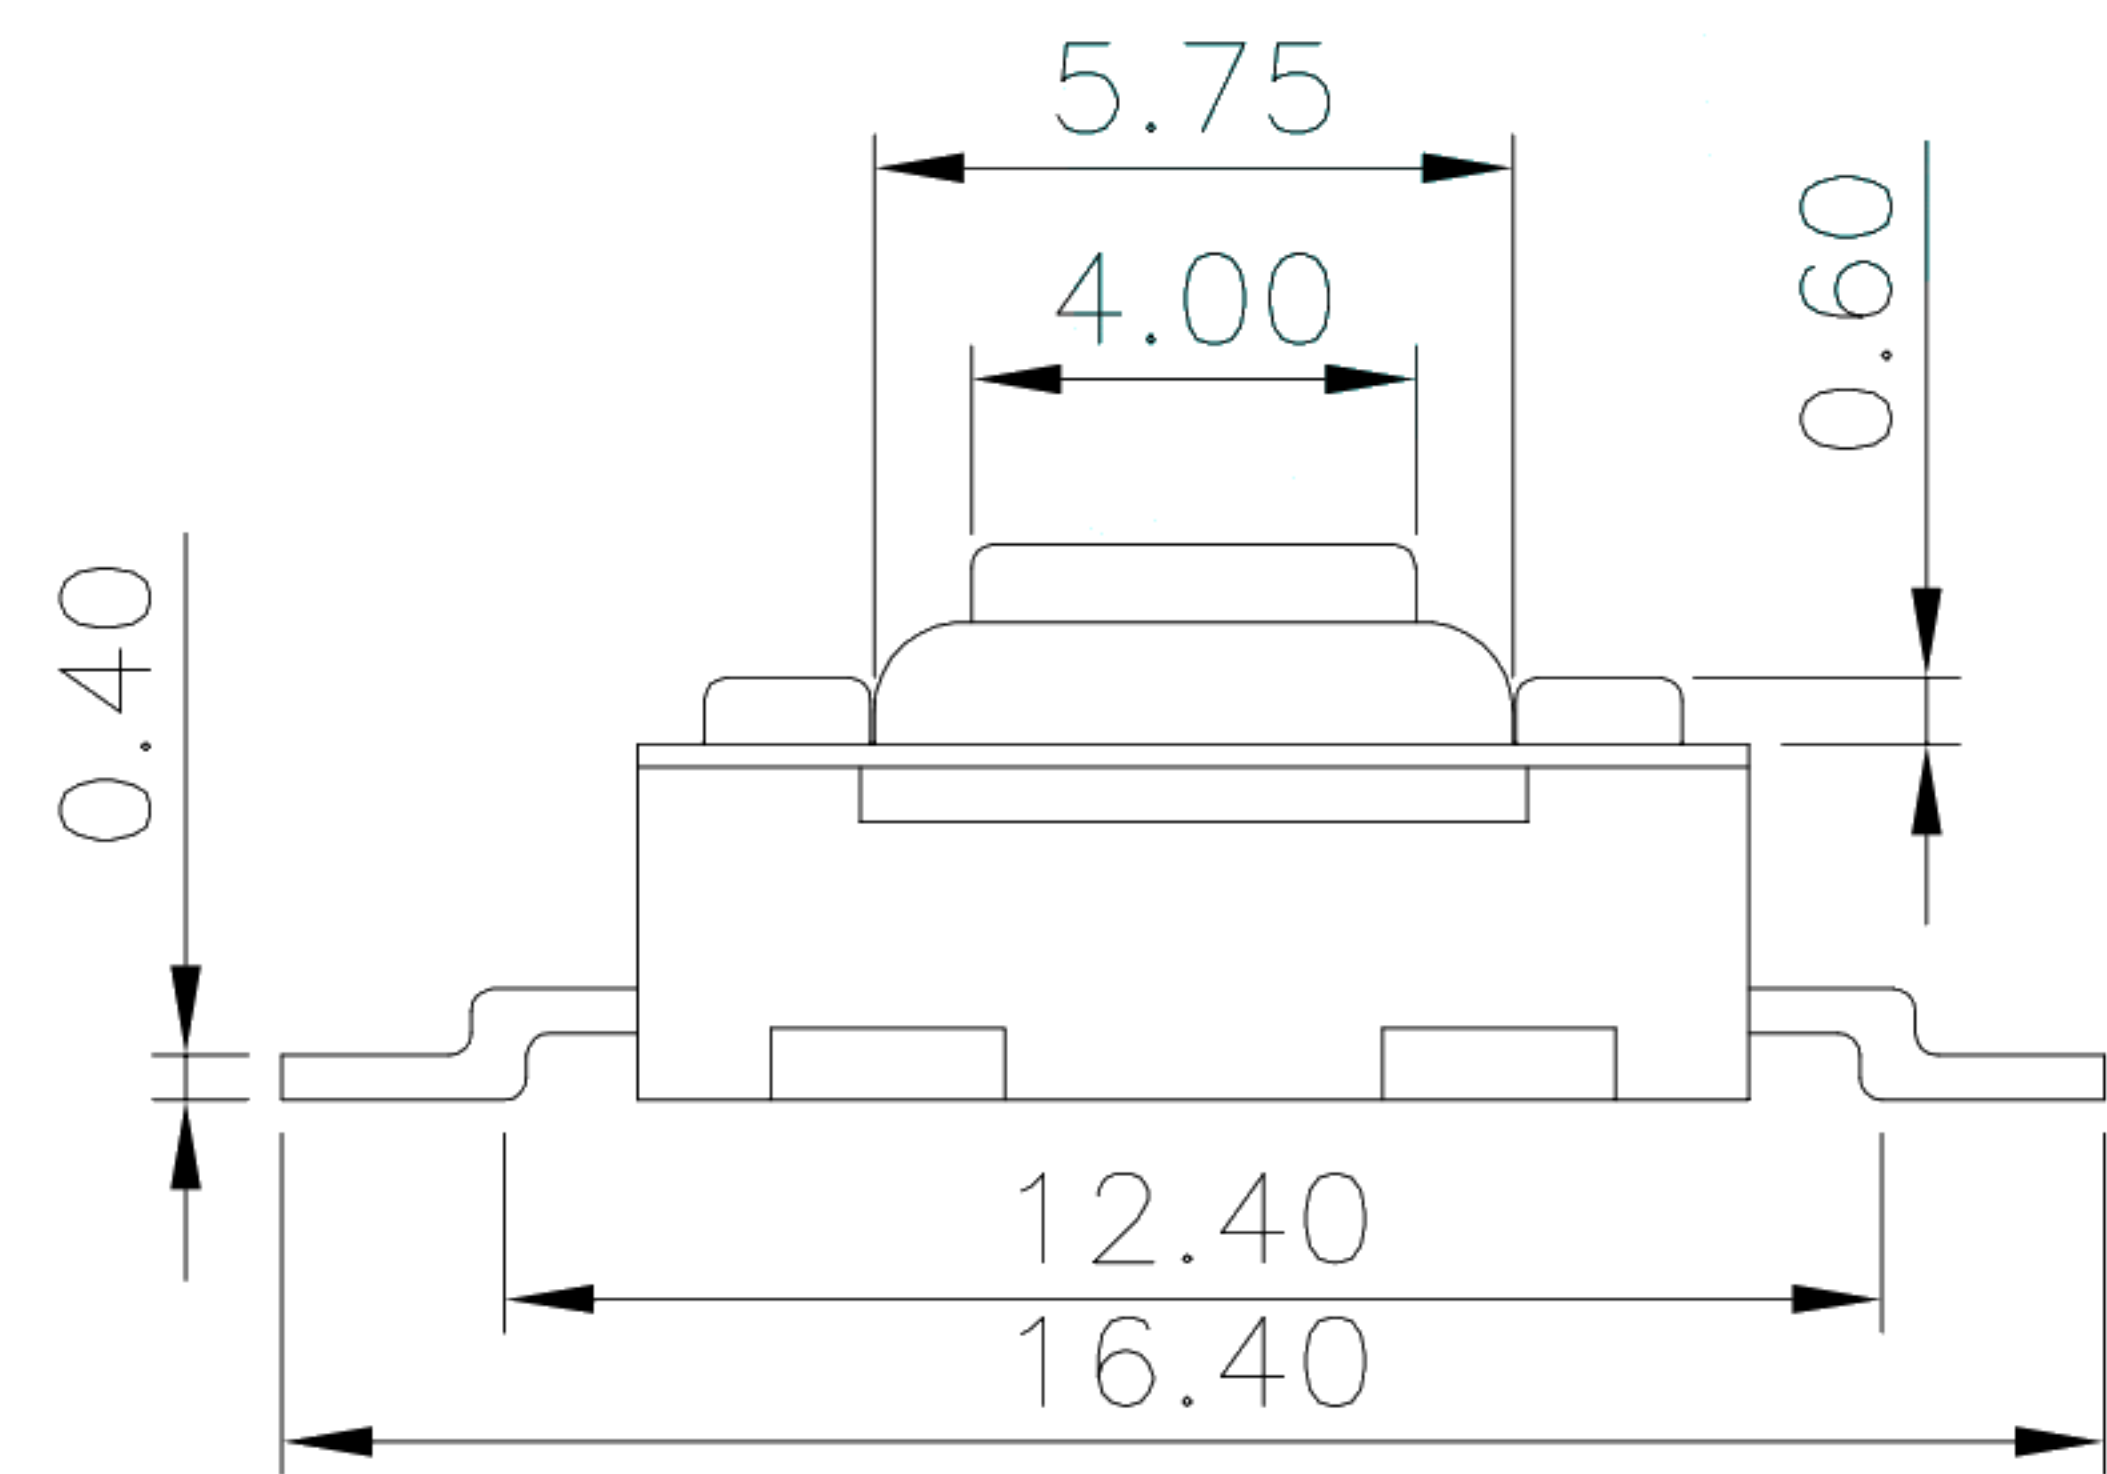
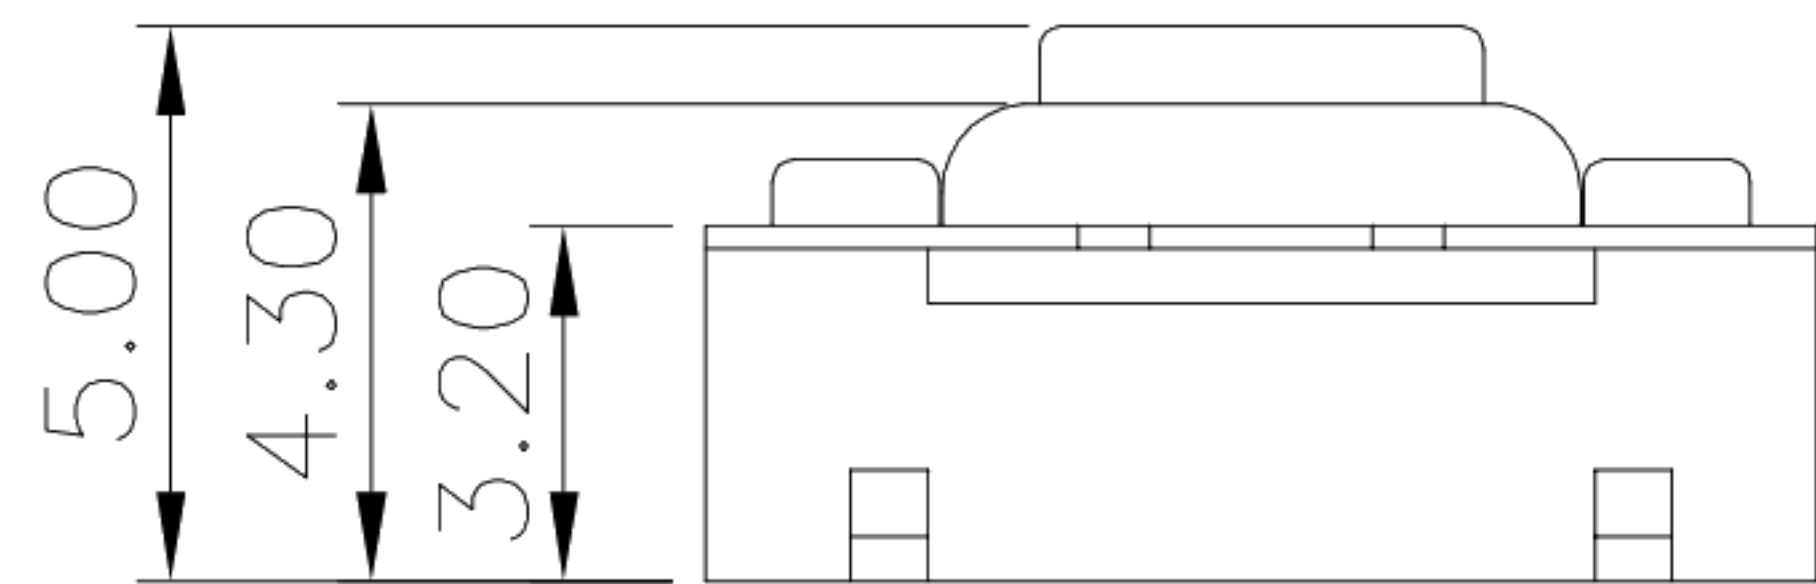


ROHS

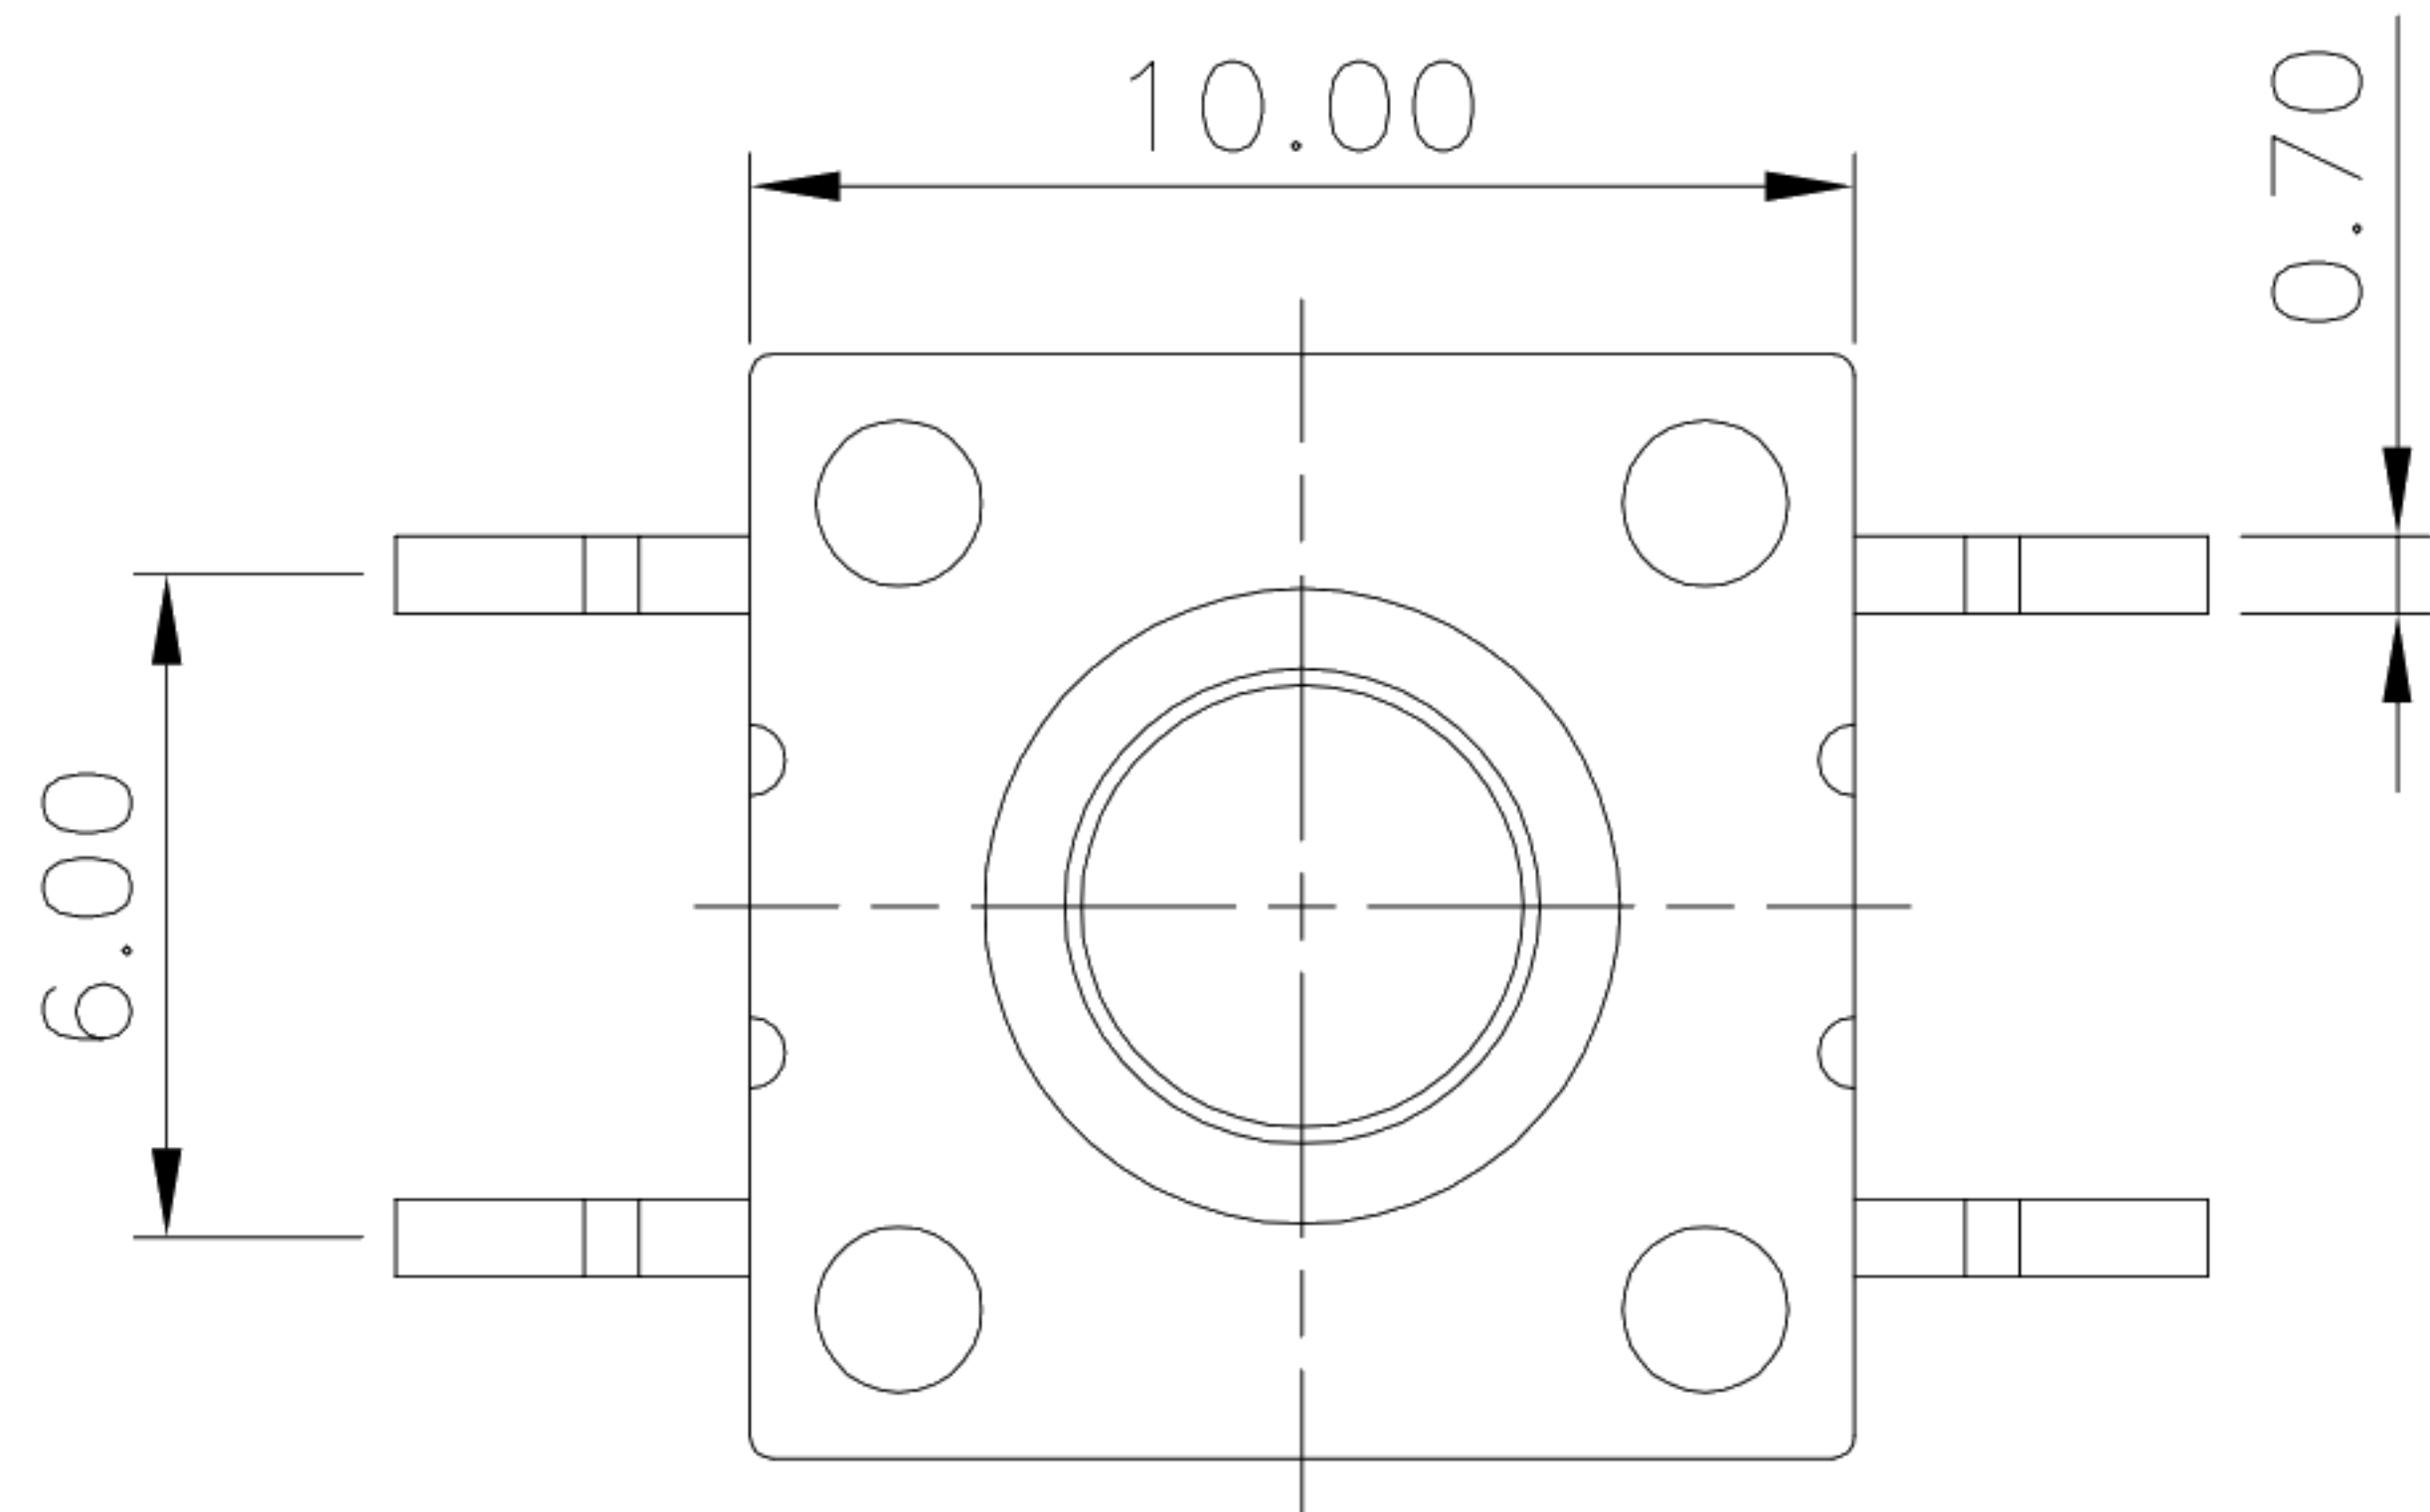

PCB Layout(Pattern side)

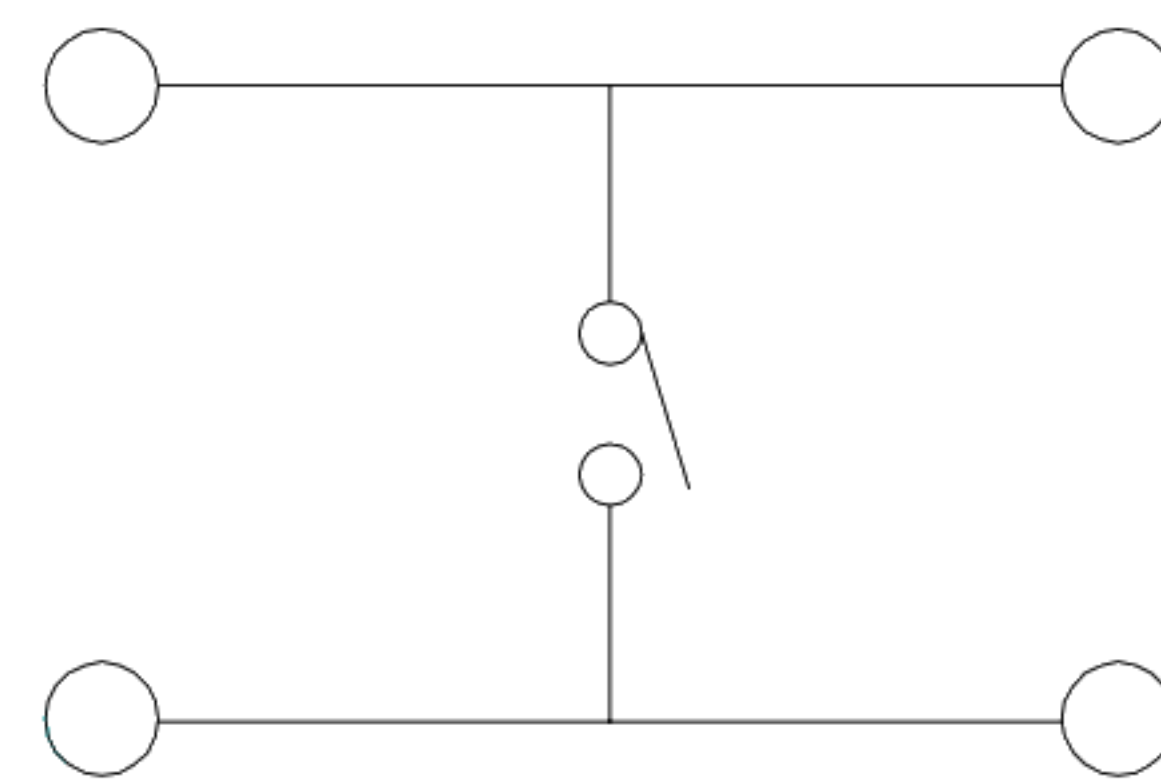

Circuit Diagram

SCHEMATIC

NO.2	
PART NO	vigor
4	250±30

NO.3	
PART NO	MATERIAL/QTY
S	SUS/1PC

NO.4—NO.5	
PART NO	NOTE
01~99	SERIAL NUMBER

Typical Specifications :
1. Rating : DC 12V 50mA
2. Life:100,000 Cycles Min.

注：“*” 表示关键尺寸(4个).

8					TOLERANCE UNLESS SPECIFIED						
7											
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版		ZENQ. CHEN	
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.	
4	CONTACT	SUS	1	Ag CLAD	TITLE : TACT SWITCH			UNIT : mm	DRWG NO.: XB-TS-1010MT		
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED				MODEL:			SCALE: 5:1
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.						
1	KNOB	PPA	1	BLACK					APPD.	ZENQ. CHEN	2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH							