

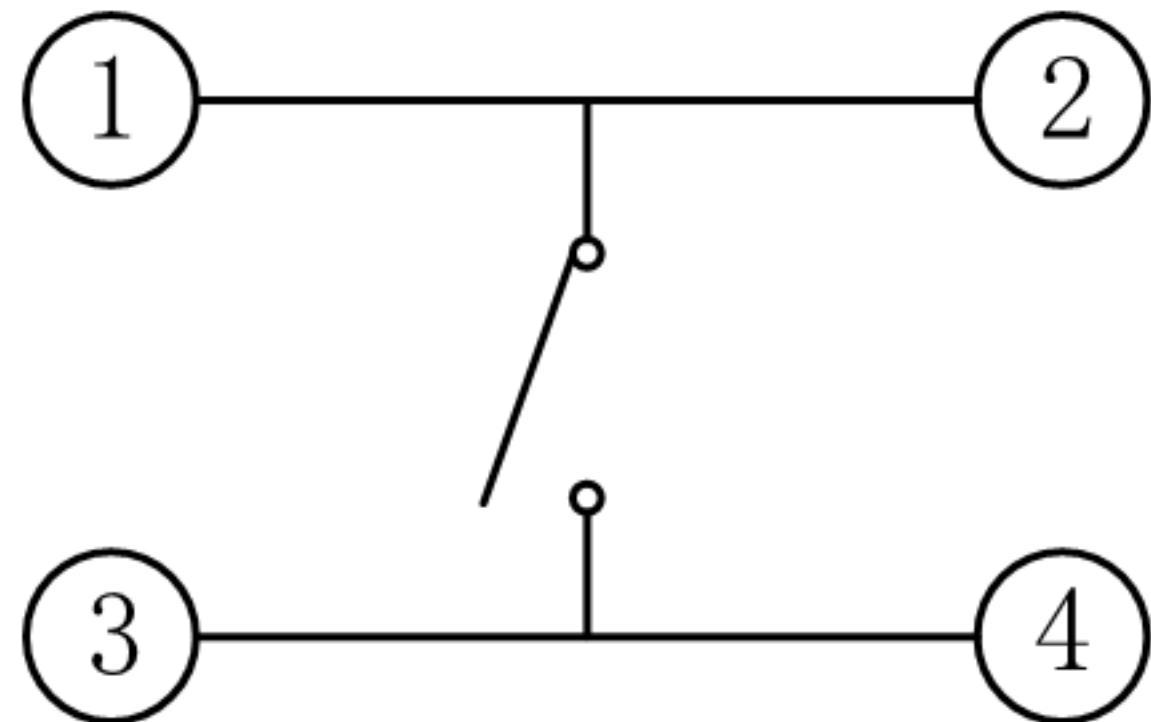
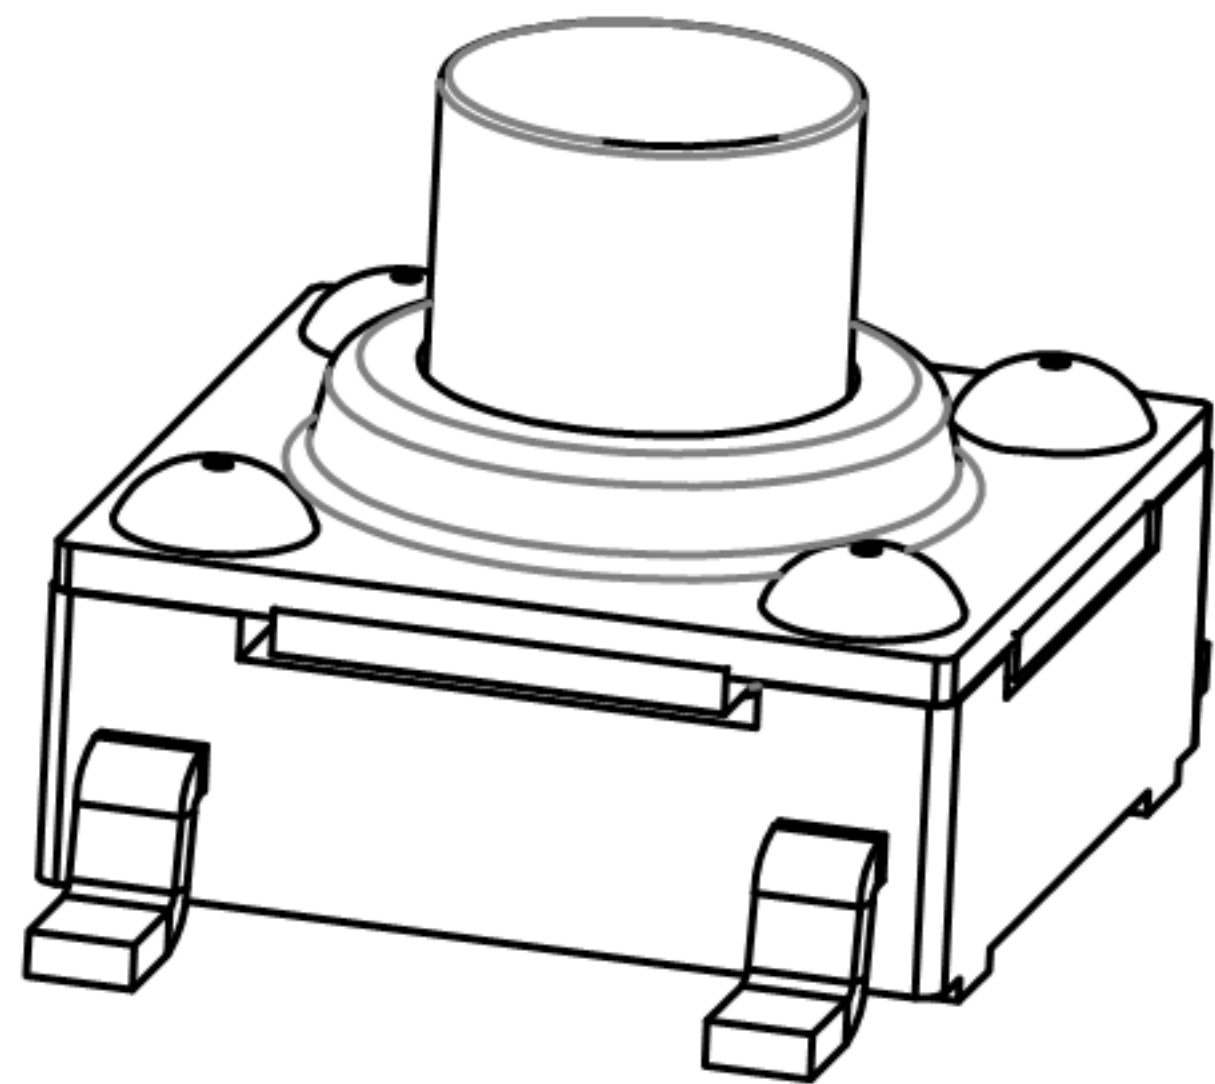
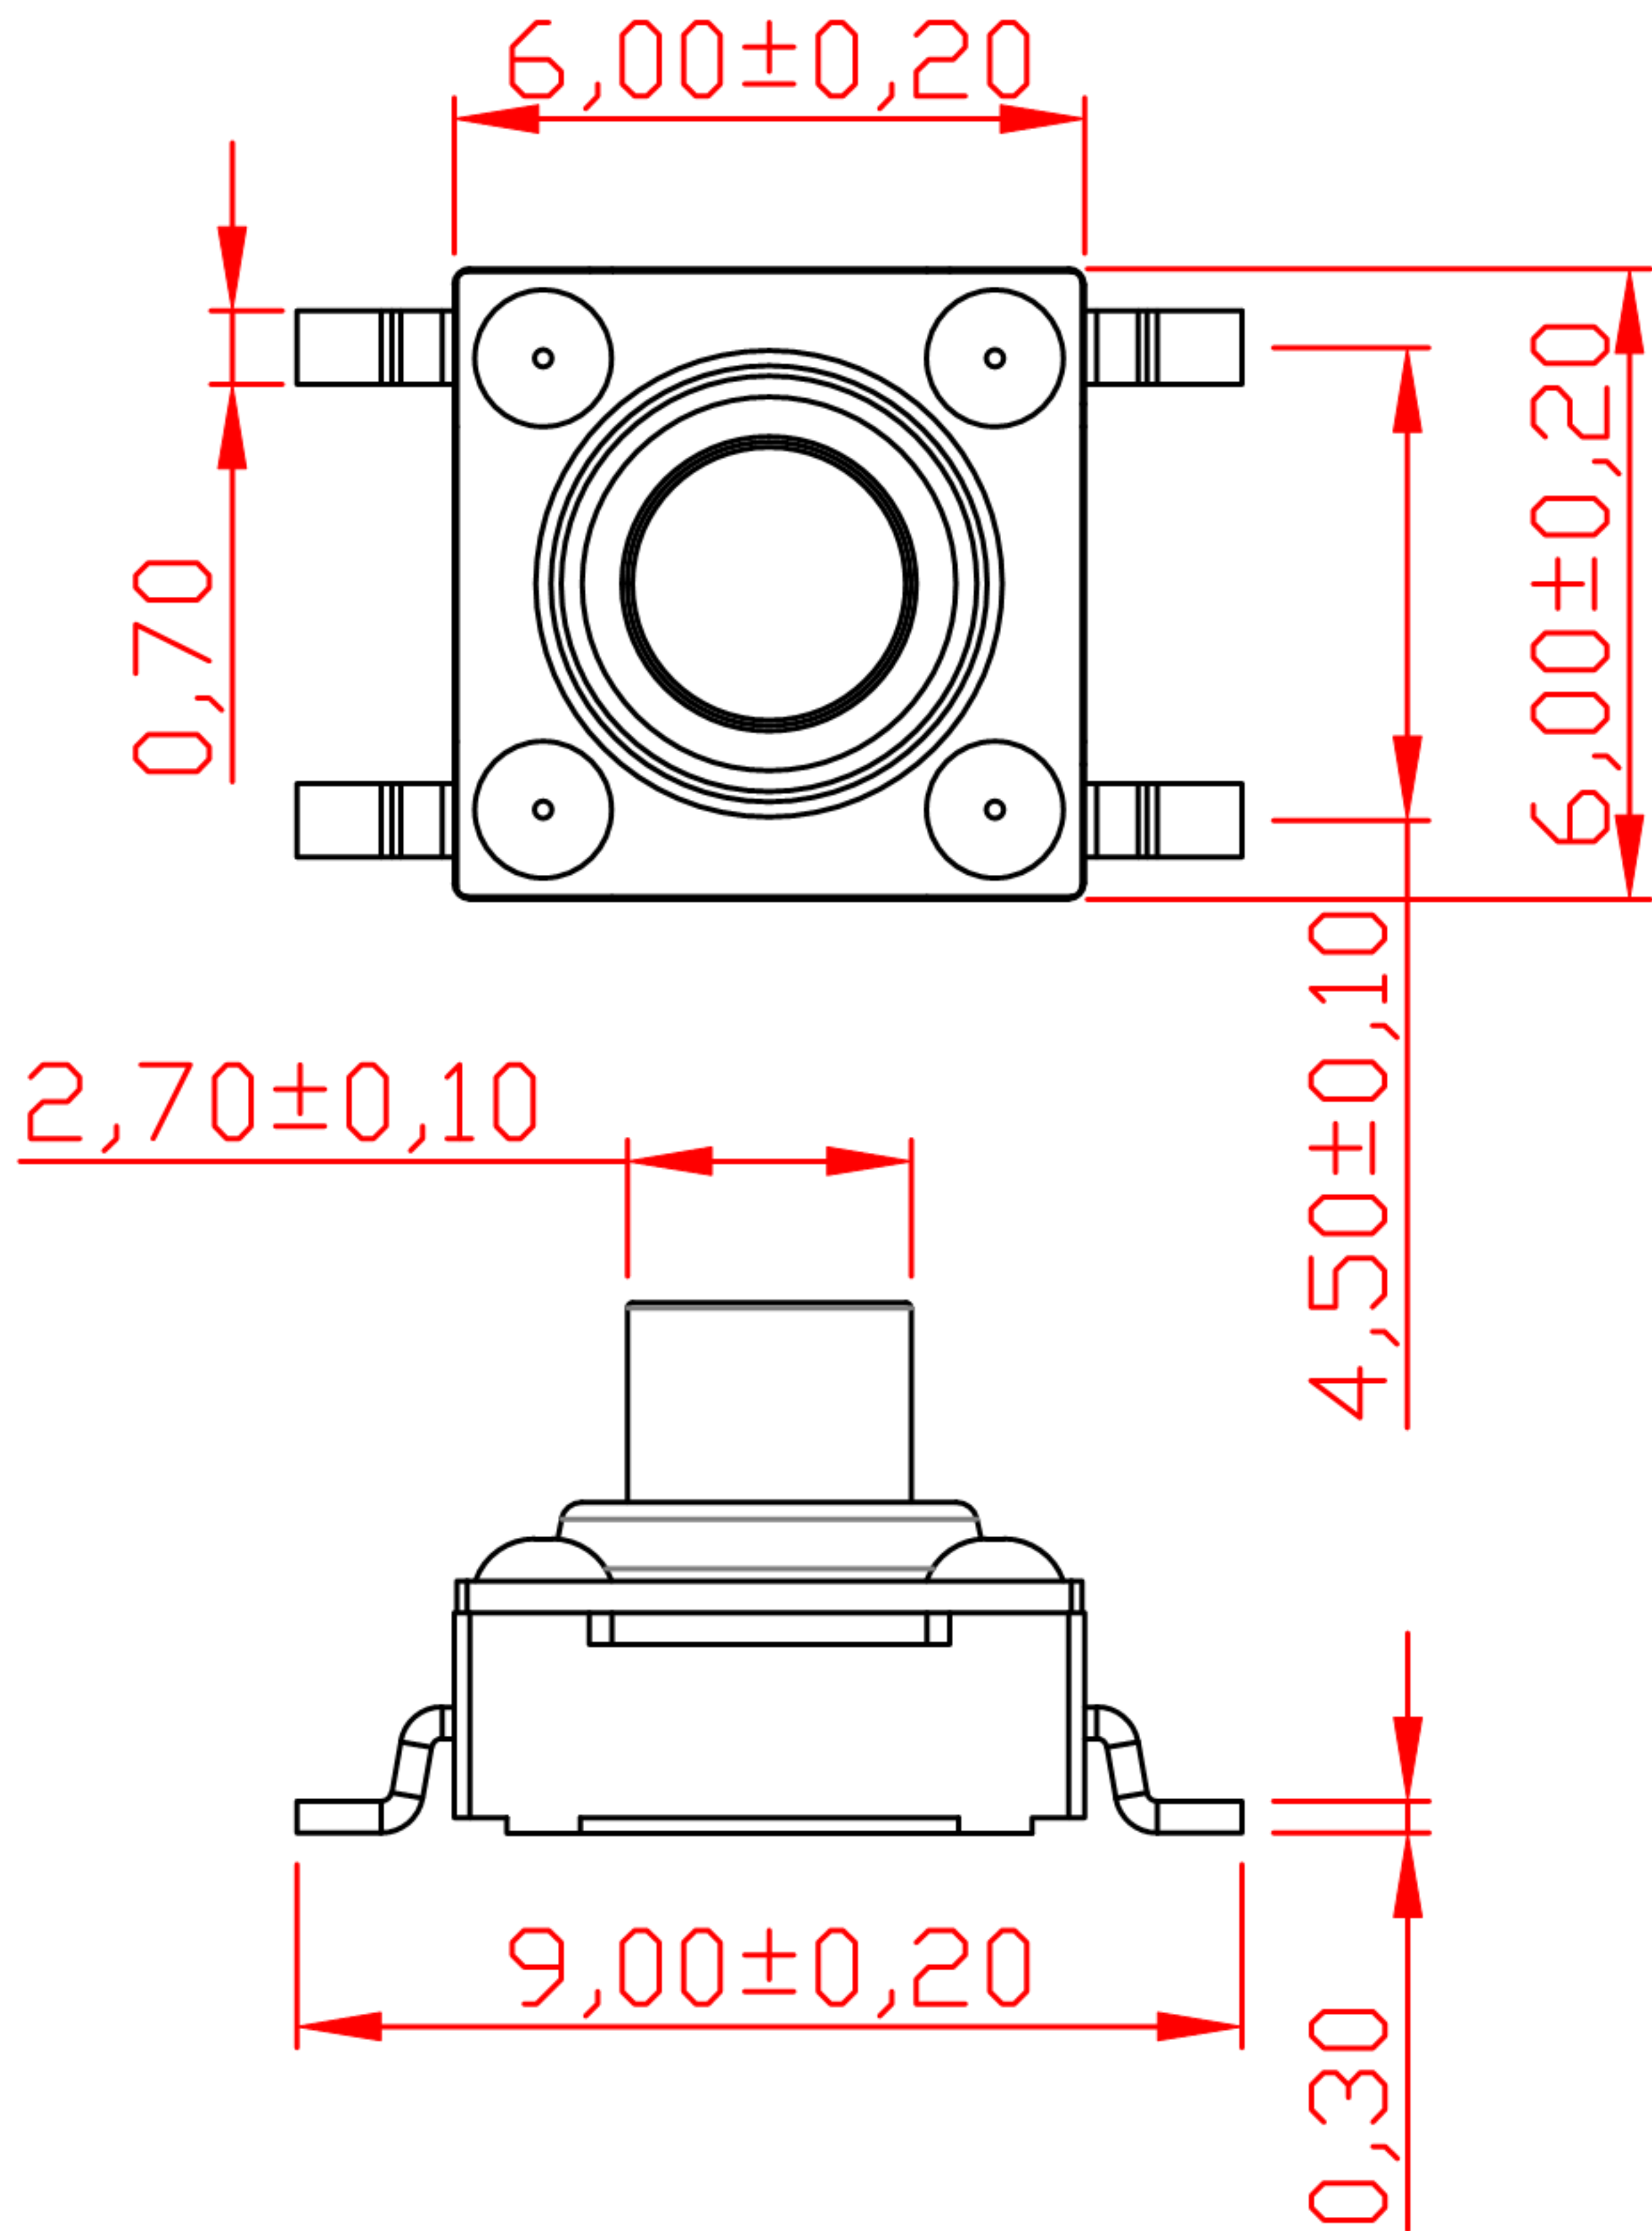
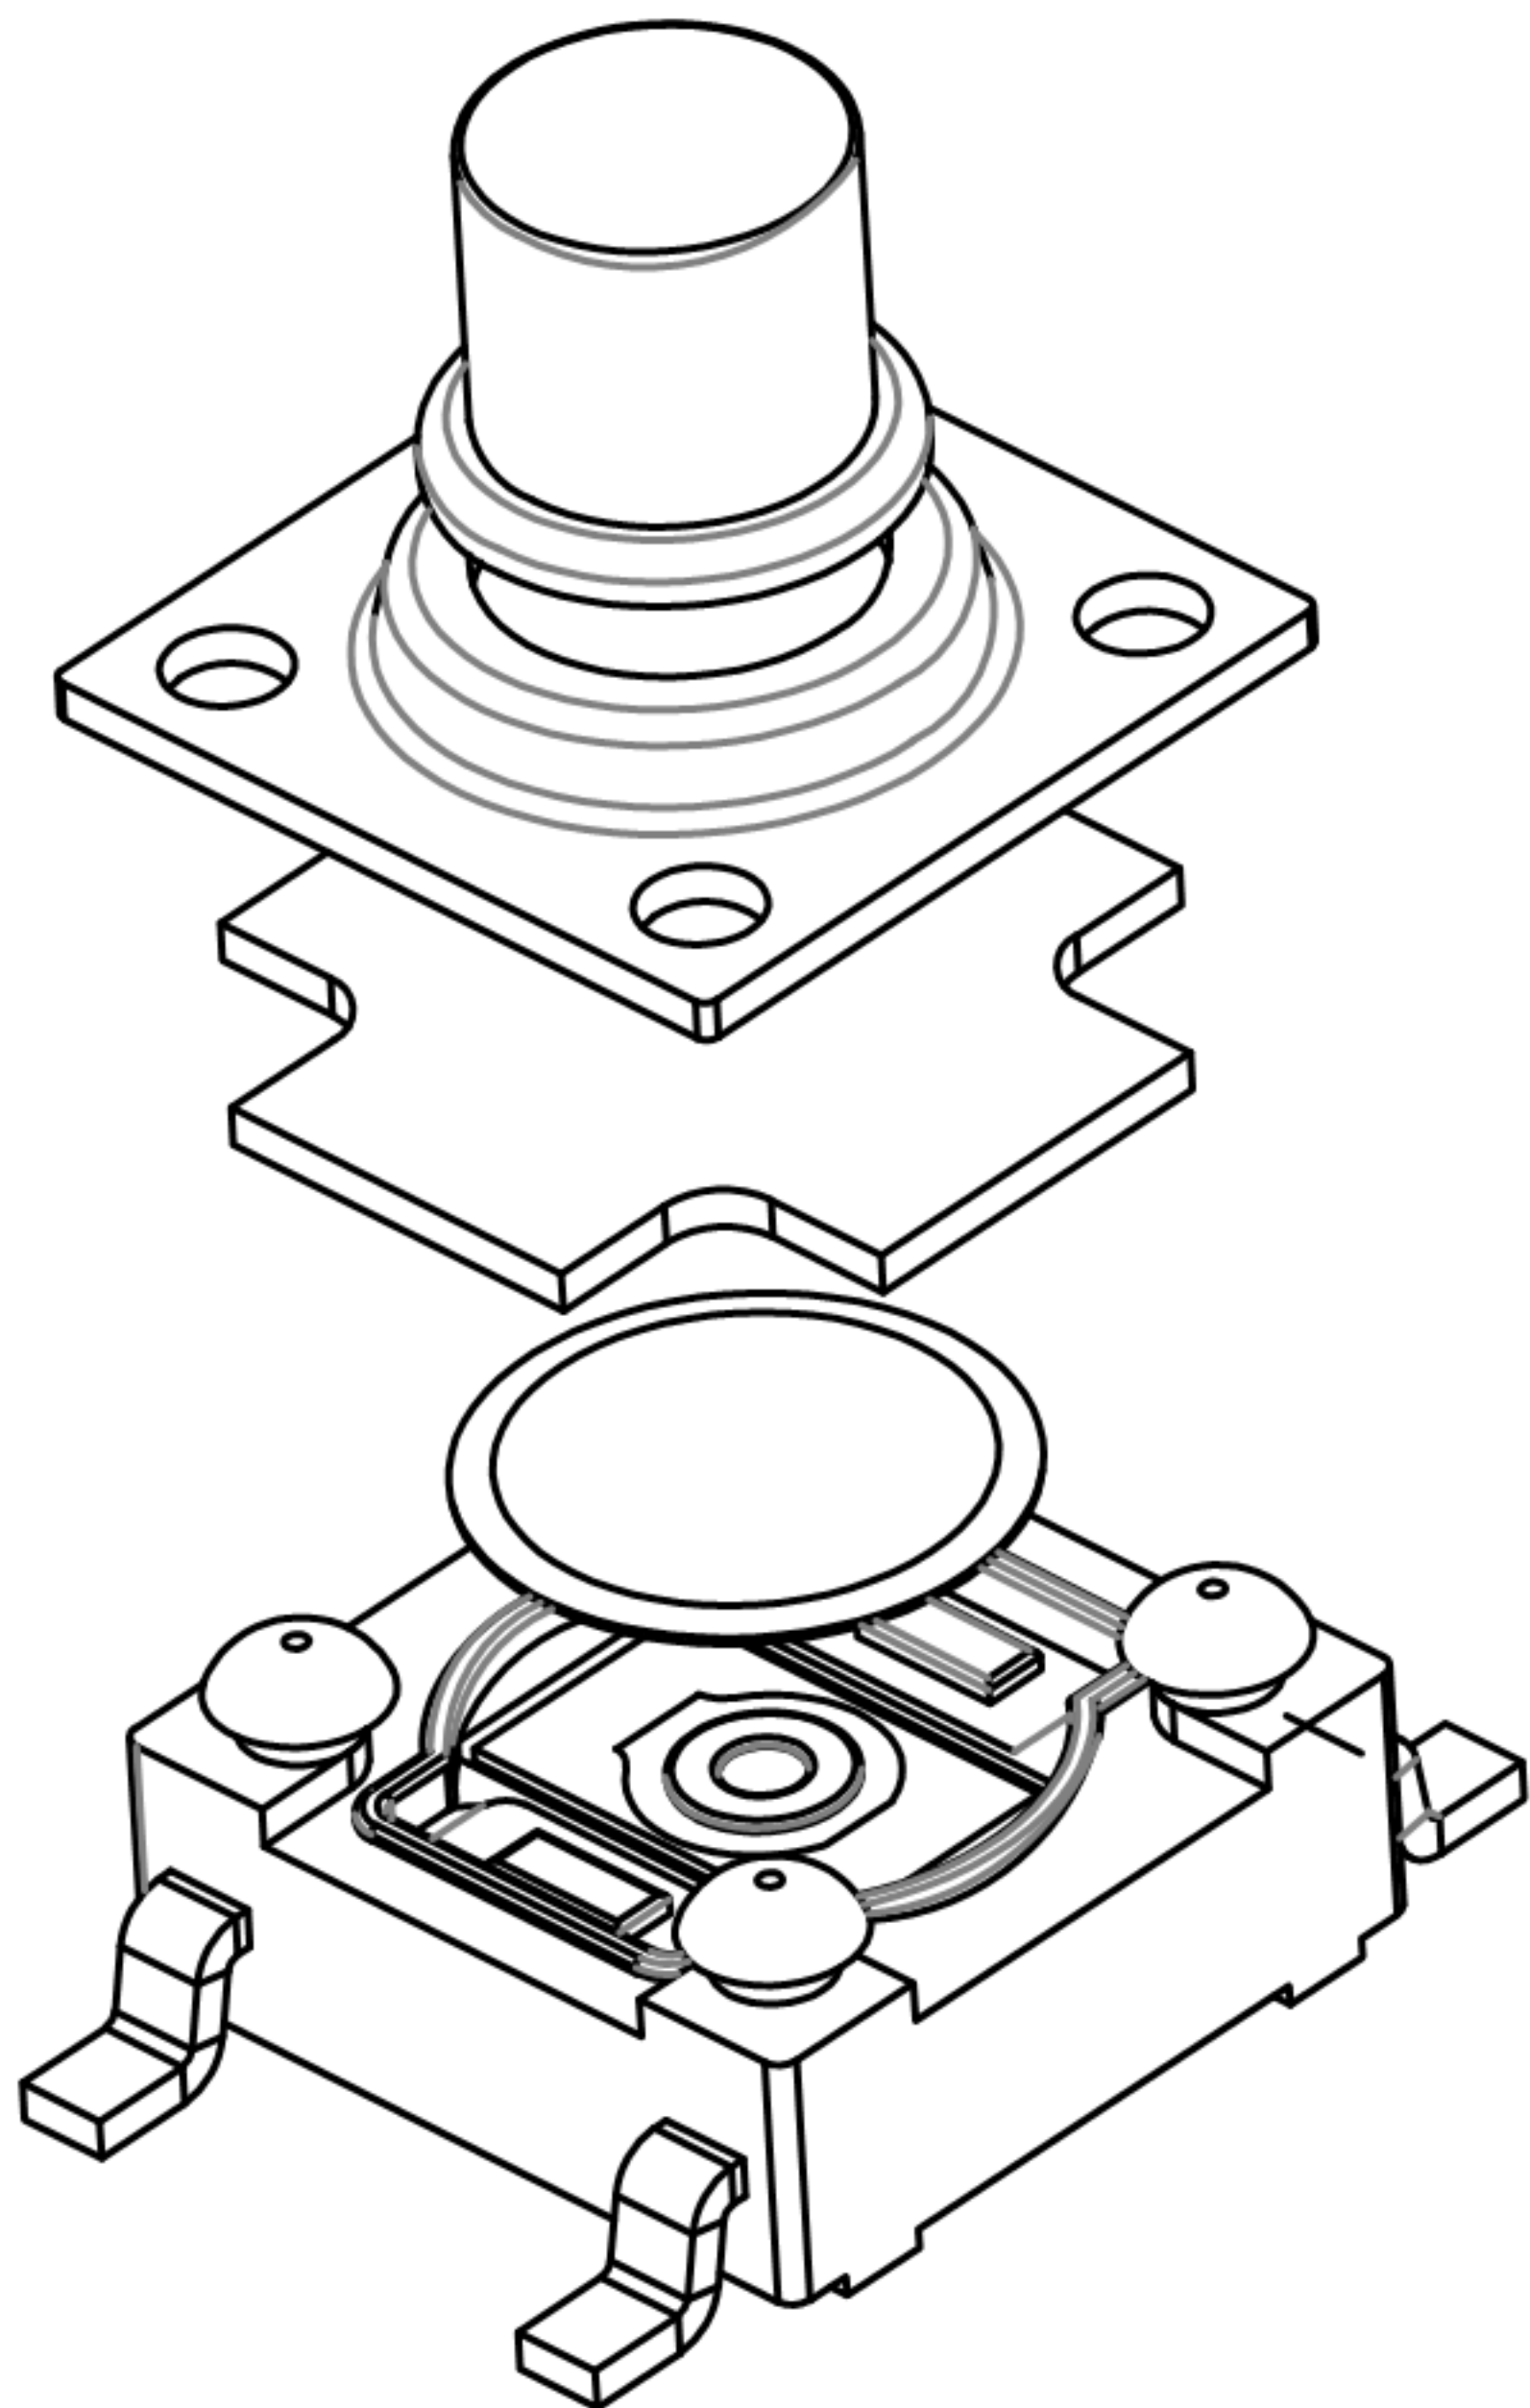


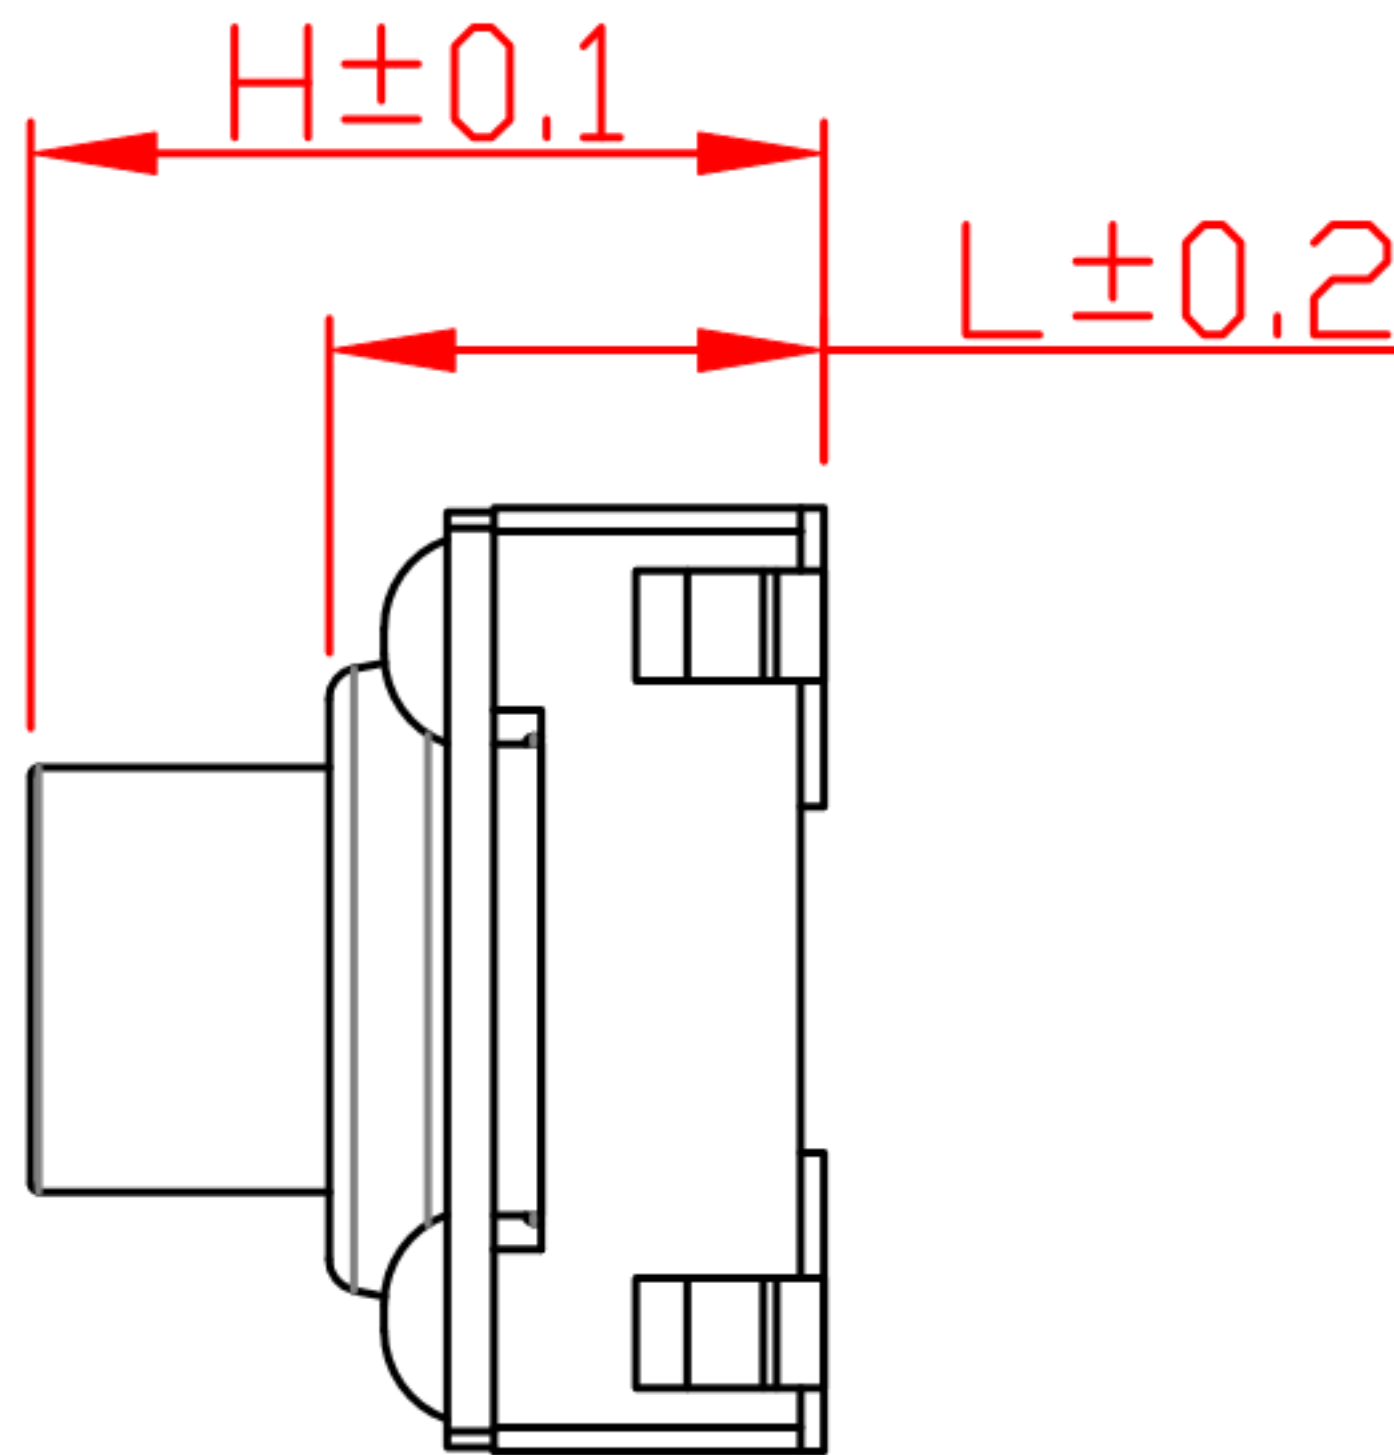

SCHEMATIC

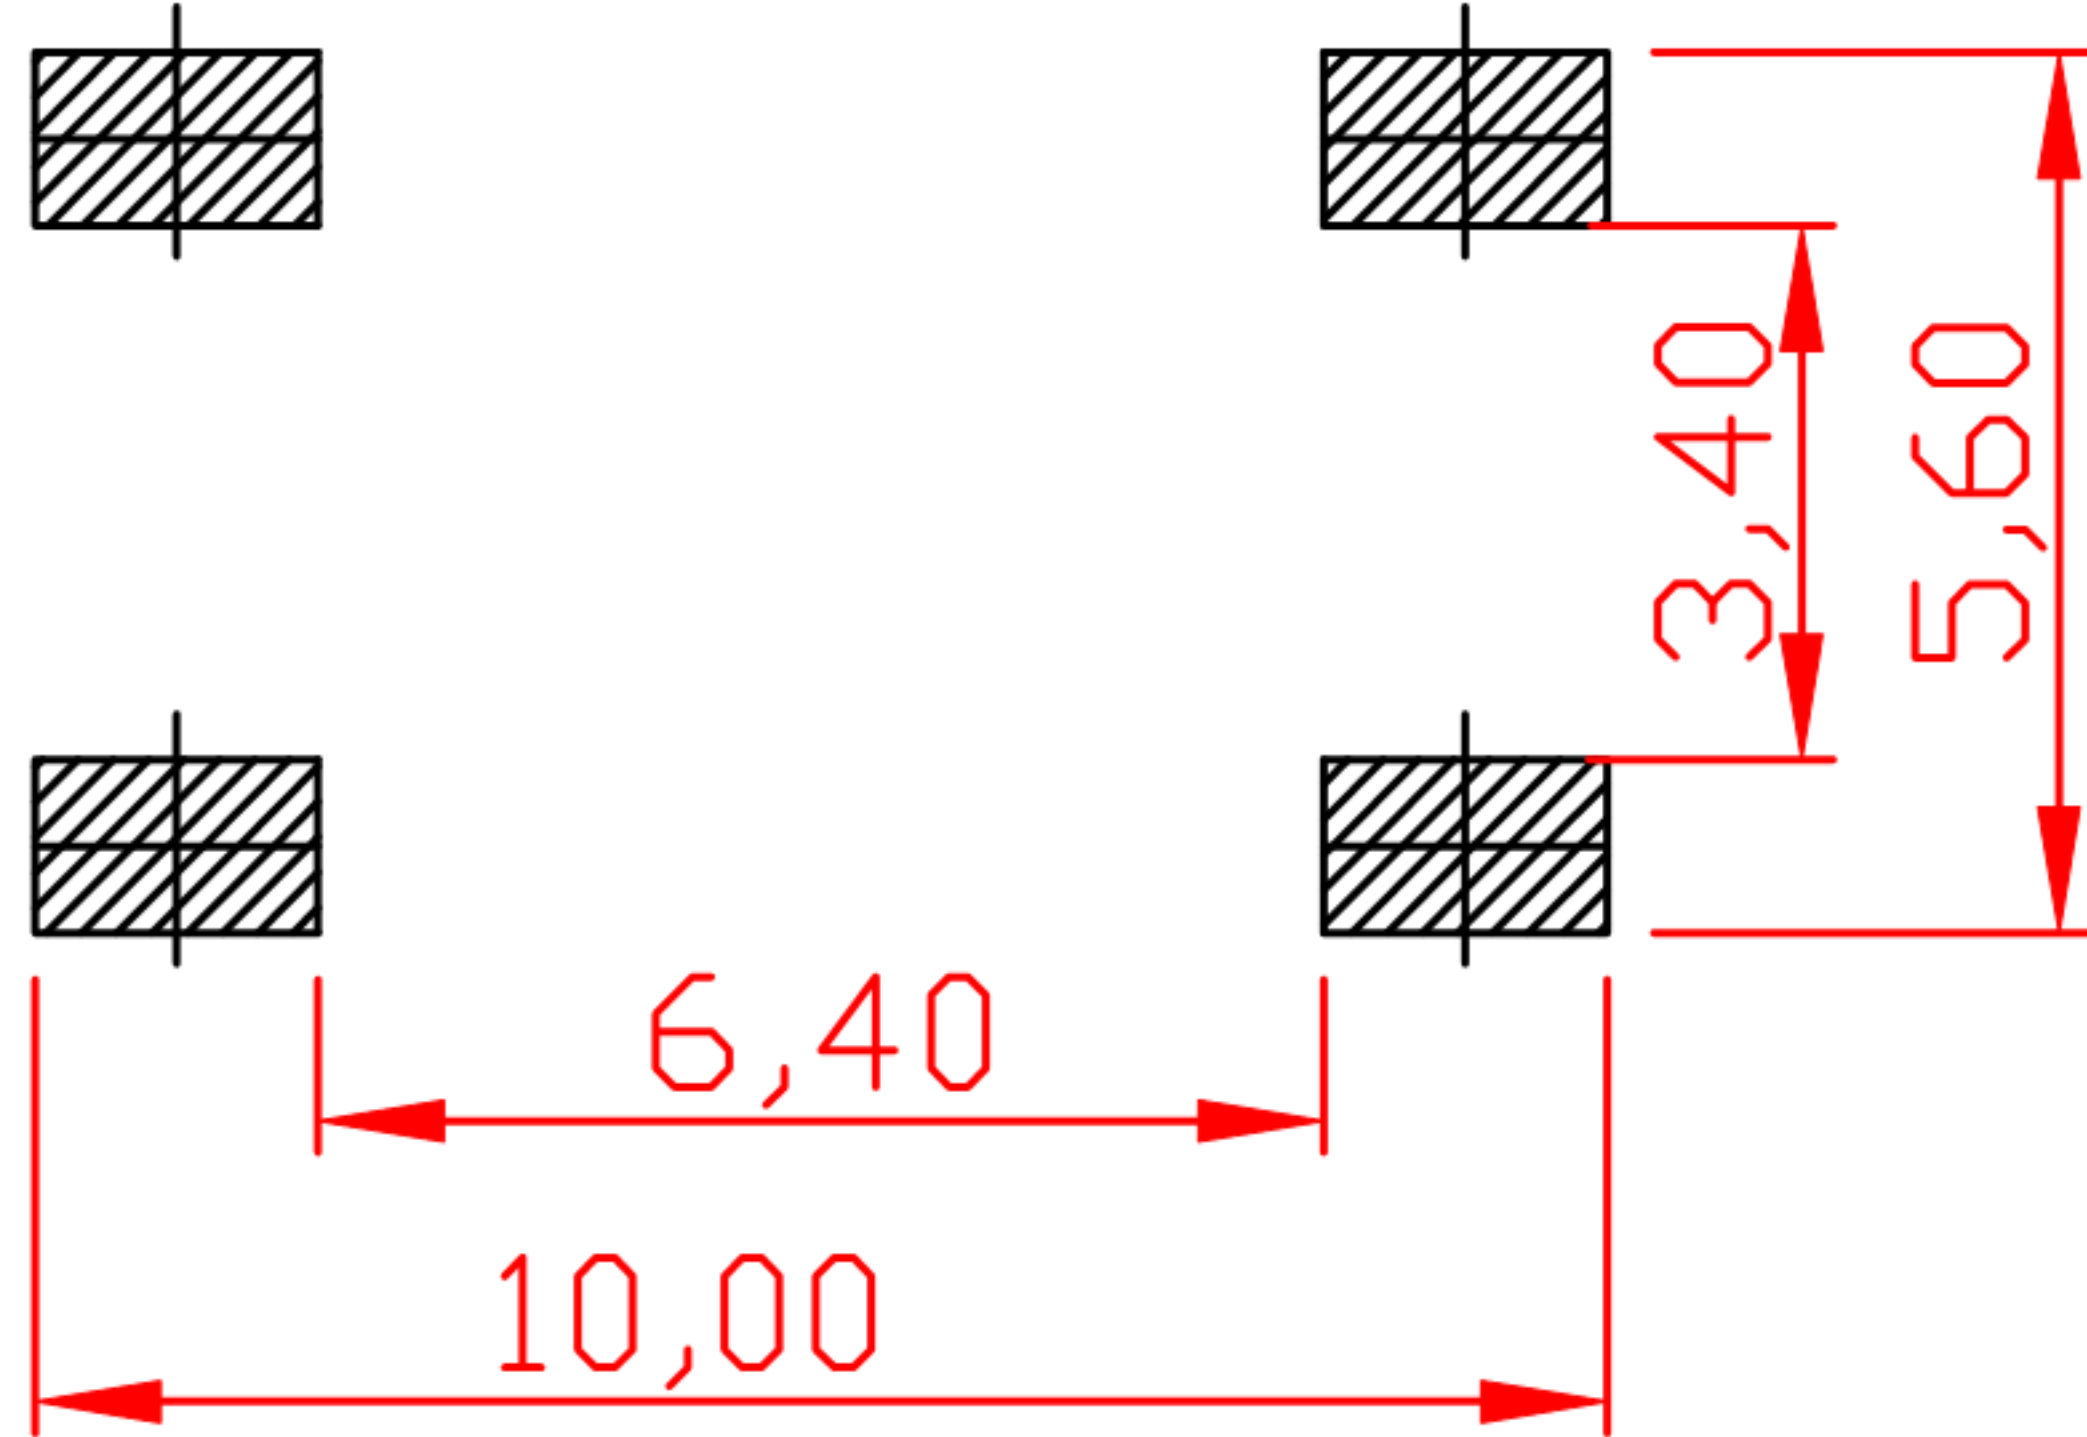

PCB. 焊接图

- 主要技术规格:
- 1. 额定值: 50mA DC12V
 - 2. 接触电阻: $\leq 50m\Omega$
 - 3. 操作力: $250 \pm 30gf$
 - 4. 行程: $0.30 \pm 0.1mm$
 - 5. 绝缘电阻: $\geq 100M\Omega$
 - 6. 抗电强度: 250V 50HZ 1Min.
 - 7. 寿命: 100,000 Cycles
 - 8. 防水等级: IP67
 - 9. 防银迁移: 60V, 85°C, 90%RH/60H

8					TOLERANCE UNLESS SPECIFIED				
7									
6					WITHIN 1.5mm : $\pm 0.1mm$ OVER 1.5mm : $\pm 0.2mm$	A	2012-9-25	初 版	ZENQ. CHEN
5						ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : TACT SWITCH			UNIT : mm	DRWG NO.: XB-TS-1160M
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL:			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH					