

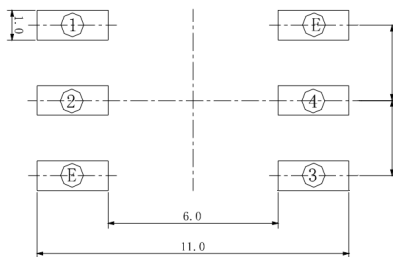





CAD FILE:

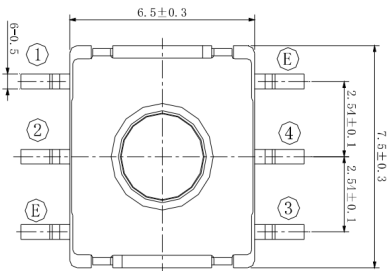


PCB WELDING DIMENSIONS

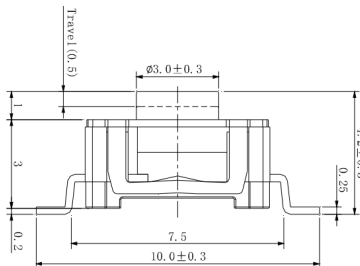

REFERENCE DRAWING



MATERIAL PORTFOLIO CHART

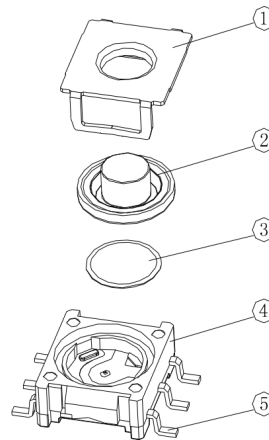

- SPECIFICATION
1. Rating: DC 48V 50mA Max, DC 20mV 0.5mA Min
 2. Contact resistance: 100mΩ MAX
 3. Insulation resistance: 100MΩ Min, 100V
 4. Dielectric strength: 250VAC/min
 5. Travel: 0.5±0.3mm
 6. Operating force: 200gf±100gf (1.96N±0.98N)
 7. Operating life: ≥10X10⁶ cycles
 8. Operating temp: -25°C to +70°C
 9. Storage temp: -40°C to +70°C
 10. Protection grade: IP65

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初版	ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Tact Switch			UNIT : mm	DRWG NO.: 6.5X7.5
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-TS-6575M6			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			CHK'D DONG. PANG 2012-9-25	
1	KNOB	PPA	1	BLACK				APPD. ZENQ. CHEN 2012-9-25	
NO.	PARTS	MATERIALS	Q'TY	FINISH					