

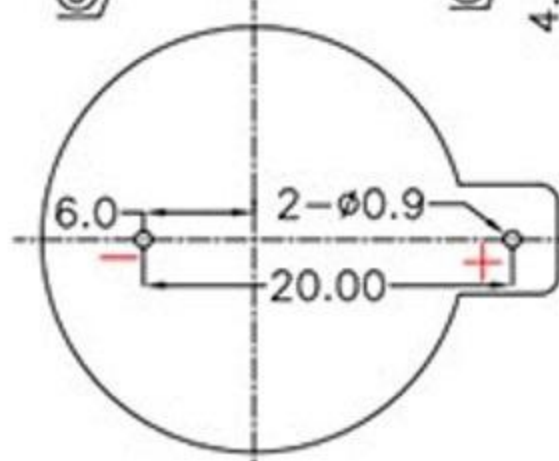
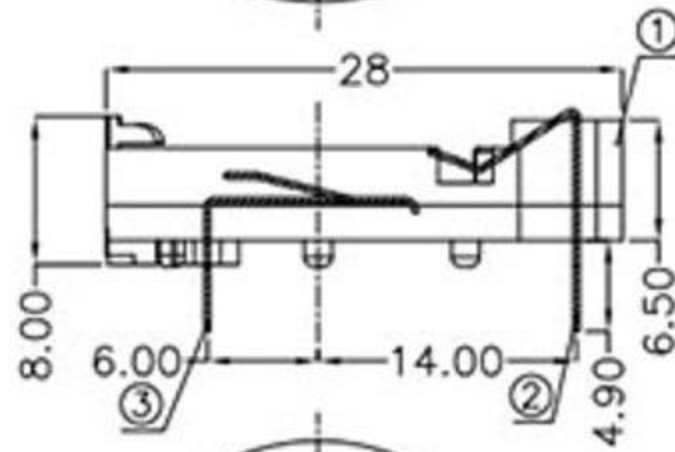


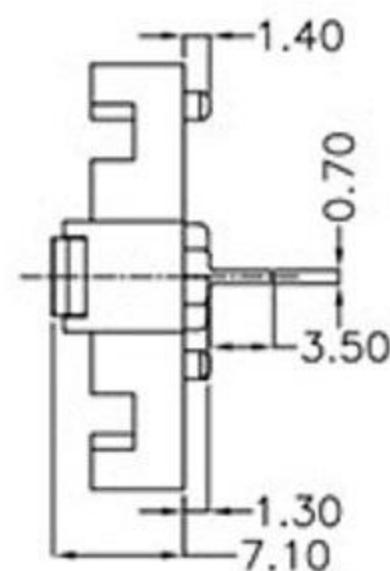

REV.	ECN NO.	REVISED	DATE

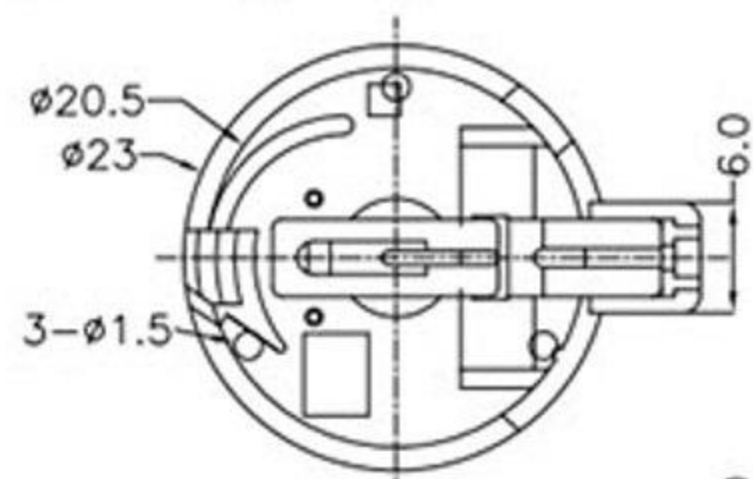

PCB Layout Diagram
Top View

NOTE:

1.MATERIAL:

- a.HOUSING:PBT
- b.CONTACT:BRASS
(SURFACE PLATING: Sn100u"-120u")
SEE ORDERING INFORMATION

2.ELECTRIC:

- a.CONTACT RESISTANCE: 30 MILLIOHMS MAX
- b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN
- c.DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL
- d.OPERATING TEMPERATURE: -25°C~ +85°C

ORDERING INFORMATION

电池座系列

DIP 90° TYPE

PLATING:
A=30u"
J=NI100u"~120u"
K=Sn100u"~120u"

MATERIAL:
1A-PBT BLACK
1B-PA66 BLACK
2A-PPA BROWN
2B-PPA BLACK
3A-PPS BROWN
3B-PPS BLACK
4A-LCP WHITE
4B-LCP BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES		X3 东莞市溪榜电子有限公司	
DECIMALS: ANGLES:		DONG GUAN XI BANG ELECTRONICS CO., LTD.	
X .X ±0.30 X ±1°		DSND	DATE 2017-12-14
X.XX ±0.25 X.X ±0.5°		CHKD	DATE 2017-12-14
X.XXX ±0.20		APVD	DATE 2017-12-14
X.XXX ±0.10		SCALE: 2:1	SIZE: A4
WEIGHT: 1.8g		VIEW: ① ②	PART NO.:
SHEET 1 OF 1		UNIT: mm	REV.: A/0
		OBJECT: MY	DRAW NO.:

NO.	PART NAME	QTY	MATERIAL	PLATING & COLOR
3	TERMINAL(-)	1	BRASS, T=0.30mm	Sn Plating
2	TERMINAL(+)	1	BRASS, T=0.30mm	Sn Plating
1	HOUSING	1	PBT	BLACK