



REV.	ECN NO.	REVISED	DATE

NOTE:

1.MATERIAL:

a.HOUSING:PA66 UL94V-0

b.CONTACT:Stainless Steel

(SURFACE PLATING: Ni100u"-120u")

SEE ORDERING INFORMATION

2.ELECTRIC:

a.CONTACT RESISTANCE: 30 MILLIOHMS MAX

b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN

c.DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL

d.OPERATING TEMPERATURE: -55°C~ +105°C



ORDERING INFORMATION

电池座系列

DIP 90° TYPE

PLATING:
A=Au1U"
J=Ni100u"-120u"
K=Sn100u"-120u"

MATERIAL:
1A-PBT BLACK
1B-PA66 BLACK
2A-PPA BROWN
2B-PPA BLACK
3A-PPS BROWN
3B-PPS BLACK
4A-LCP WHITE
4B-LCP BLACK

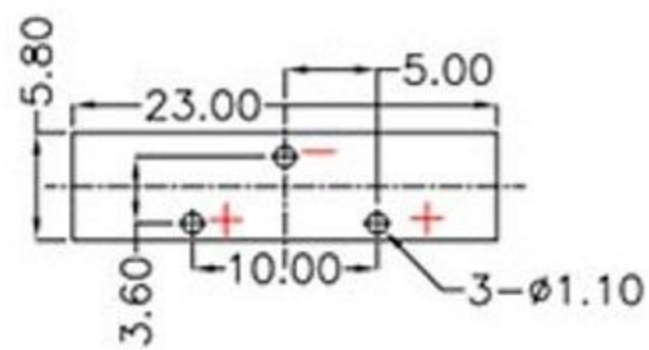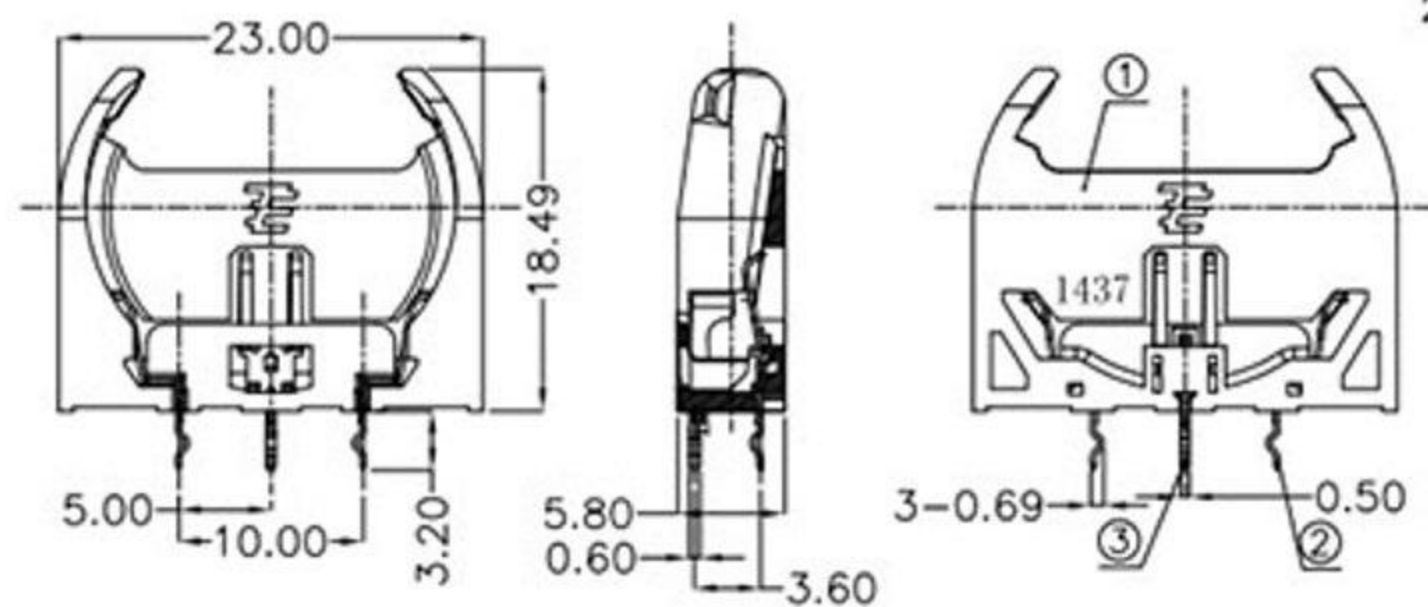

PCB Layout Diagram
Top View

UNLESS OTHERWISE SPECIFIED TOLERANCES		XG 东莞市溪榜电子有限公司	
DONG GUAN XI BANG ELECTRONICS CO., LTD.		TITLE:	
DECIMALS: X ±0.30	ANGLES: X ±1°	DATE	2017-07-16
X.X ±0.25	X.X ±0.5°	DATE	2017-07-16
X.XX ±0.20		DATE	2017-07-16
X.XXX ±0.10		DATE	2017-07-16
WEIGHT: 0.68g	SCALE: 2:1	SIZE: A4	VIEW: ① ②
SHEET 1 OF 1	UNIT: mm	REV.: A/0	OBJECT: MY
PART NO.:		DRAW NO.	

NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR
3	TERMINAL(-)	1	Stainless Steel, T=0.25MM	Ni-Plating
2	TERMINAL(+)	1	Stainless Steel, T=0.25MM	Ni-Plating
1	HOUSING	1	PA66	BLACK