



REV.	ECN NO.	REVISED	DATE

NOTE:

1.MATERIAL:

a.HOUSING:LCP UL94V-0

b.CONTACT:PHOSPHOR BRONZE

(SURFACE PLATING:Sn100u"-120u")

SEE ORDERING INFORMATION

2.ELECTRIC:

a.CONTACT RESISTANCE: 30 MILLIOHMS MAX

b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN

c.DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL

d.OPERATING TEMPERATURE: -25°C~ +85°C

ORDERING INFORMATION

电池座系列

DIP 90° TYPE

PLATING:

A-Au1U"

J-Ni100U"~120U"

K-SN100U"~120U"

MATERIAL:

1A-PBT BLACK

1B-PA66 BLACK

2A-PPA BROWN





2B-PPA BLACK

3A-PPS BROWN

3B-PPS BLACK

4A-LCP WHITE

4B-LCP BLACK

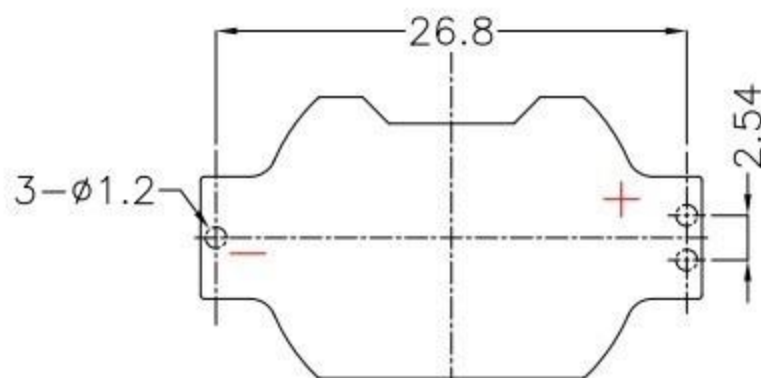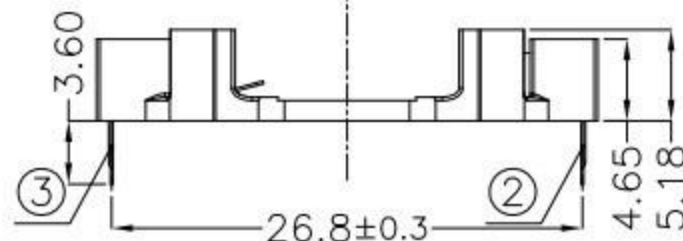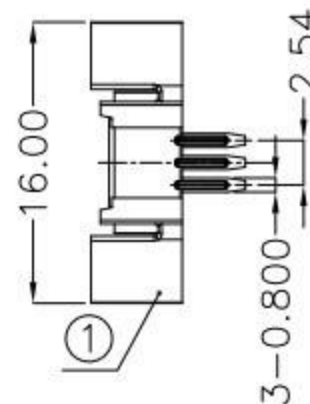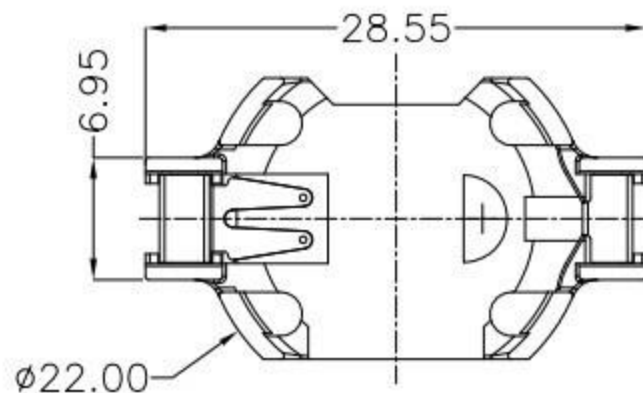

PCB Layout Diagram
Top View

UNLESS OTHERWISE SPECIFIED TOLERANCES				东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
DECIMALS:	ANGLES:	DSND	DATE	2017-07-11	TITLE:		
X : ±0.30	X : ±1°	CHKD	DATE	2017-07-11			
X.X : ±0.25	X.X : ±0.5°	APVD	DATE	2017-07-11	PART NO.:		
X.XX : ±0.20		WEIGHT: 1.02g	SCALE: 2:1	SIZE: A4	VIEW: ① ②		
X.XXX : ±0.10		SHEET 1 OF 1	UNIT: mm	REV.: A/0	OBJECT: MY	DRAW NO.:	

NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR
3	TERMINAL(-)	1	PHOSPHOR BRONZE, T=0.20mm	Sn Plating
2	TERMINAL(+)	1	PHOSPHOR BRONZE, T=0.20mm	Sn Plating
1	HOUSING	1	LCP	WHITE