



REV.	ECN NO.	REVISED	DATE

1.MATERIAL:
a.HOUSING:PBT UL94V-0
b.CONTACT:PHOSPHOR BRONZE
(SURFACE PLATING:Sn100u"-120u")
SEE ORDERING INFORMATION

2.ELECTRIC:
a.CONTACT RESISTANCE: 30 MILLIOHMS MAX
b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN
c.DIELECTNIC VOLTAGE: 500V AC ONE SEC LEVEL
d.OPERATING TEMPERATURE: -25°C~ +85°C





ORDERING INFORMATION

电池座系列


DIP 90° TYPE

PLATING:
A-Au1U"
J-Ni100U"~120U"
K-Sn100U"~120U"
M-Si3U"~Ni10U"

MATERIAL:
1A-PBT BLACK
1B-PA66 BLACK
2A-PPA BROWN
2B-PPA BLACK
3A-PPS BROWN
3B-PPS BLACK
4A-LCP WHITE
4B-LCP BLACK

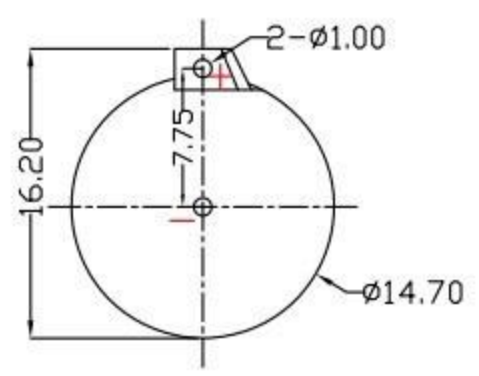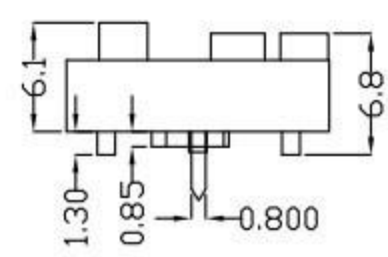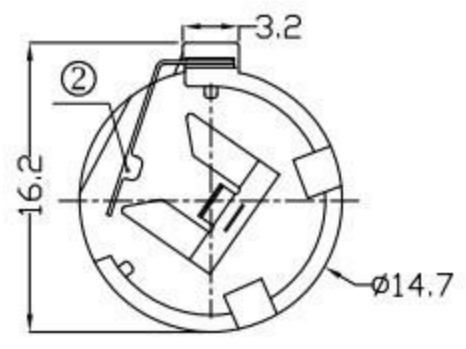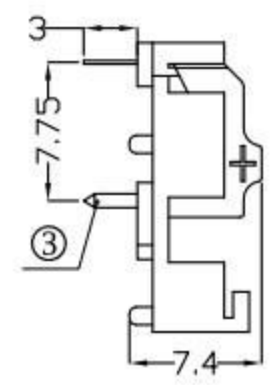

PCB Layout Diagram
Top View

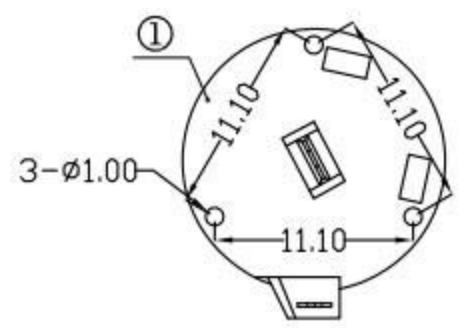

NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR
3	TERMINAL(-)	1	PHOSPHOR BRONZE, T=0.20mm	Sn plating
2	TERMINAL(+)	1	PHOSPHOR BRONZE, T=0.20mm	Sn plating
1	HOUSING	1	PBT	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES		 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
DECIMALS: ANGLES:		DSND	DATE		TITLE:
X :±0.30 X :±1°		CHKD	DATE		
X.X :±0.25 X.X :±0.5°		APVD	DATE		PART NO.:
X.XX :±0.20					
X.XXX :±0.10					
WEIGHT: 1.91g		SCALE: 2:1	SIZE: A4	VIEW: 	
SHEET 1 OF 1		UNIT: mm	REV.: A/0	OBJECT: MY	DRAW NO.: