


RoHS

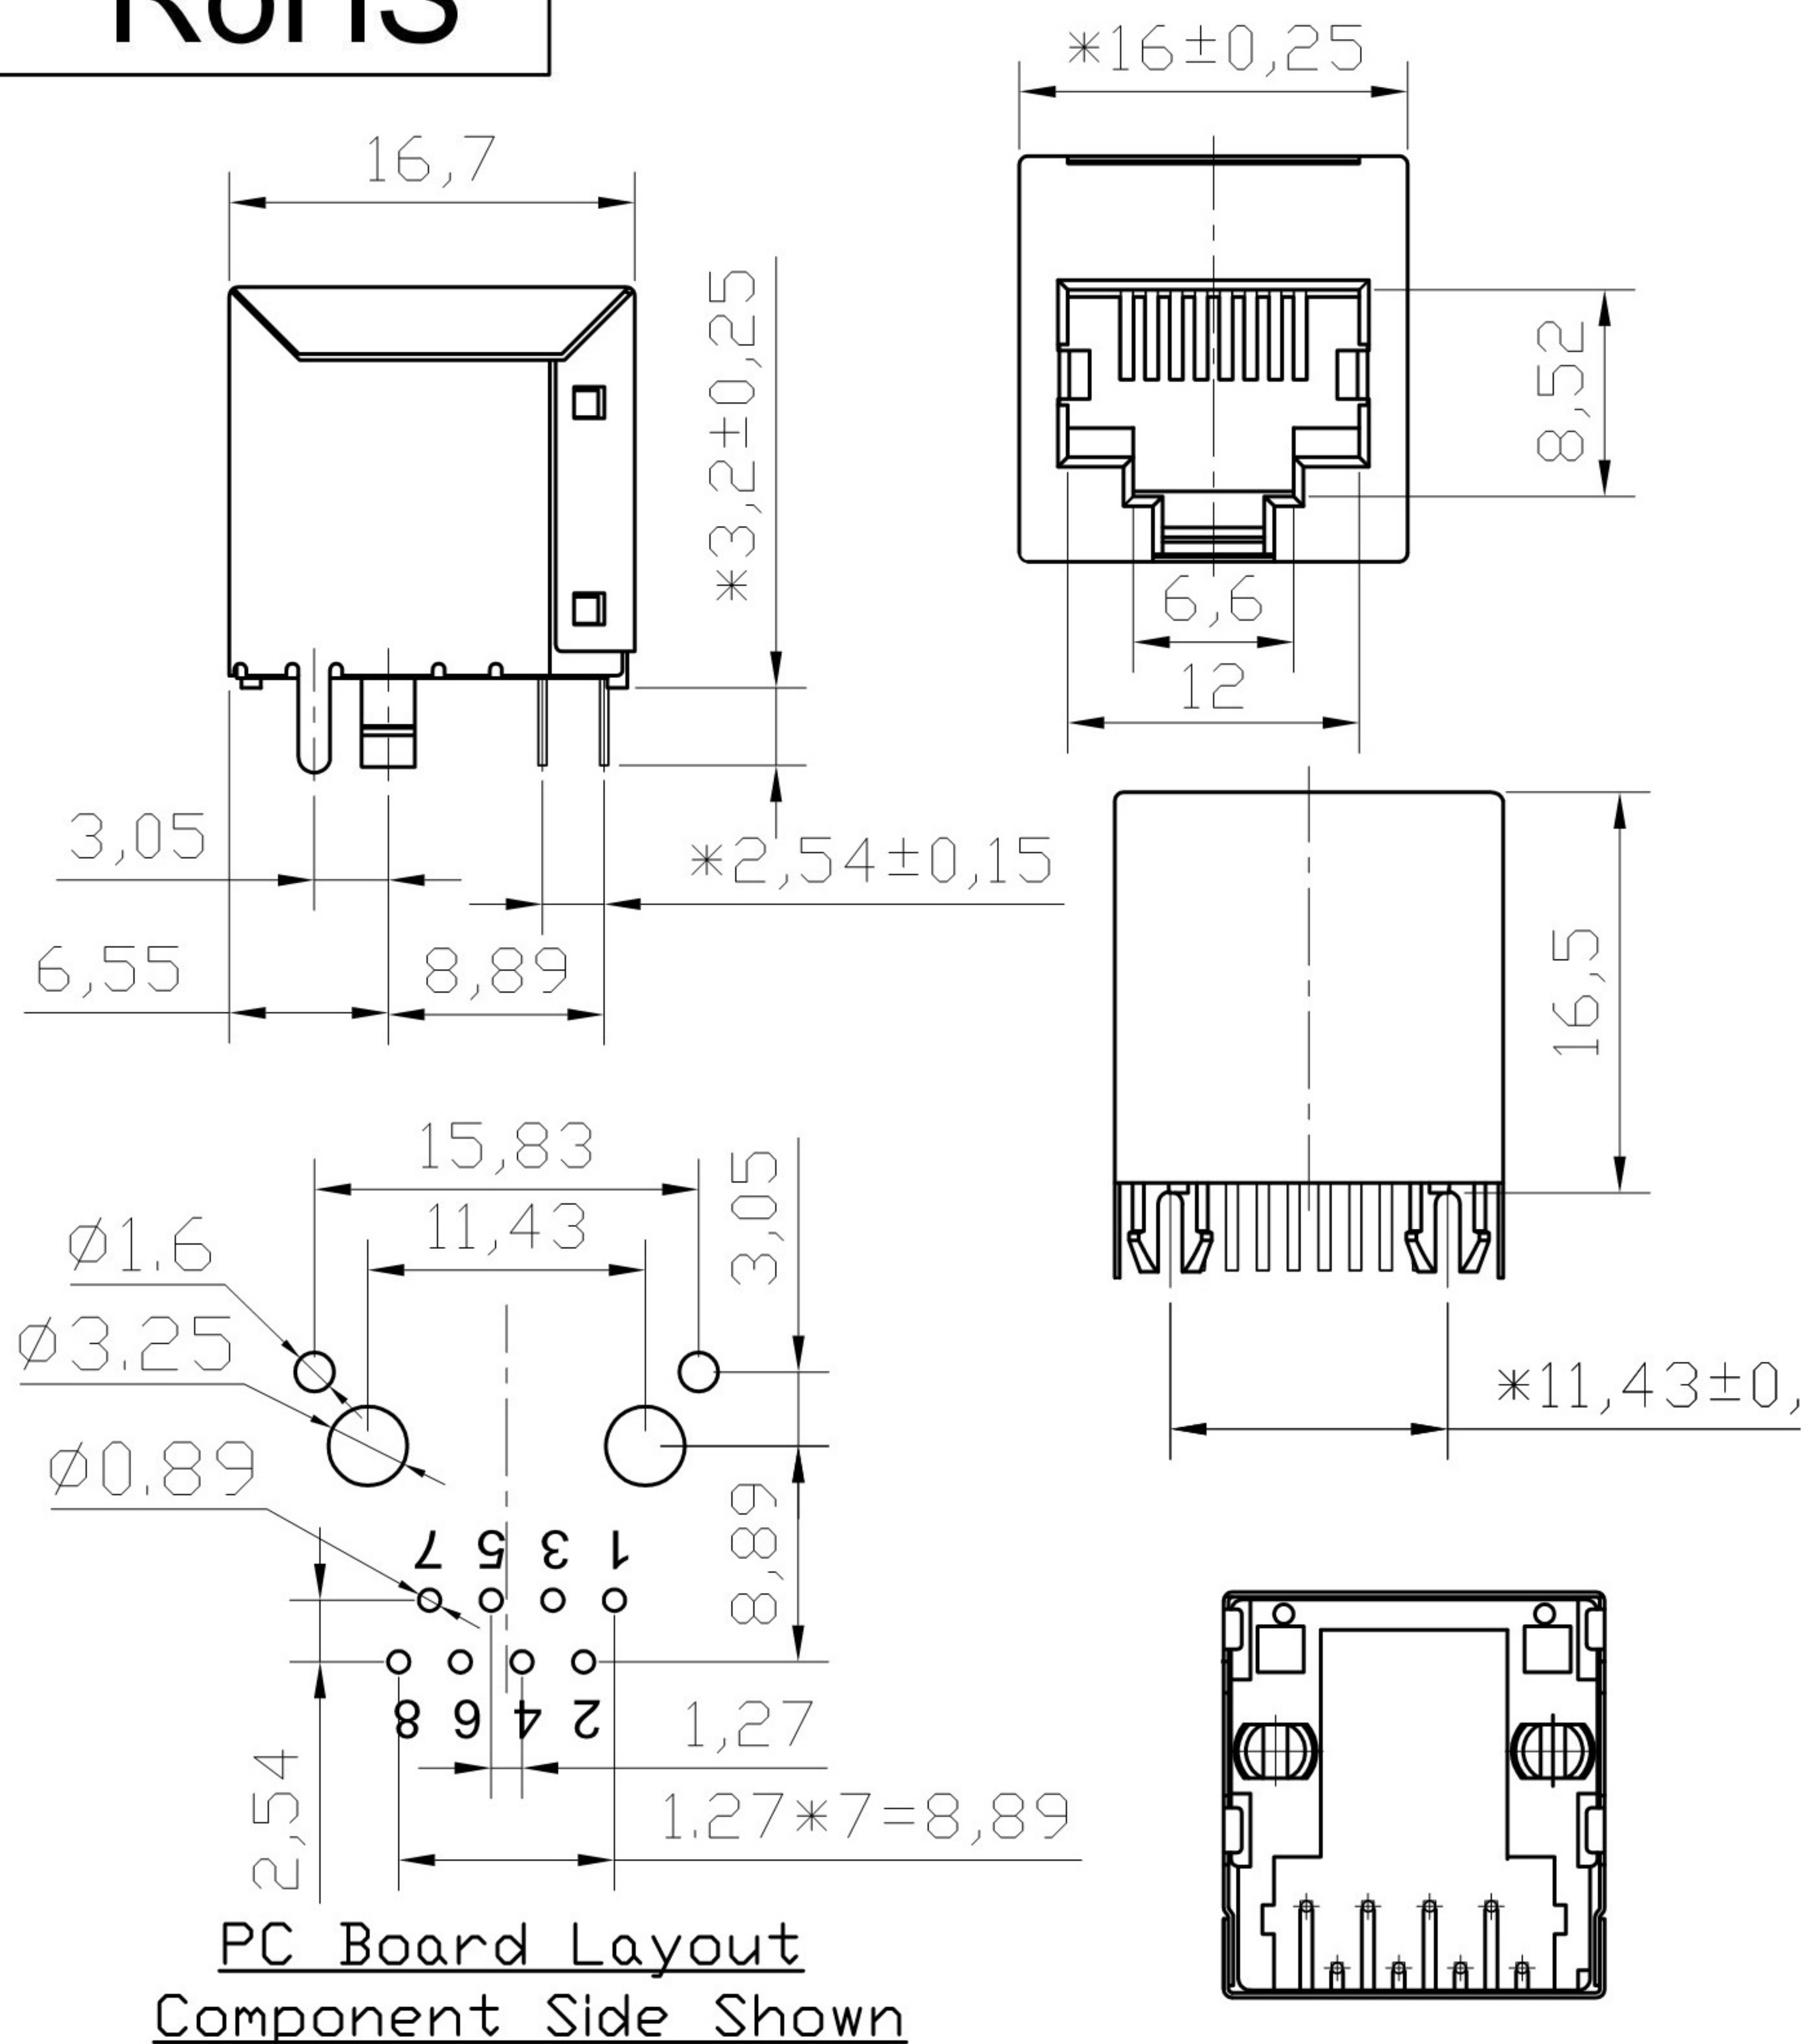

NOTES:

MATERIAL:

1. HOUSING MATERIAL :GLASS FILLED POLYESTER UL94V-0.
2. CONTACT MATERIAL :PHOSPHOR BRONZE $\phi=0.46\text{mm}$.
3. PLATING :SELECTING GOLD PLATING $3\mu\sim 50\mu$ OVER NICKEL
4. SHIELD: :0.20mm THICKNESS COPPER ALLY WITH NICKEL PLATED

ELECTRICAL:

1. VOLTAGE RATING :125 VAC RMS.
2. CURRENT RATING :1.5 AMP.
3. CONTACT RESISTANCE :30 MILLIOHMS MAX.
4. INSULATION RESISTANCE :500 MEGOHMS MIN @ 500V DC .
5. DIELECTRIC WITHSTANDING RESISTANCE :1000V AC RMS 50Hz. 1MIN.


MECHANICAL:

1. DURABILITY: :750 CYCLES MIN.
2. PCB RETENTION PRE-SOLDER :1 LB MIN.

ENVIRONMENTAL:

1. STORAGE : -40° C TO 85° C.
2. OPERATION : 0° C TO 70° C.

PART NUMBER:

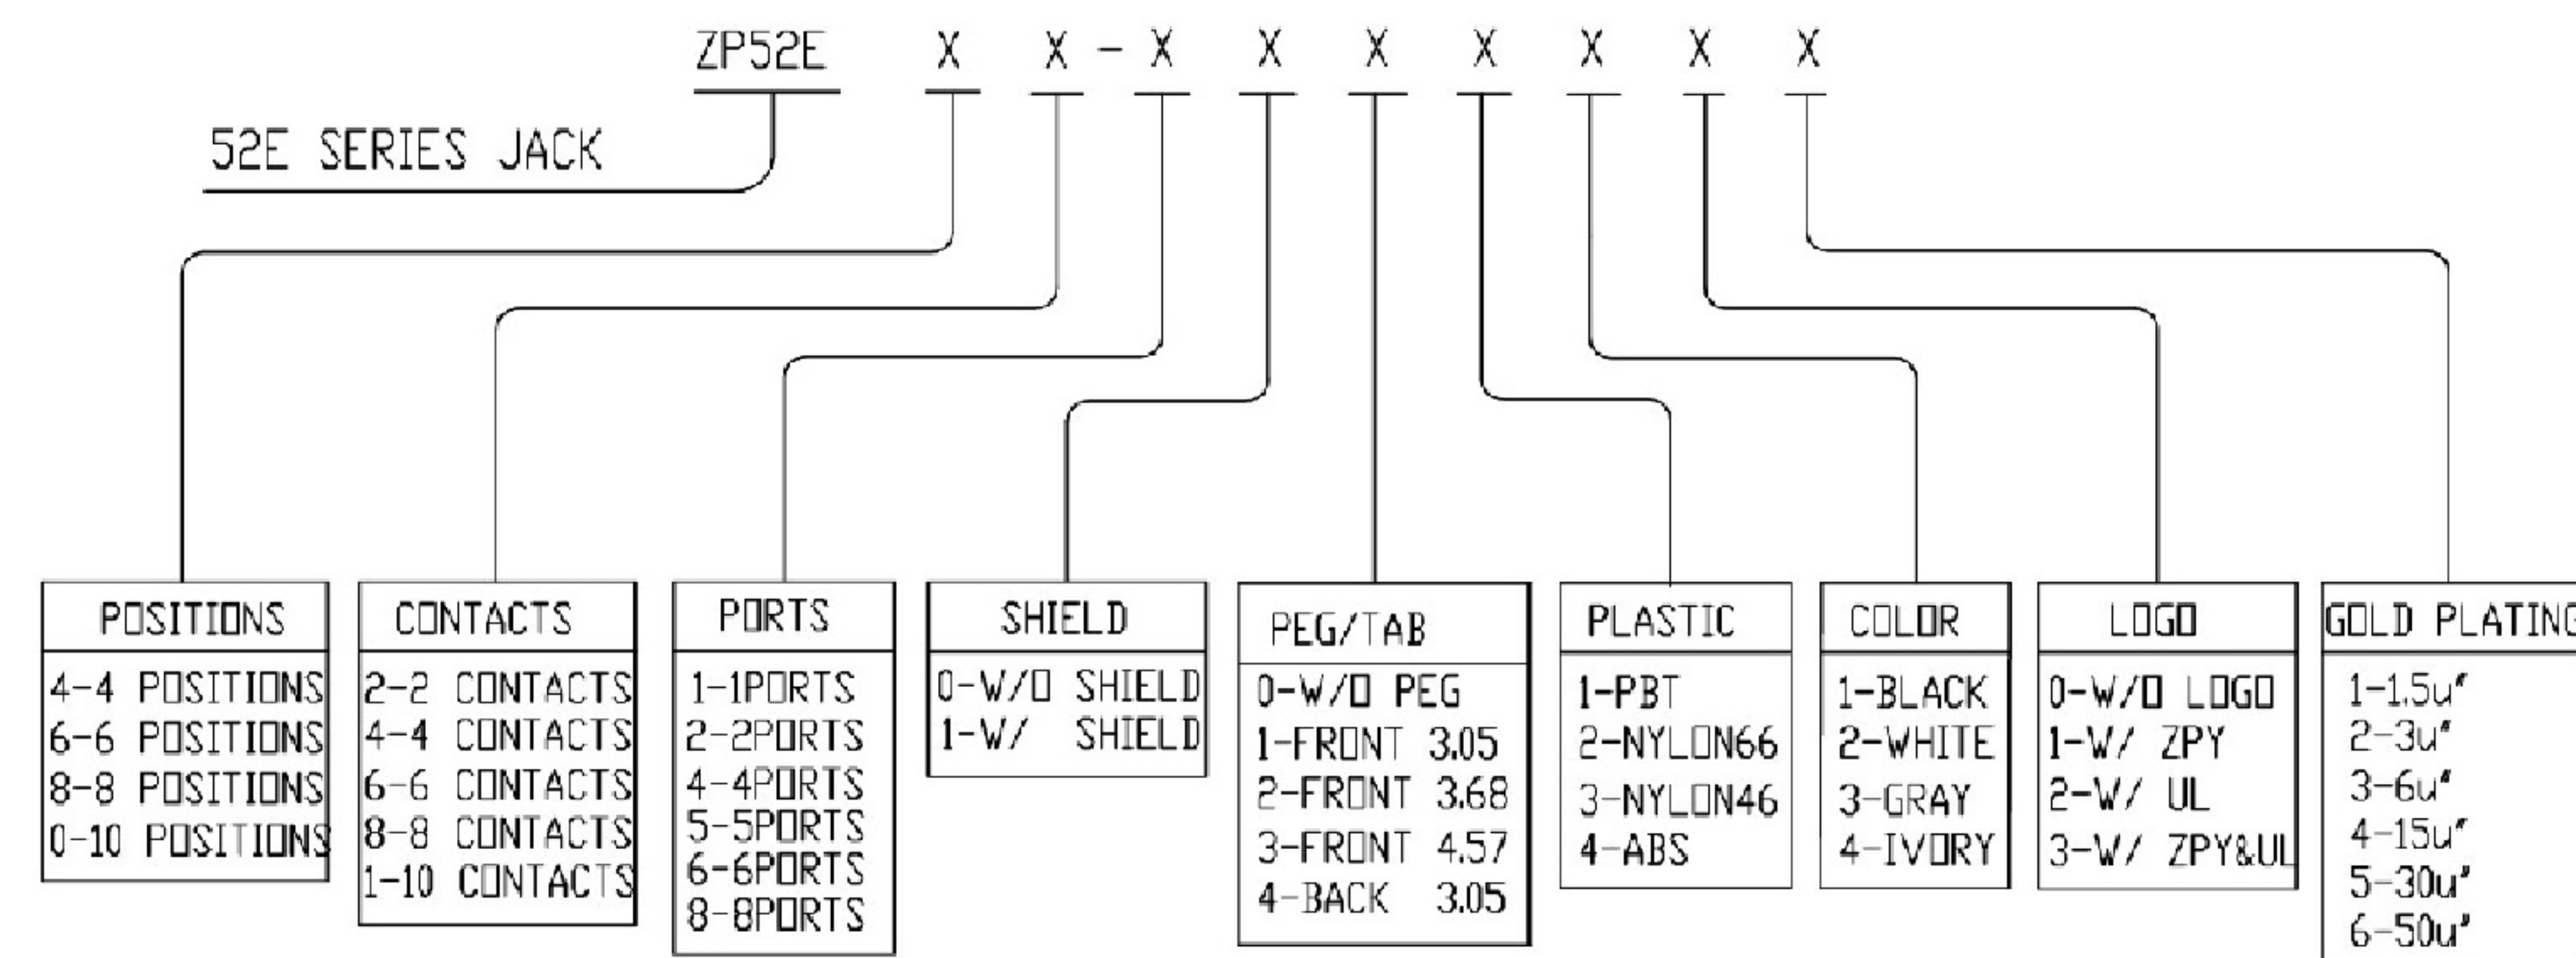

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

Address: China, Dongguan City, Guangdong Province, Huang Jiang
TLE: 0769-82055138 0769-82056828
E-mail: XB@ALPSR.CN E-mail: CN@ALPSR.CN
Website: www.alpsr.cn www.alpsr.com

TITLE:
RJ45

PART NO.:

REMARK:

SIZE
A4

SACLE
1:1

SHEET
1/2

UNITS
MM[INCH]

REV
A0

GENERAL TOLERANCES
UNLESS SPECIFIED

$x \pm 0.35$

$x \pm 0.30$

$.xx \pm 0.25$

$.xxx \pm 0.10$

$x^\circ \pm 3.0^\circ$

$.x^\circ \pm 2.0^\circ$

$.xx^\circ \pm 1.5^\circ$

$.xxx^\circ \pm 1.0^\circ$

APPROVED BY:
JP.Gong

CHECKED BY:
TW.Xu

DESIGND BY:
ZG.Hu