


RoHS

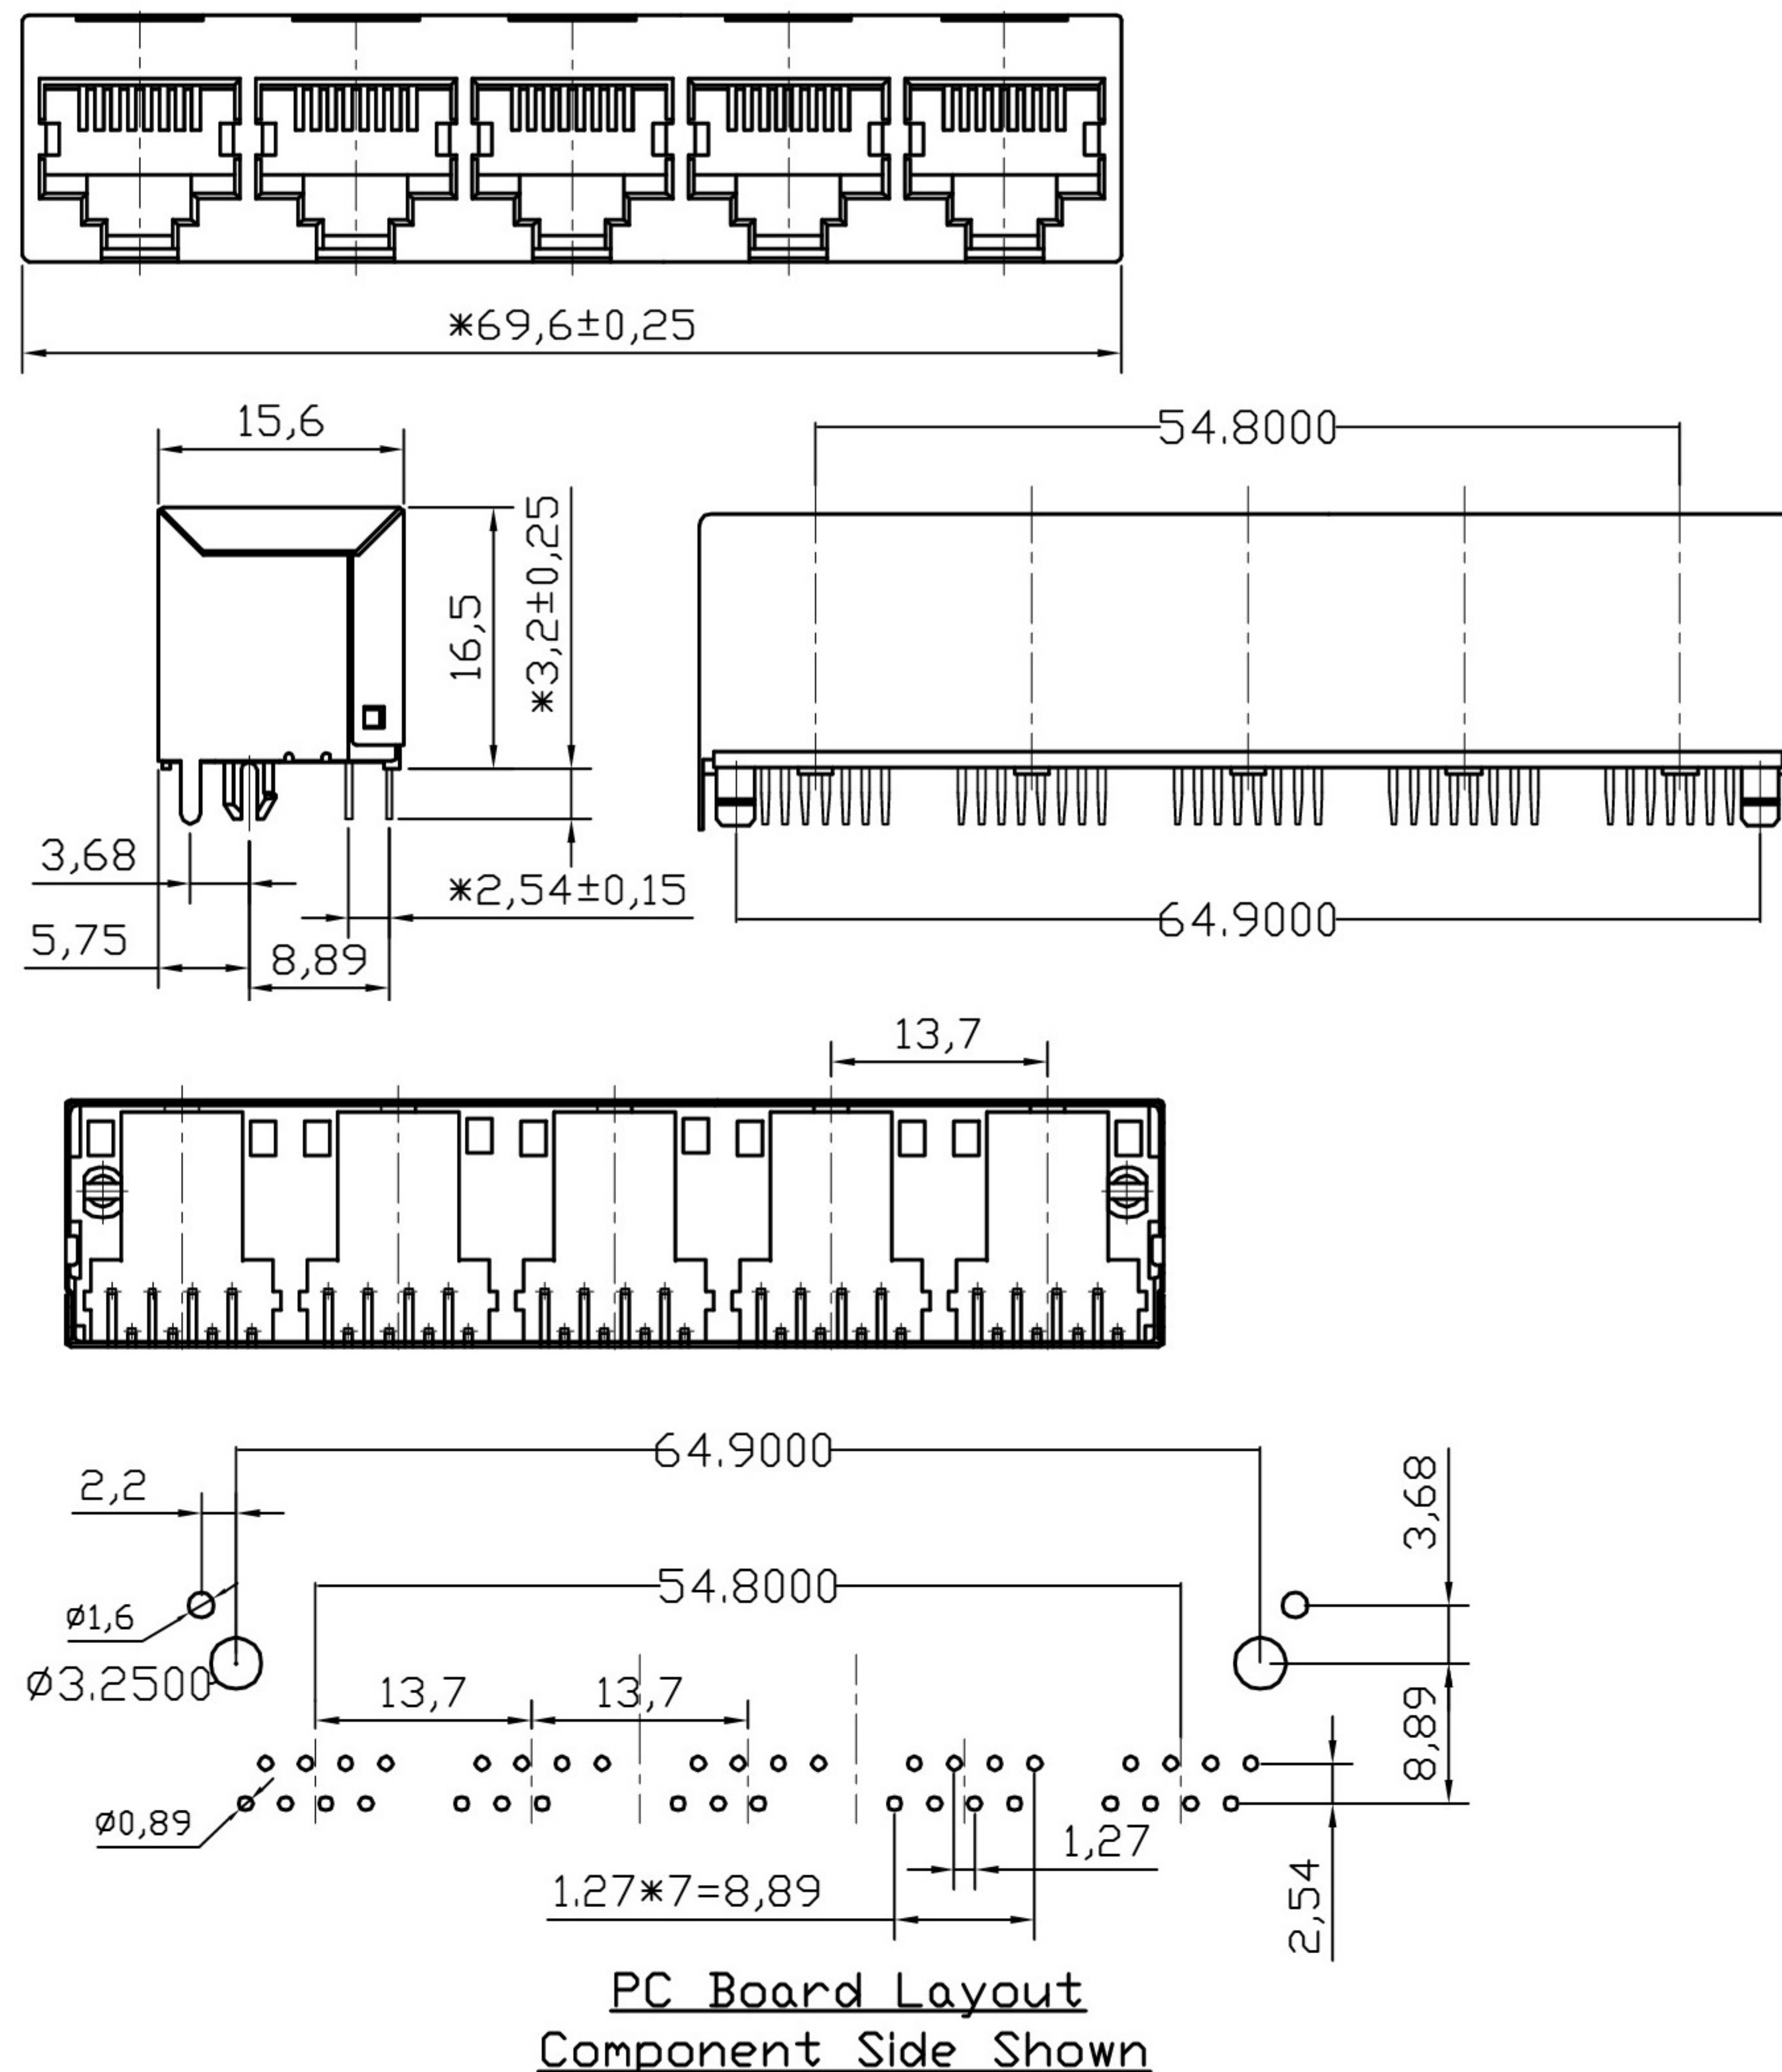

NOTES:

MATERIAL:

1. HOUSING MATERIAL : GLASS FILLED POLYESTER UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE $t=0.30\text{mm}$.
3. PLATING : SELECTING GOLD PLATING $3\mu\sim 50\mu$ OVER NICKEL IN CONTACT AREA. 150μ TIN PLATING OVER NICKEL IN SOLDER AREA

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500V DC .
5. DIELECTRIC WITHSTANDING RESISTANCE : 1000V AC RMS 50Hz. 1MIN.


MECHANICAL:

1. DURRABILITY : 750 CYCLES MIN.
2. PCB RETENTION PRE-SOLDER : 1 LB MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO 85°C .
2. OPERATION : 0°C TO 70°C .

PART NUMBER:

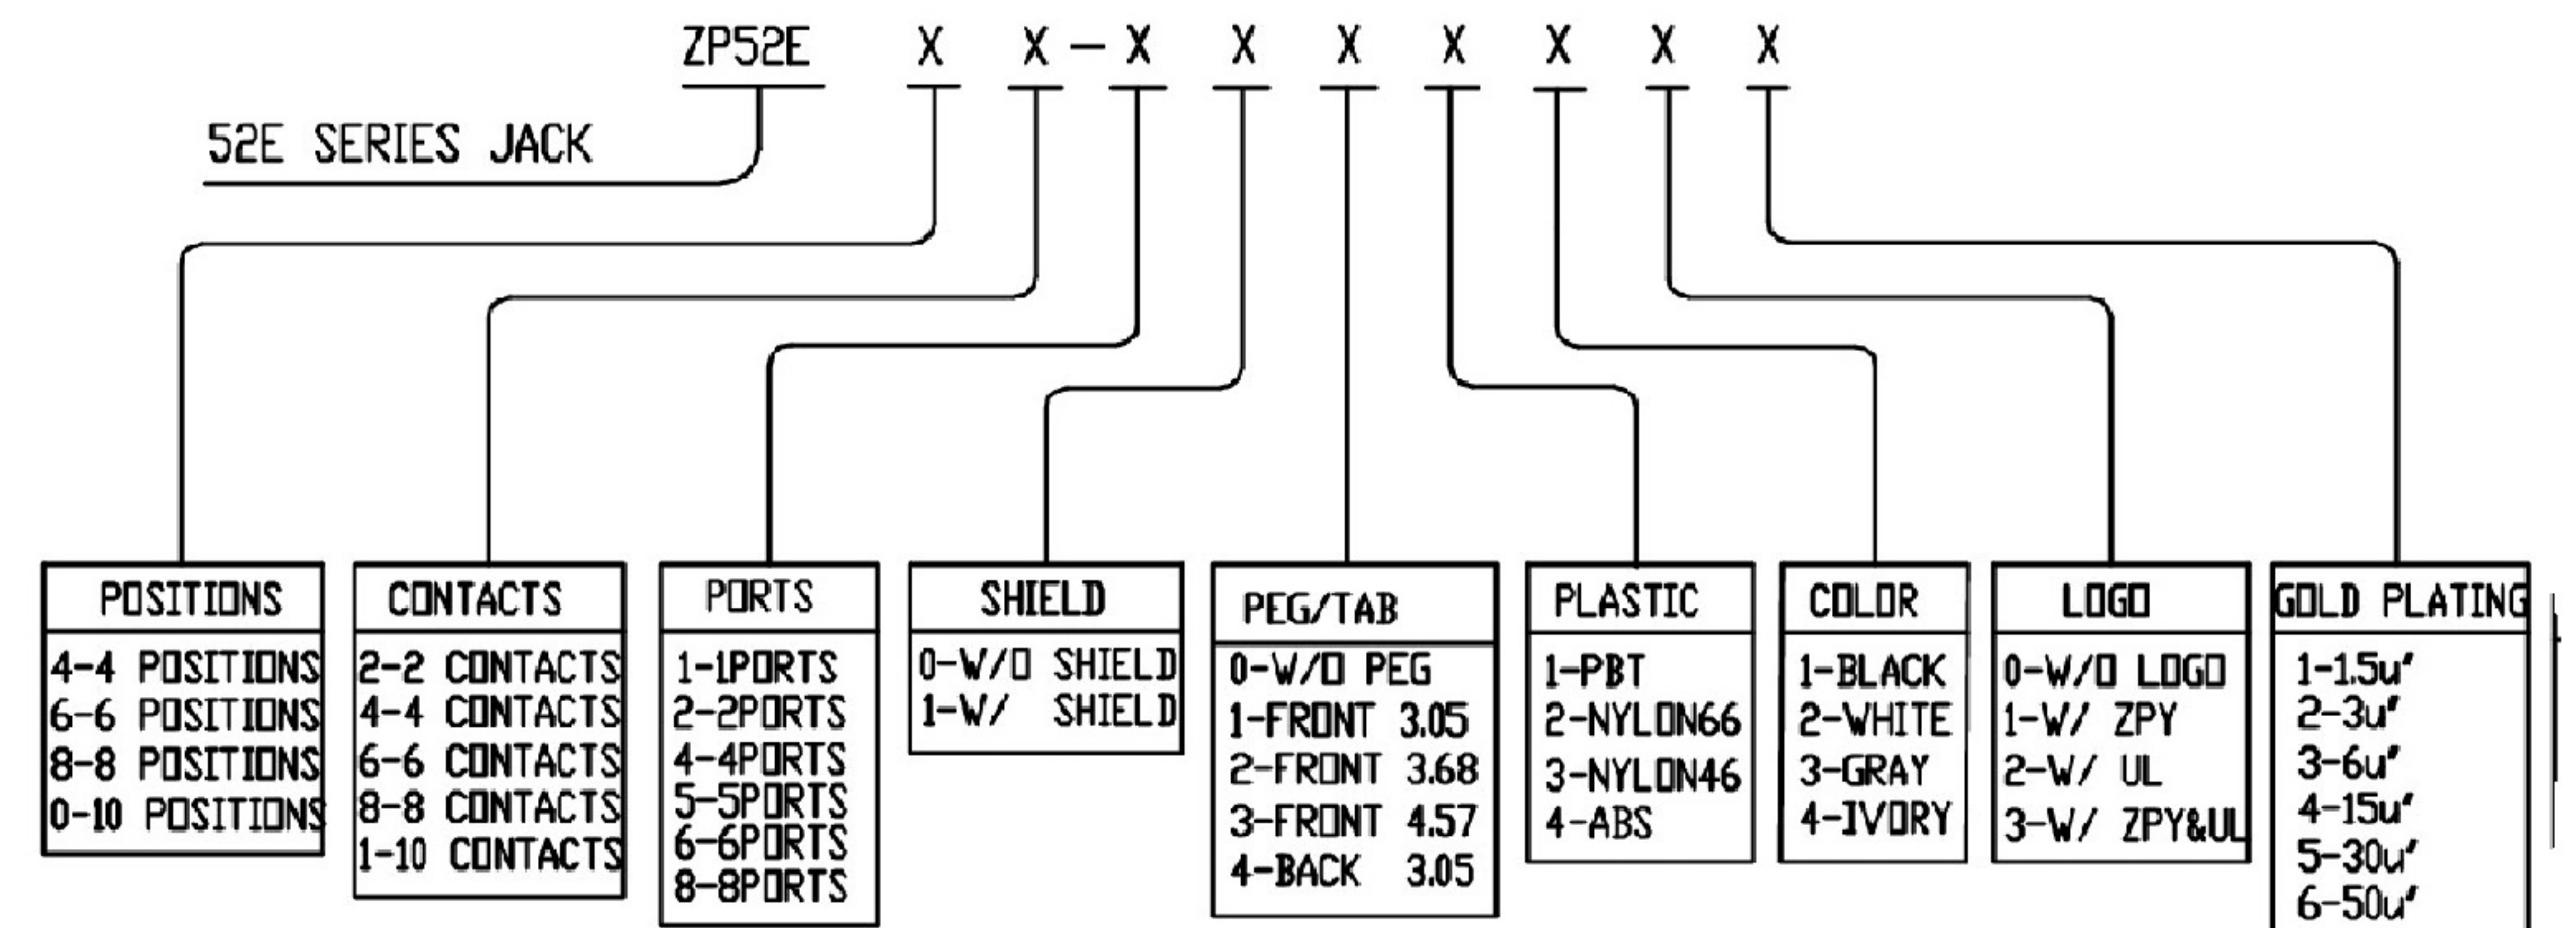

东莞市溪榜电子有限公司
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD

Address: China, Dongguan City, Guangdong Province, Huang Jiang
TLE: 0769-82055138 0769-82056828
E-mail: XB@ALPSR.CN E-mail: CN@ALPSR.CN
Website: www.alpsr.cn www.alpsr.com

TITLE: RJ45	SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: JP.Gong
PART NO.:	SACLE 1:1	REV A0	$x \pm 0.35$	$x^{\circ} \pm 3.0^{\circ}$	CHECKED BY: TW.Xu
REMARK:	SHEET 1/2		$.xx \pm 0.25$	$.xx^{\circ} \pm 1.5^{\circ}$	DESIGND BY: ZG.Hu
			$.xxx \pm 0.10$	$.xxx^{\circ} \pm 1.0^{\circ}$	