
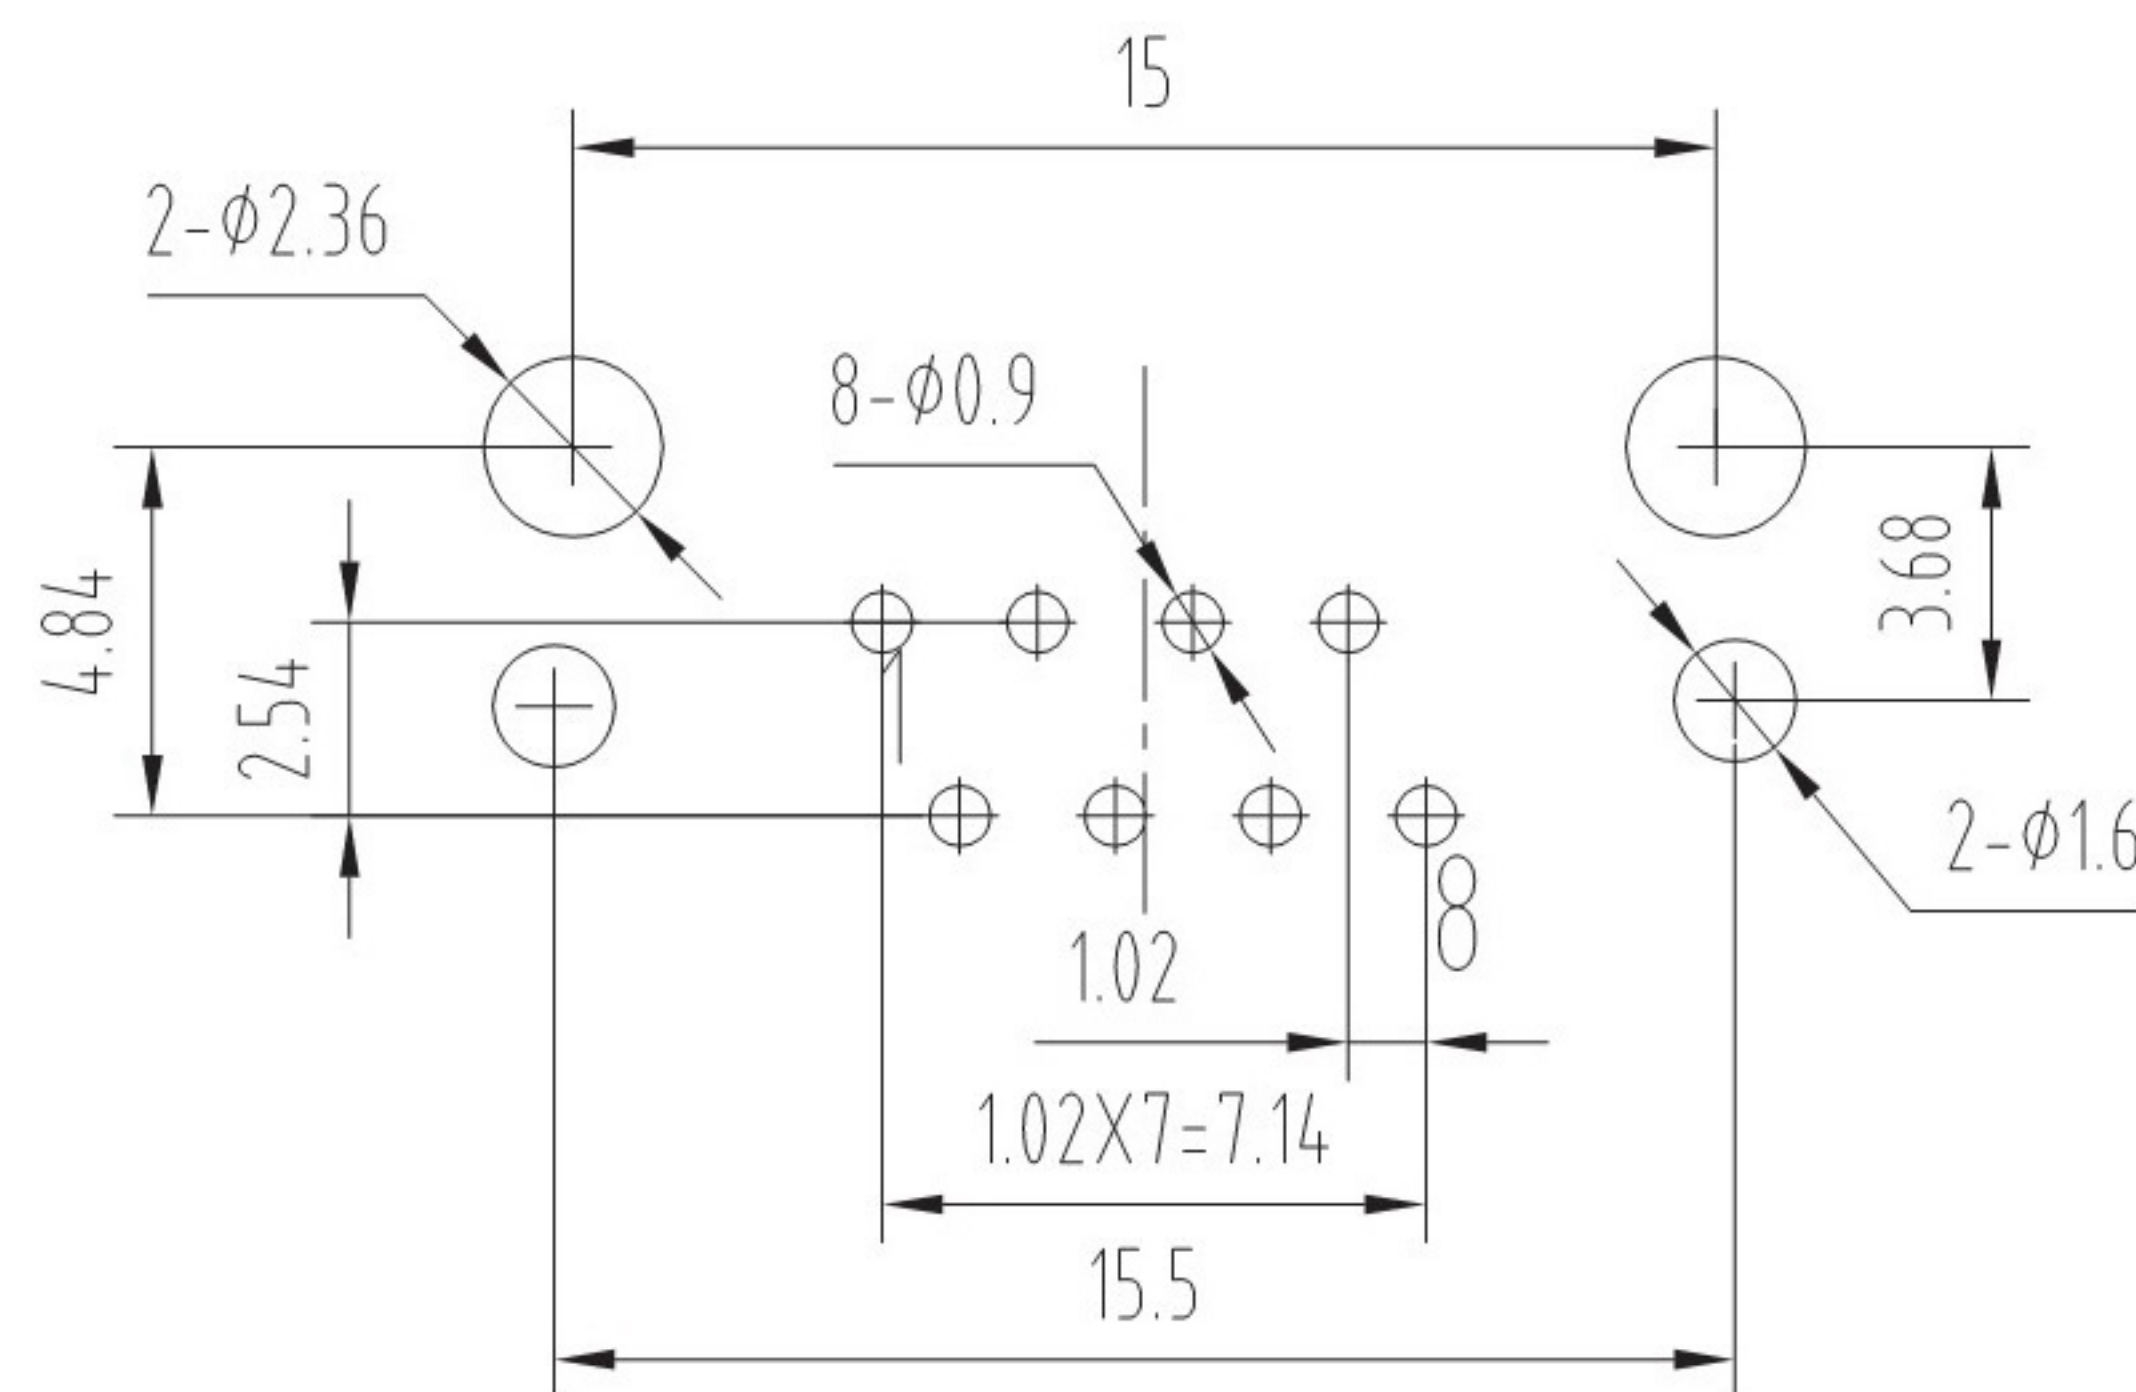
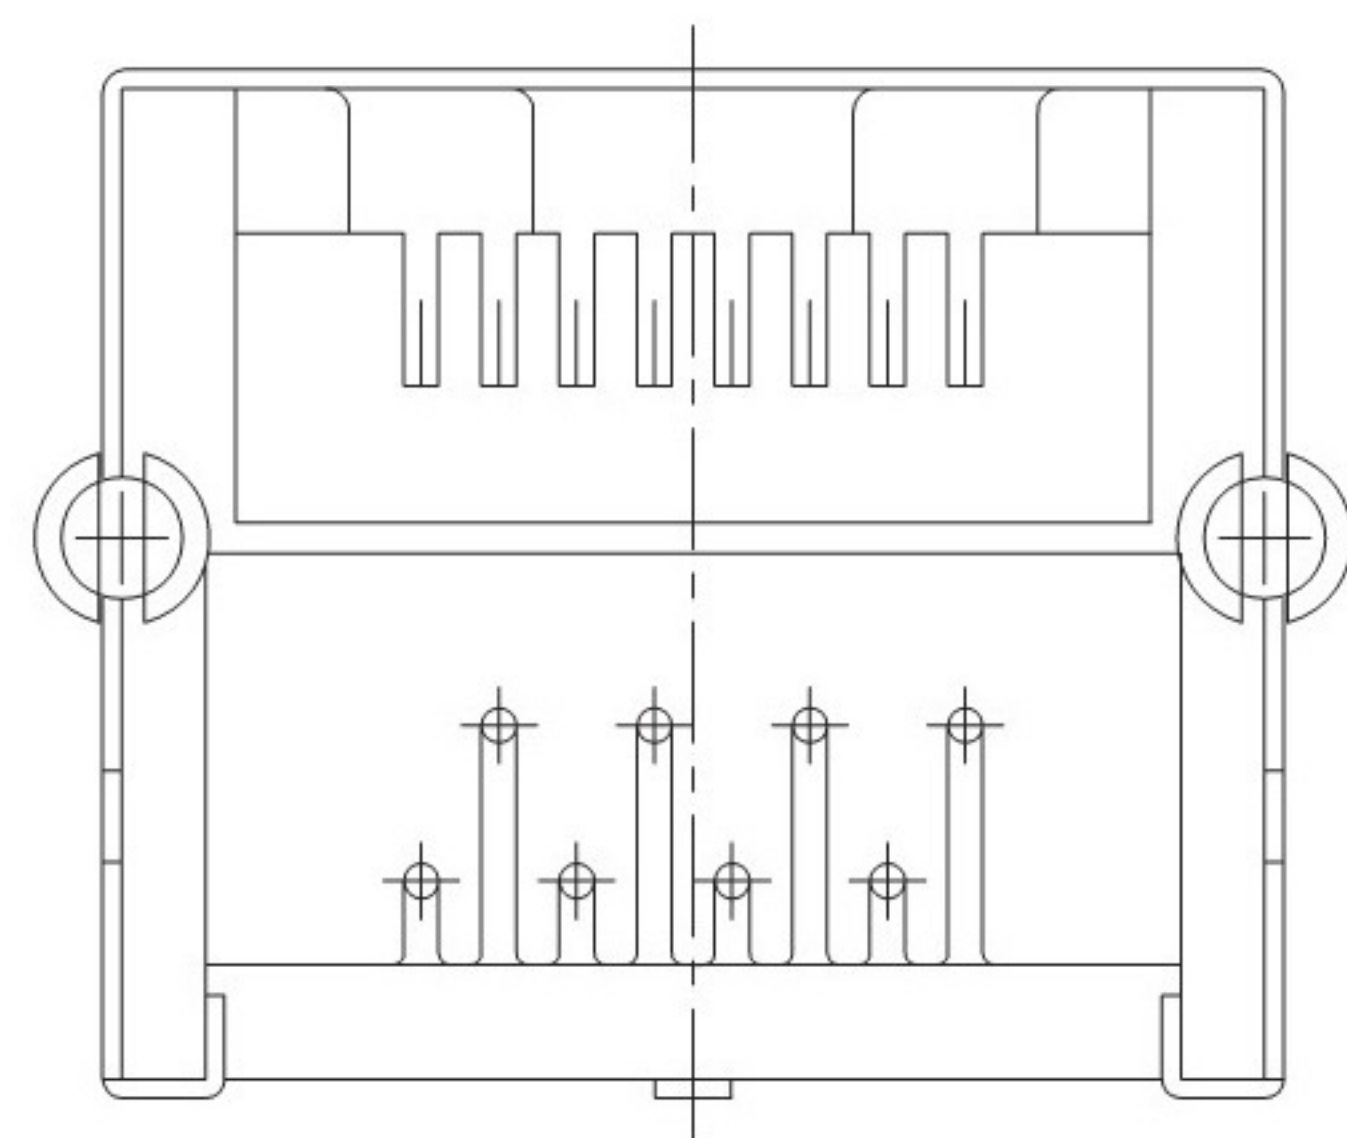
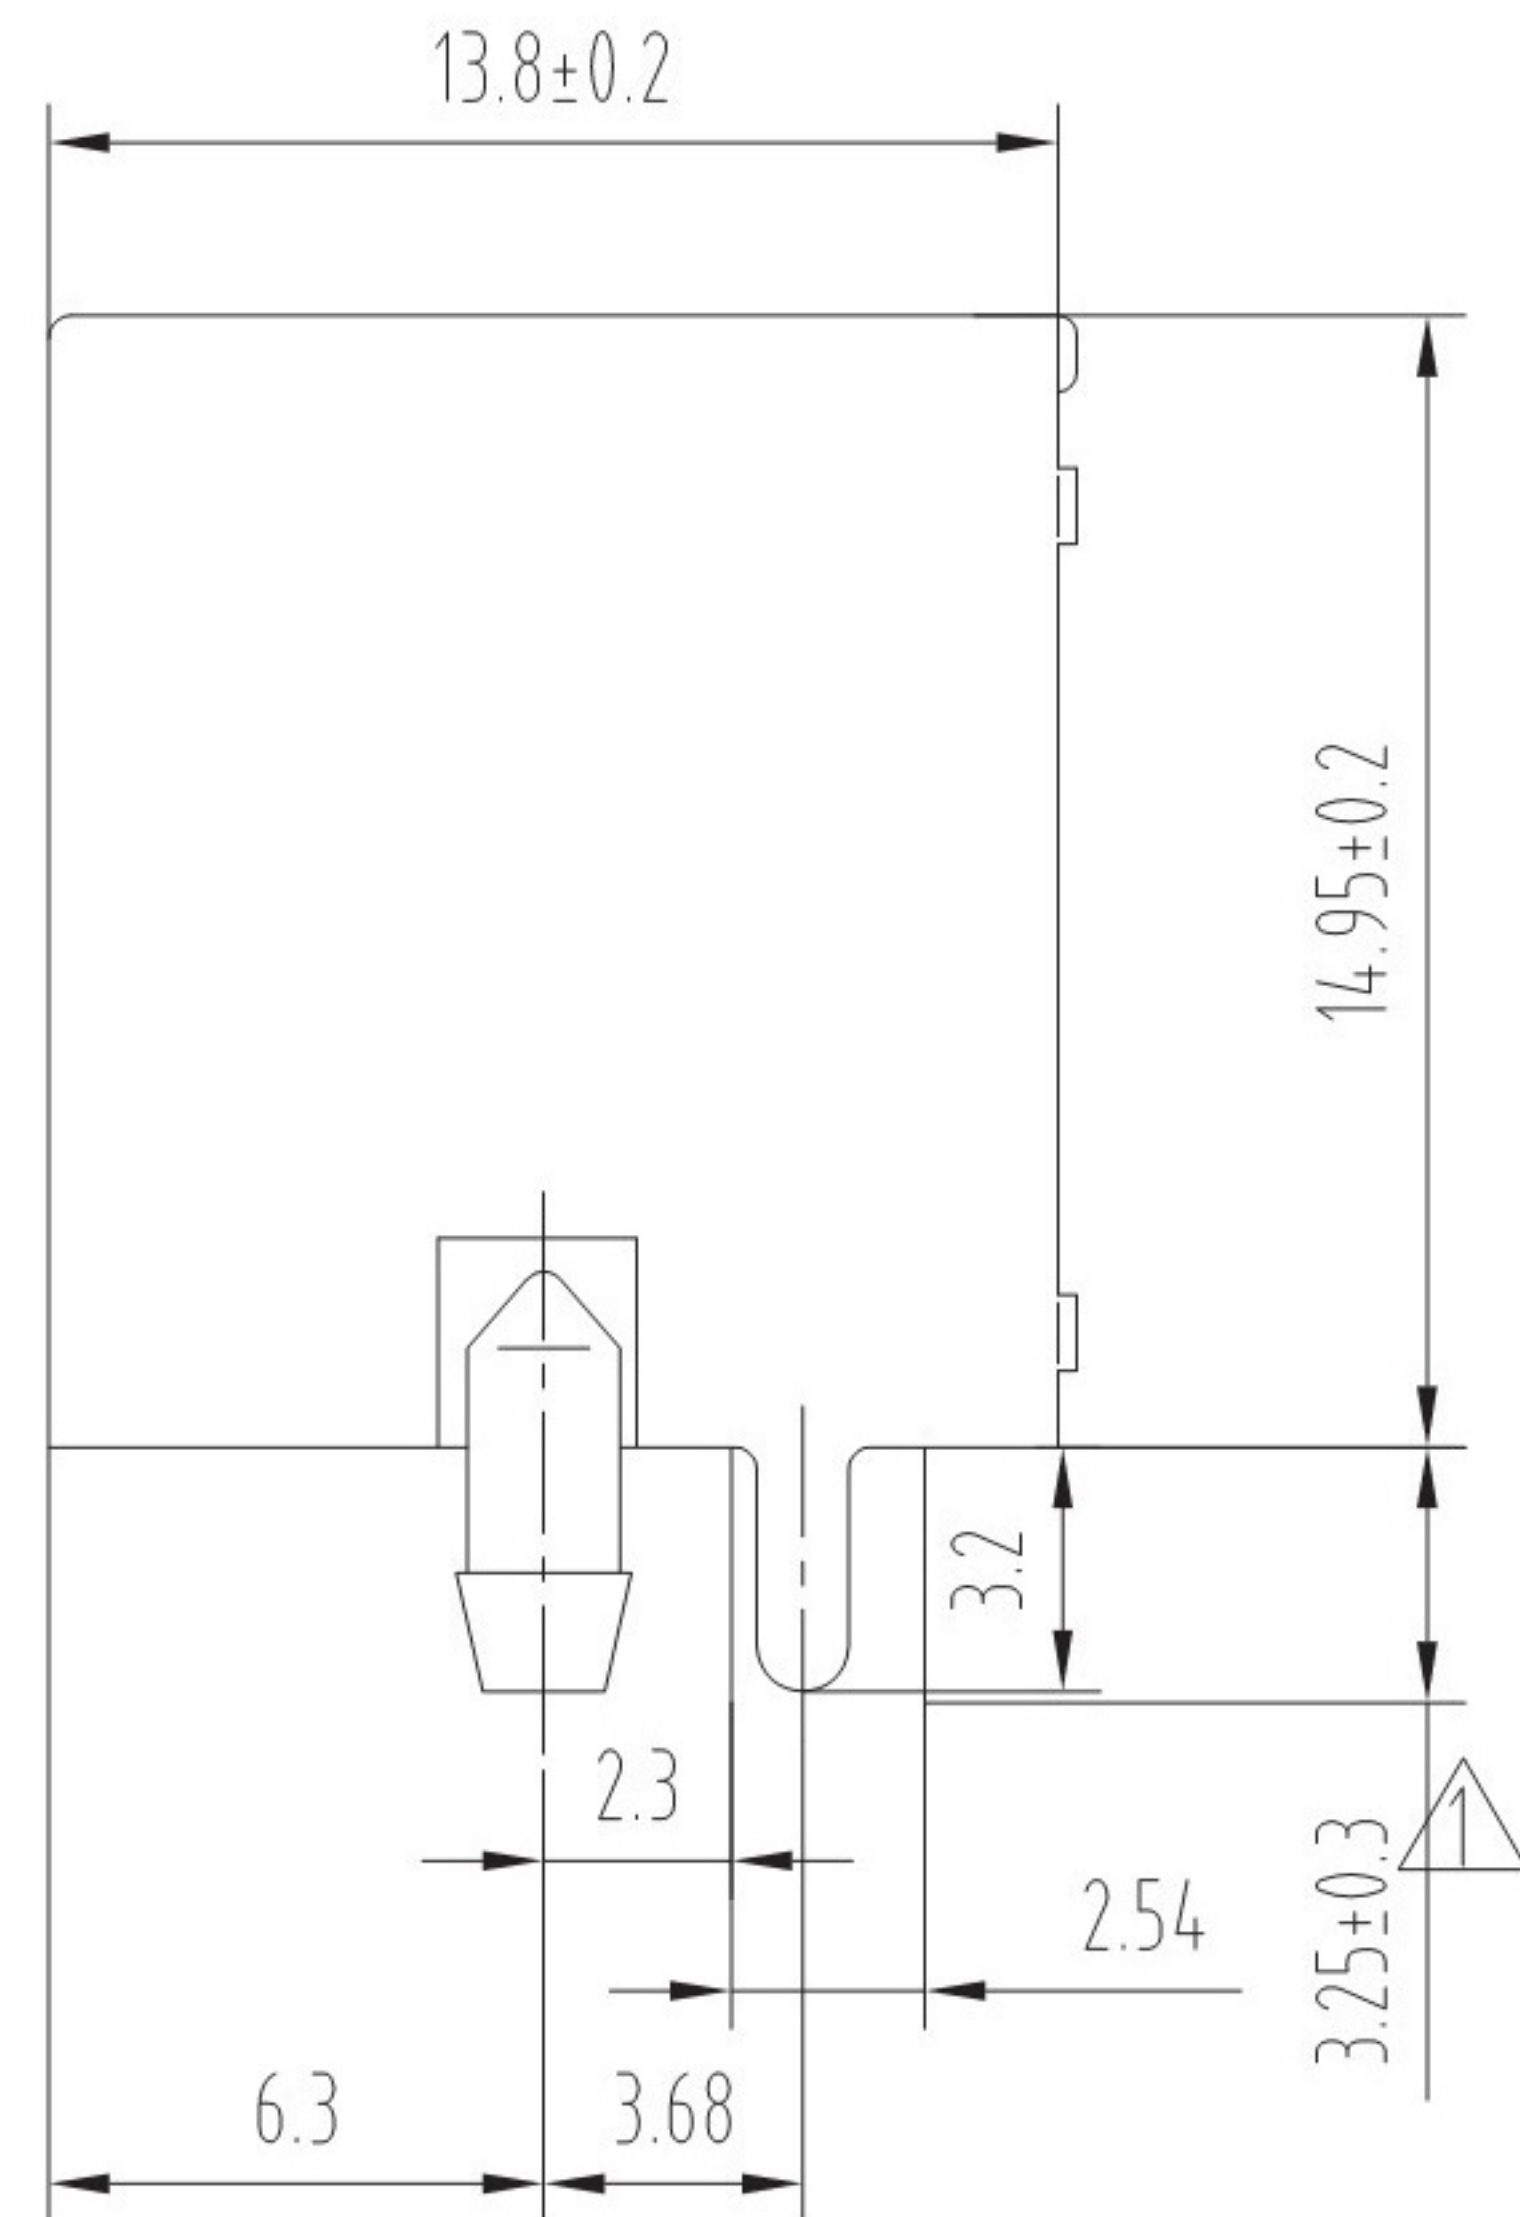


RoHS

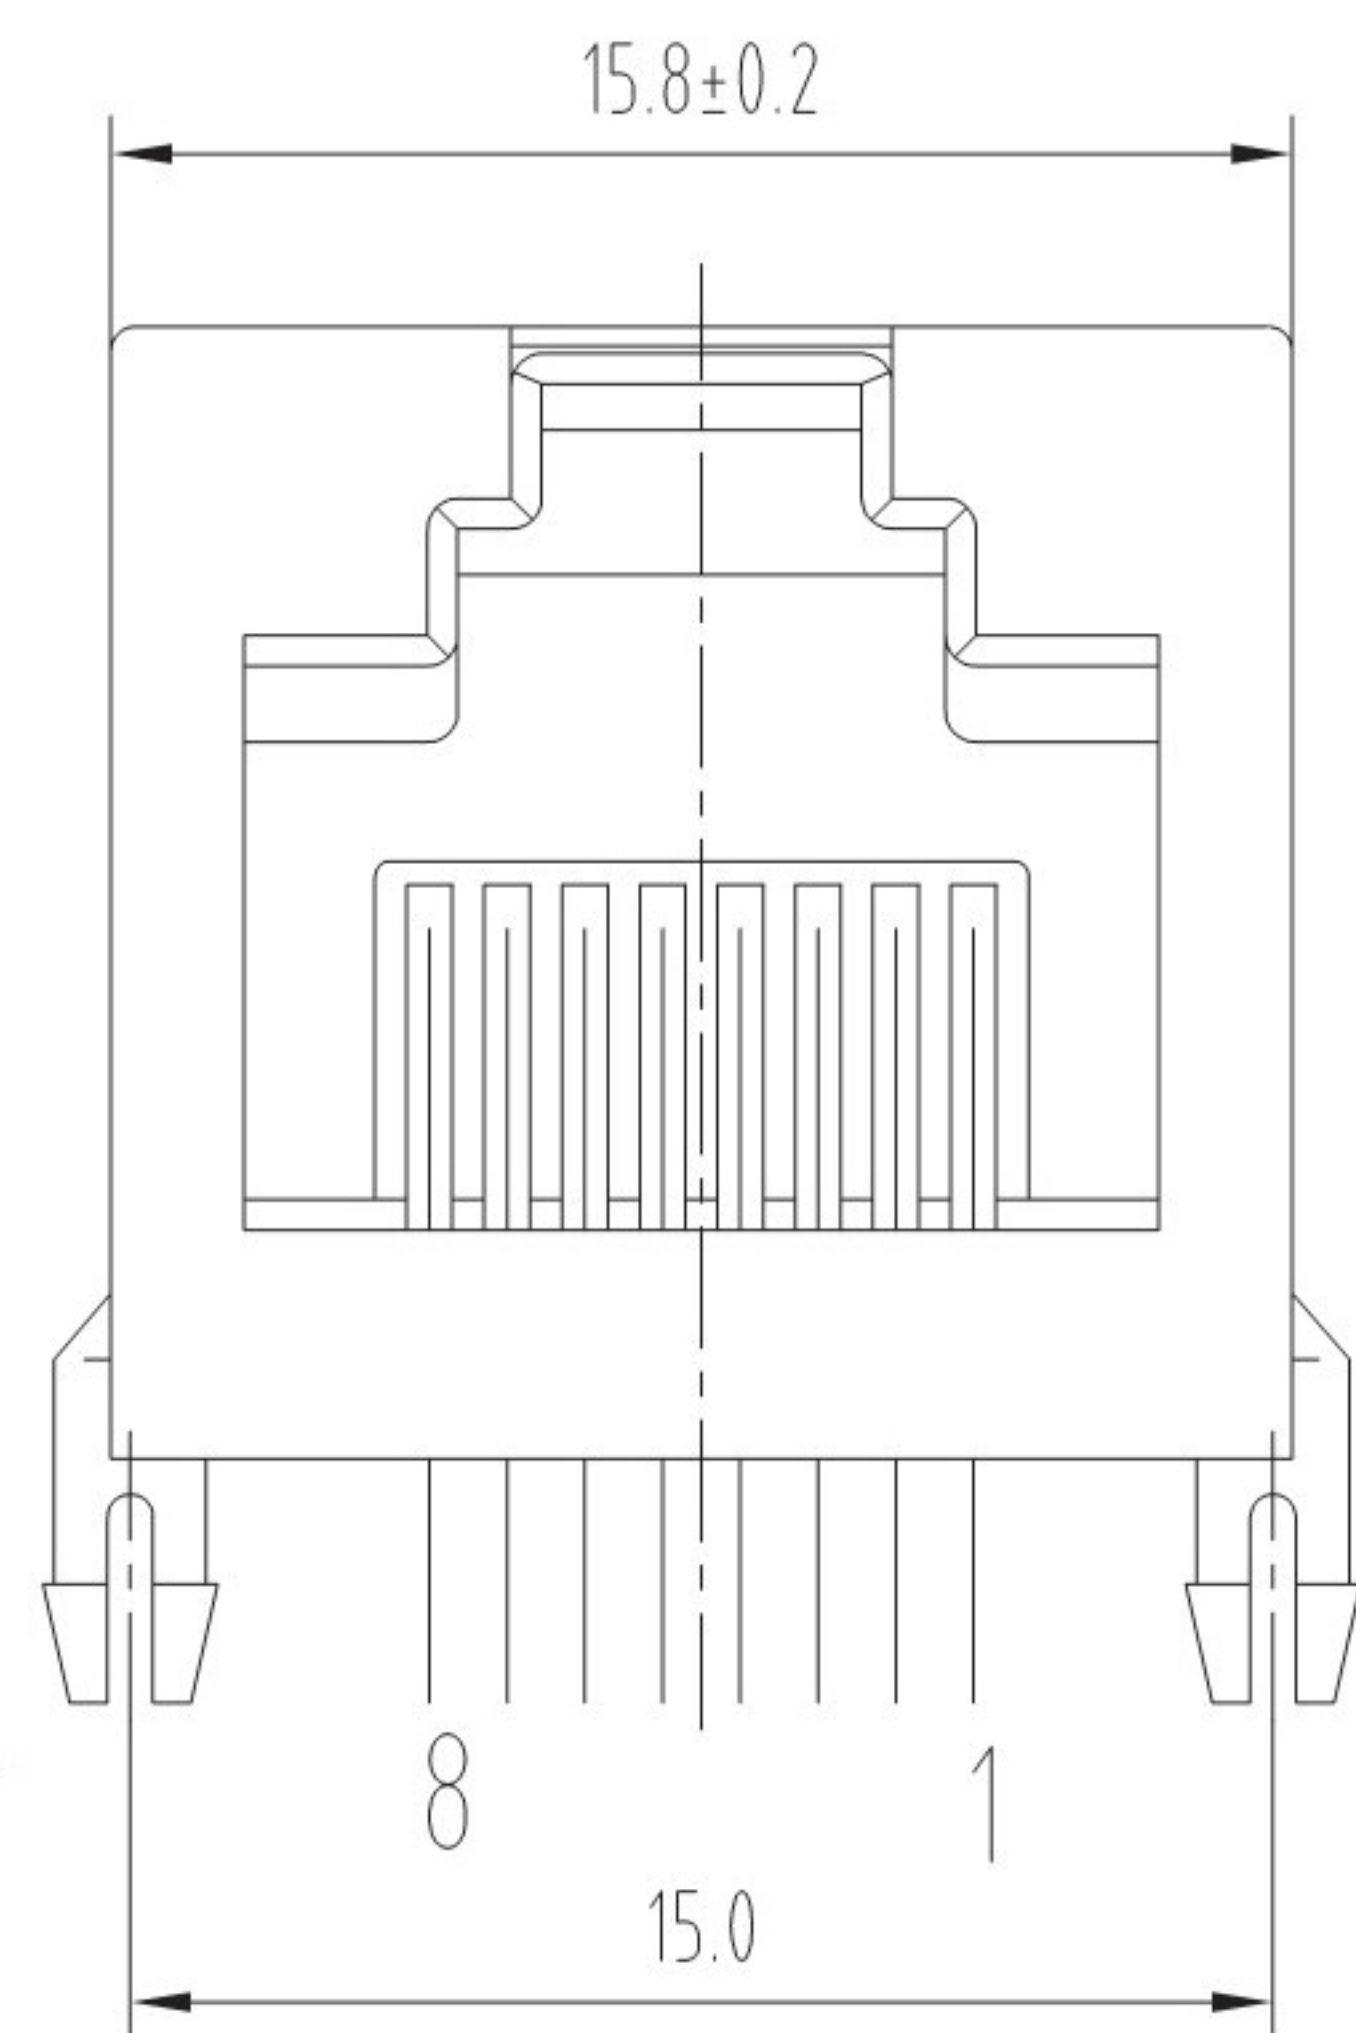

PC Board Layout

Component Side Shown

NOTES:

MATERIAL:

- | | |
|--------------------|--|
| 1.HOUSING MATERIAL | :GLASS FILLED POLYESTER UL94V-0. |
| 2.CONTACT MATERIAL | :PHOSPHOR BRONZE $\phi 0.46\text{mm}$. |
| 3.PLATING | :GOLD PLATING OVER NICKEL. |
| 4.SHIELD | :0.23mm THICKNESS COPPER ALLOY WITH NICKEL PLATED. |

ELECTRICAL:

- | | |
|--------------------------------------|-----------------------------|
| 1.VOLTAGE RATING | :125 VAC RMS. |
| 2.CURRENT RATING | :15 AMP. |
| 3.CONTACT RESISTANCE | :30 MIL OHMS MAX. |
| 4.INSULATION RESISTANCE | :500 MEGOHMS MIN @ 500V DC. |
| 5.DIELECTRIC WITHSTANDING RESISTANCE | :1000V AC RMS 50Hz. 1MIN. |


MECHANICAL:

- | | |
|----------------------------|-----------------|
| 1.DURABILITY | :750 CYCLES MIN |
| 2.PCB RETENTION PRE-SOLDER | :1.3 MIN. |

ENVIRONMENTAL:

- | | |
|-------------|---------------|
| 1.STORAGE | : -40°C~+85°C |
| 2.OPERATION | : 0°C TO 70°C |

PART NUMBER:

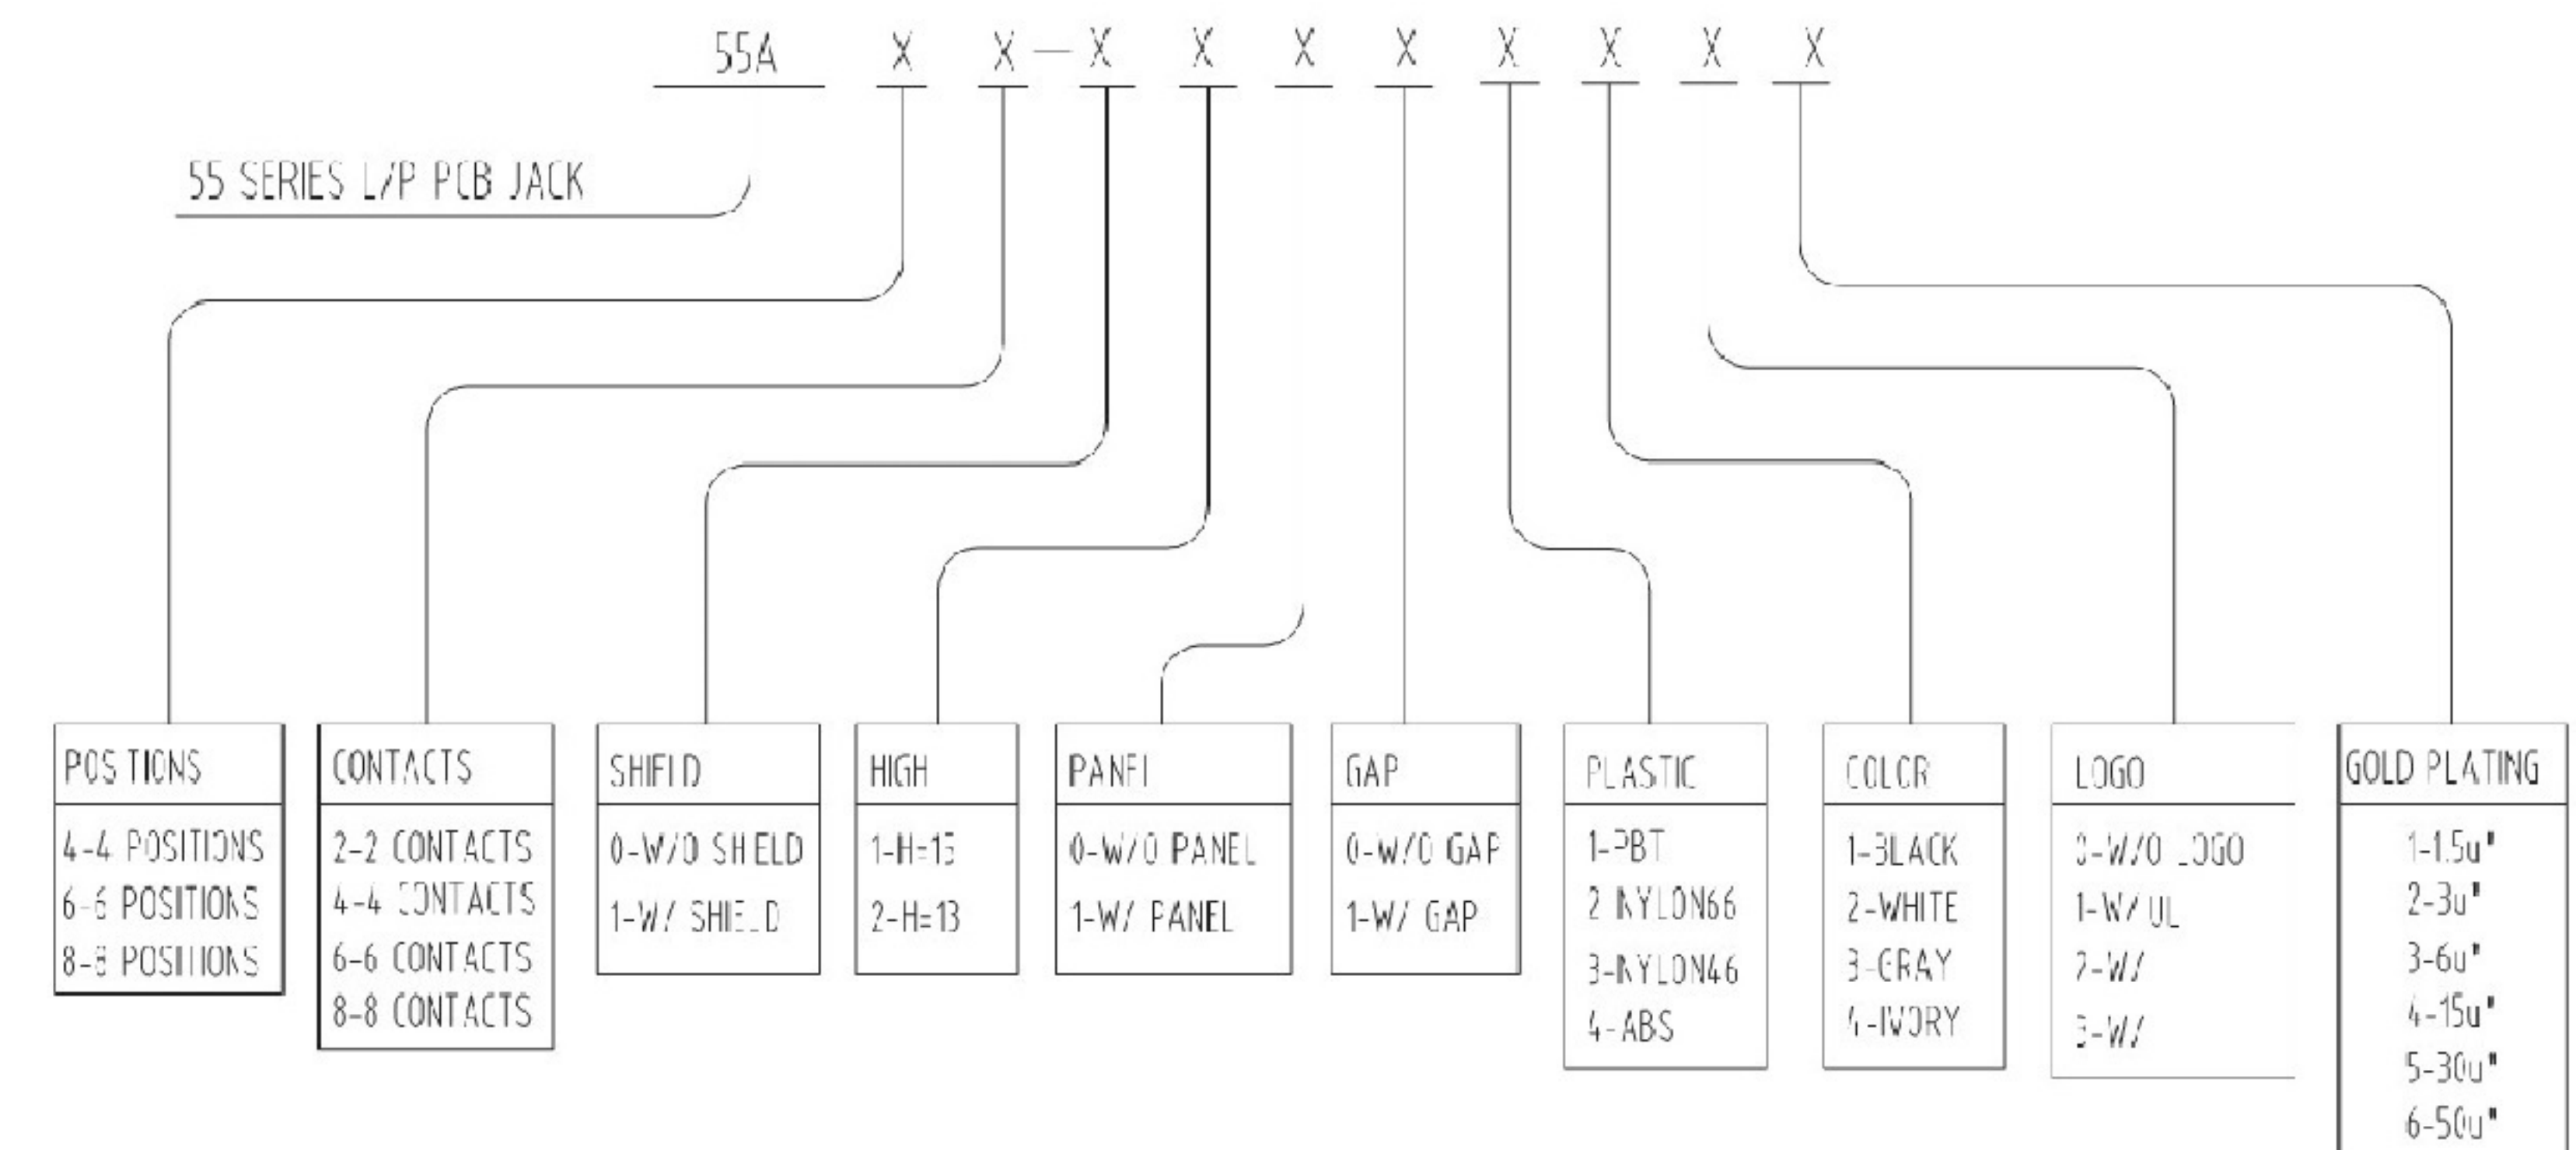

东莞市溪榜电子有限公司
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD

Address: China, Dongguan City, Guangdong Province, Huang Jiang
TLE: 0769-82055138 0769-82056828
E-mail: XB@ALPSR.CN E-mail: CN@ALPSR.CN
Website: www.alpsr.cn www.alpsr.com

TITLE:
RJ45

PART NO.:

REMARK:


SIZE
A4

SACLE
1:1

SHEET
1/2

UNITS
MM[INCH]

REV
A0

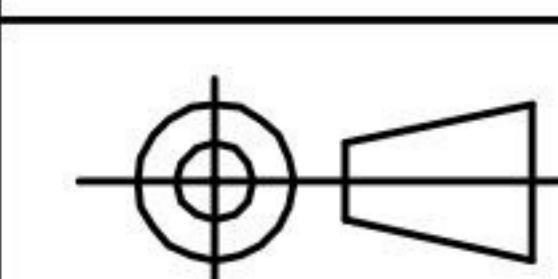

GENERAL TOLERANCES
UNLESS SPECIFIED

$x \pm 0.35$	$x^\circ \pm 3.0^\circ$
$.x \pm 0.30$	$.x^\circ \pm 2.0^\circ$
$.xx \pm 0.25$	$.xx^\circ \pm 1.5^\circ$
$.xxx \pm 0.10$	$.xxx^\circ \pm 1.0^\circ$

APPROVED BY:
JP.Gong

CHECKED BY:
TW.Xu

DESIGND BY:
ZG.Hu