
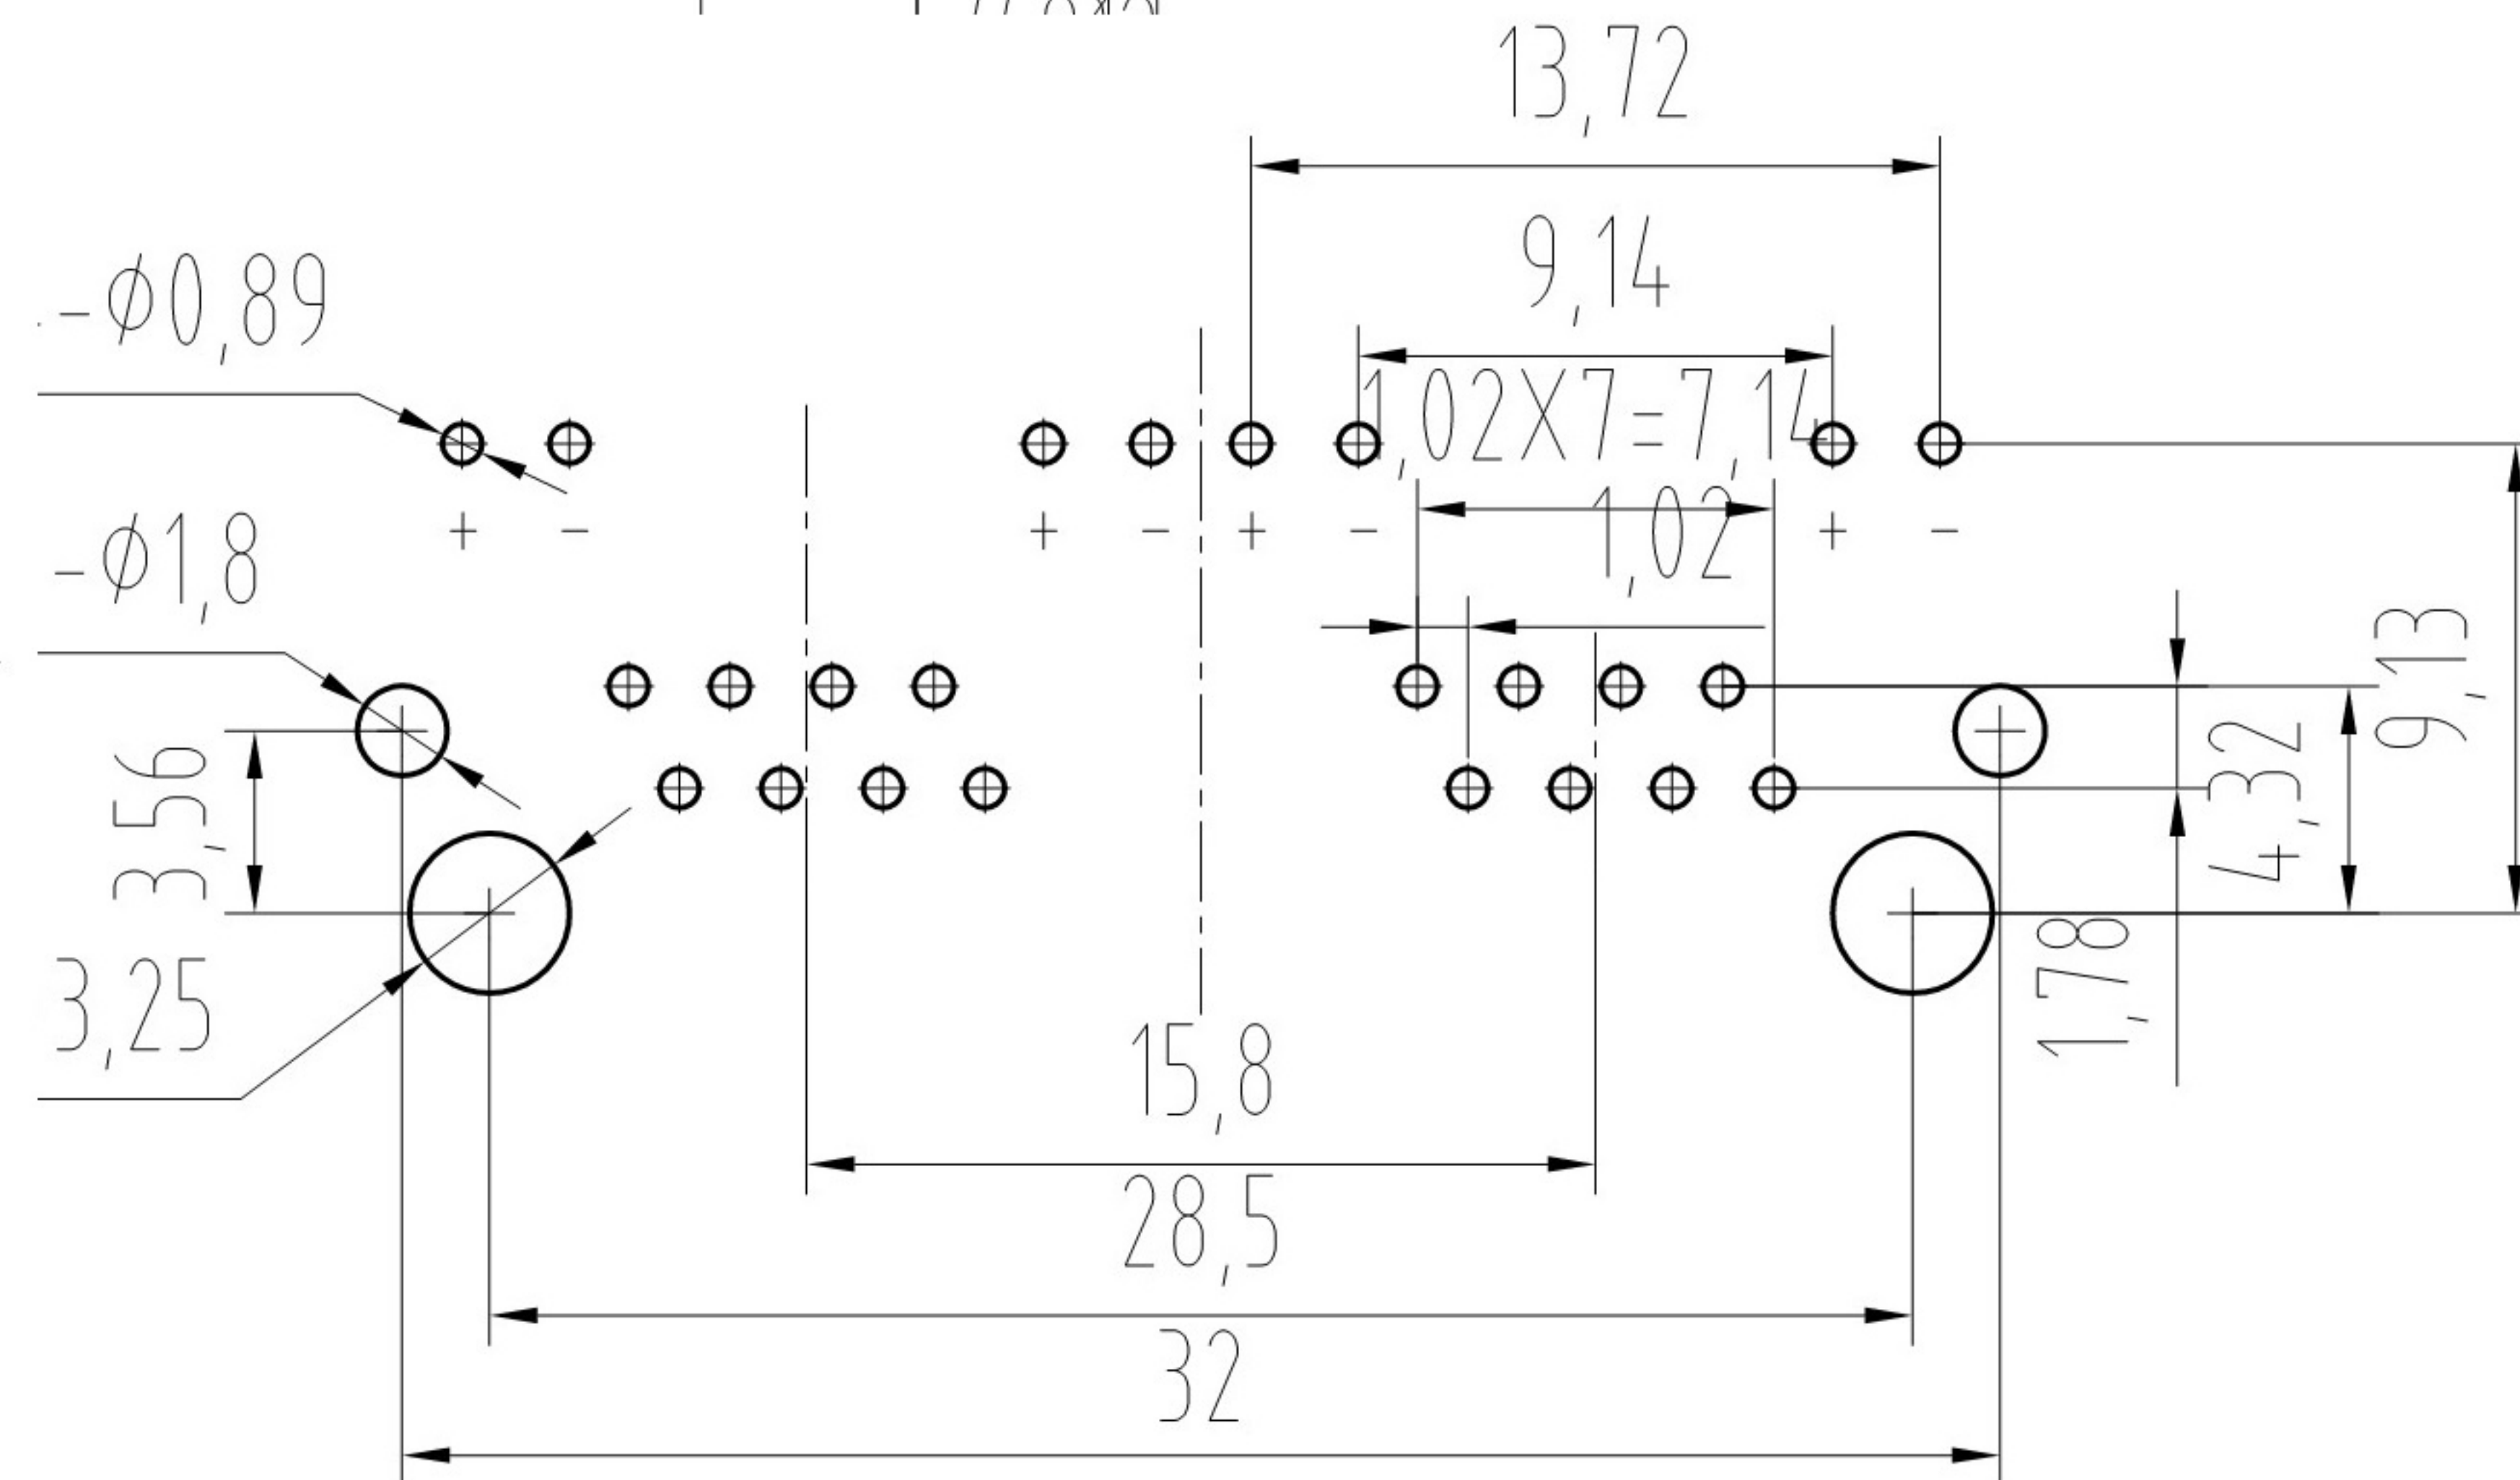
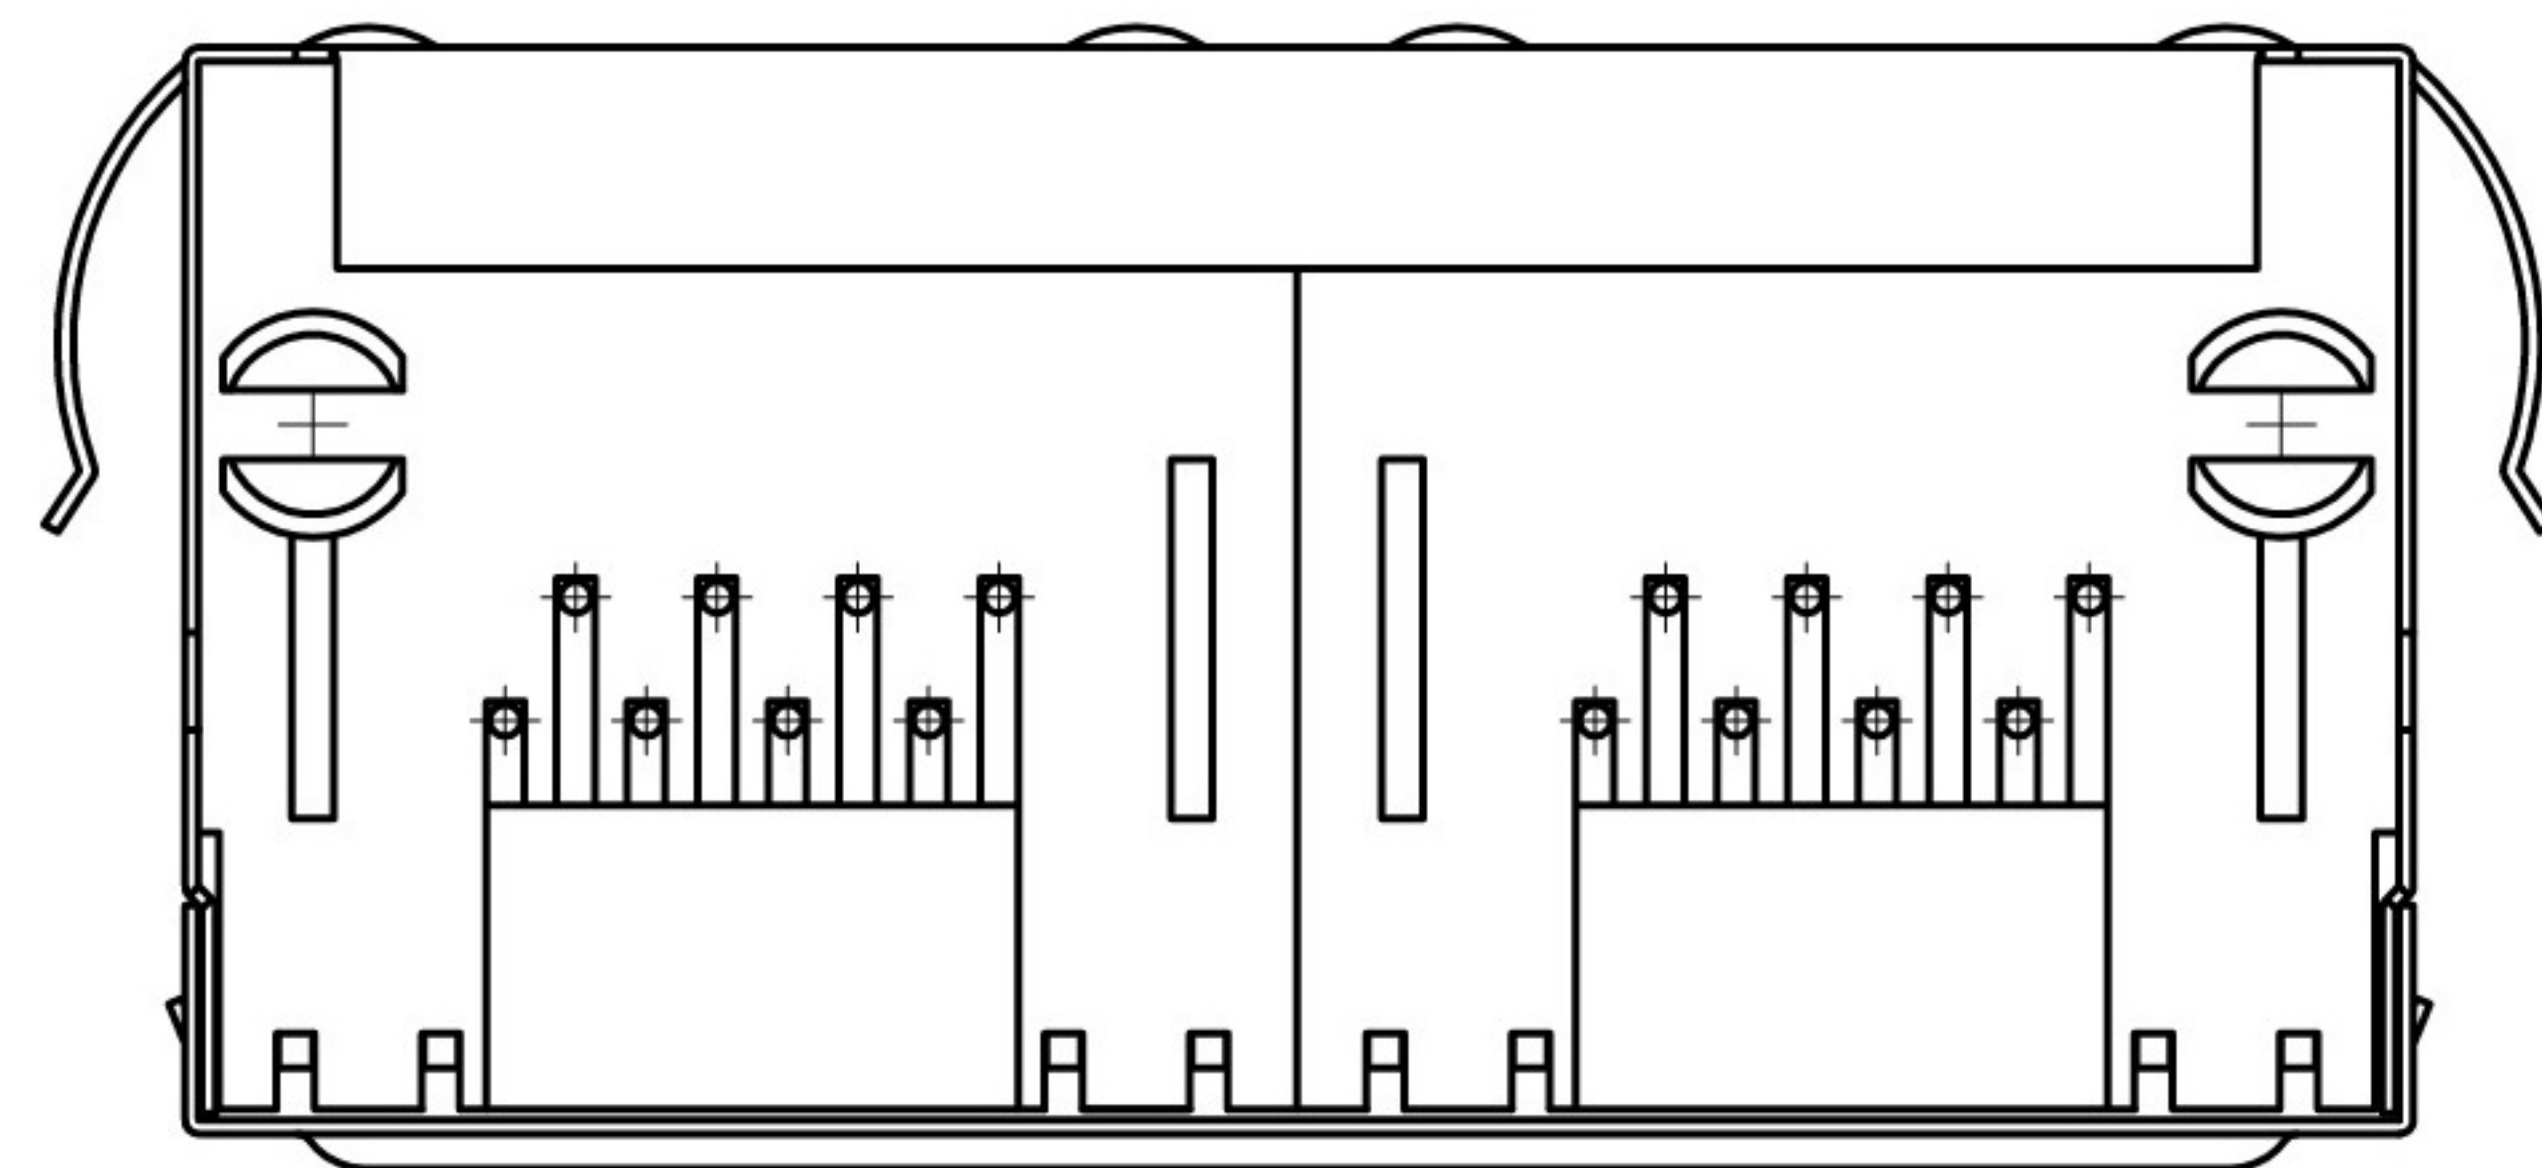
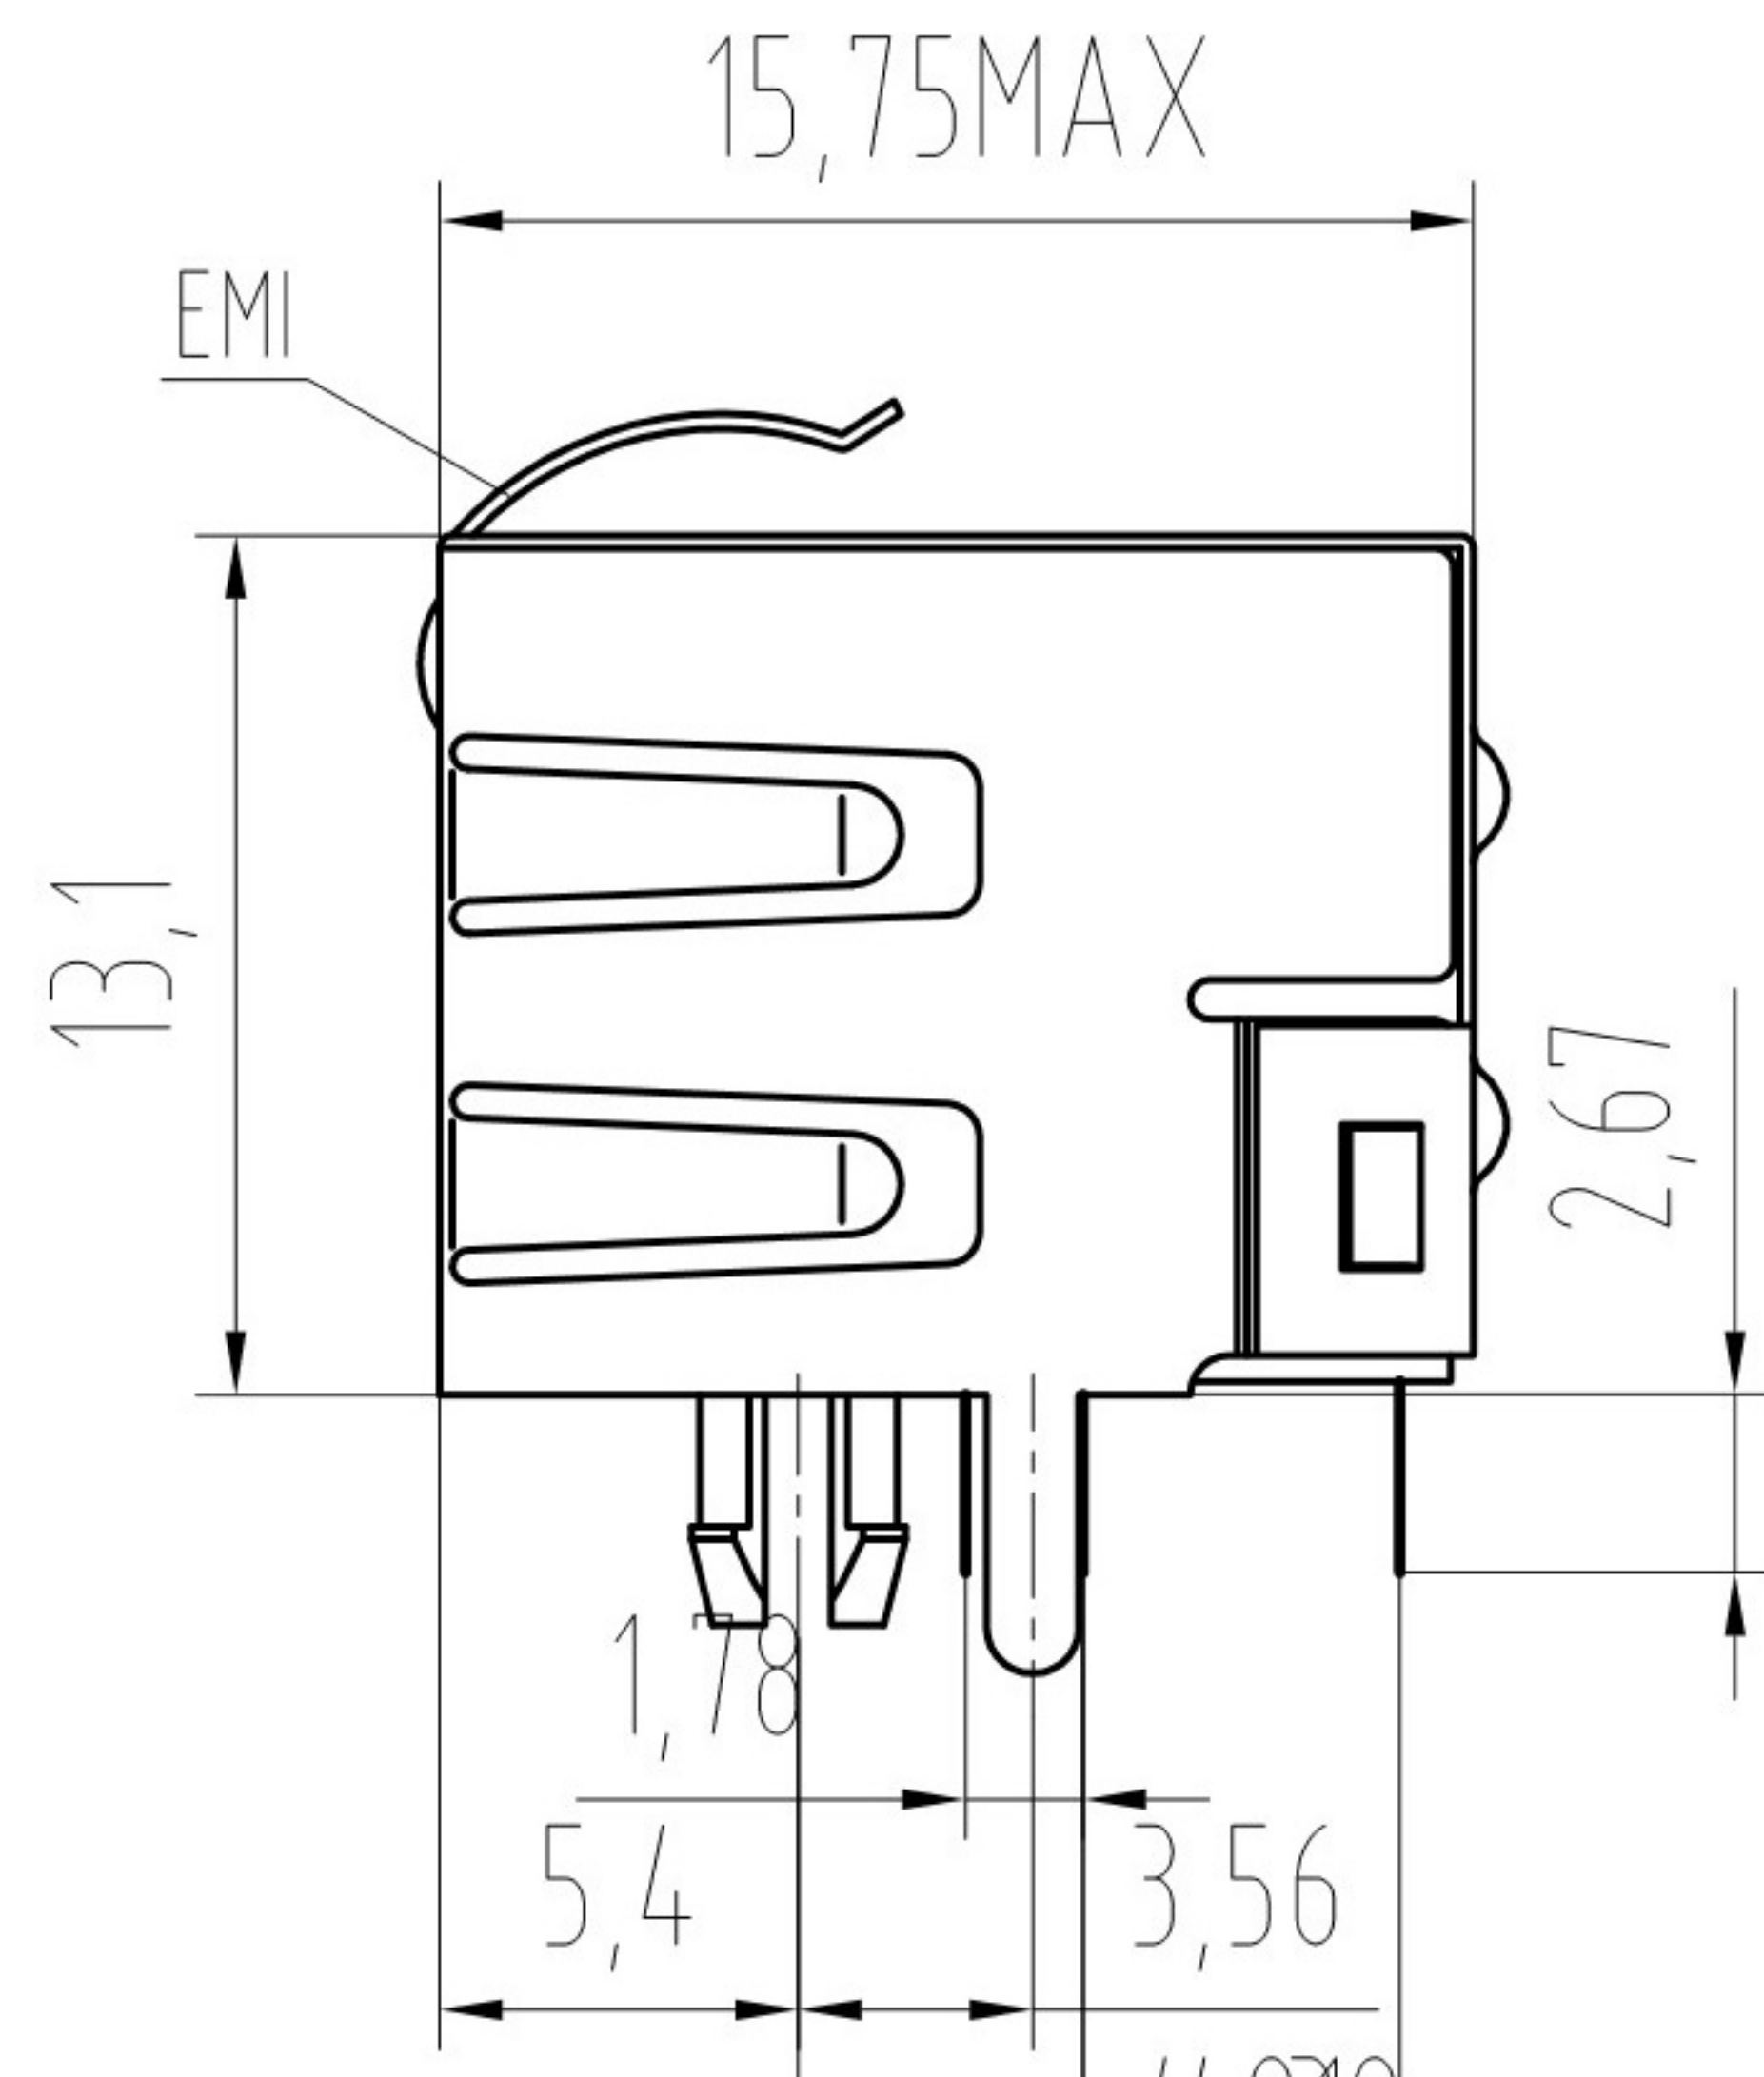


RoHS

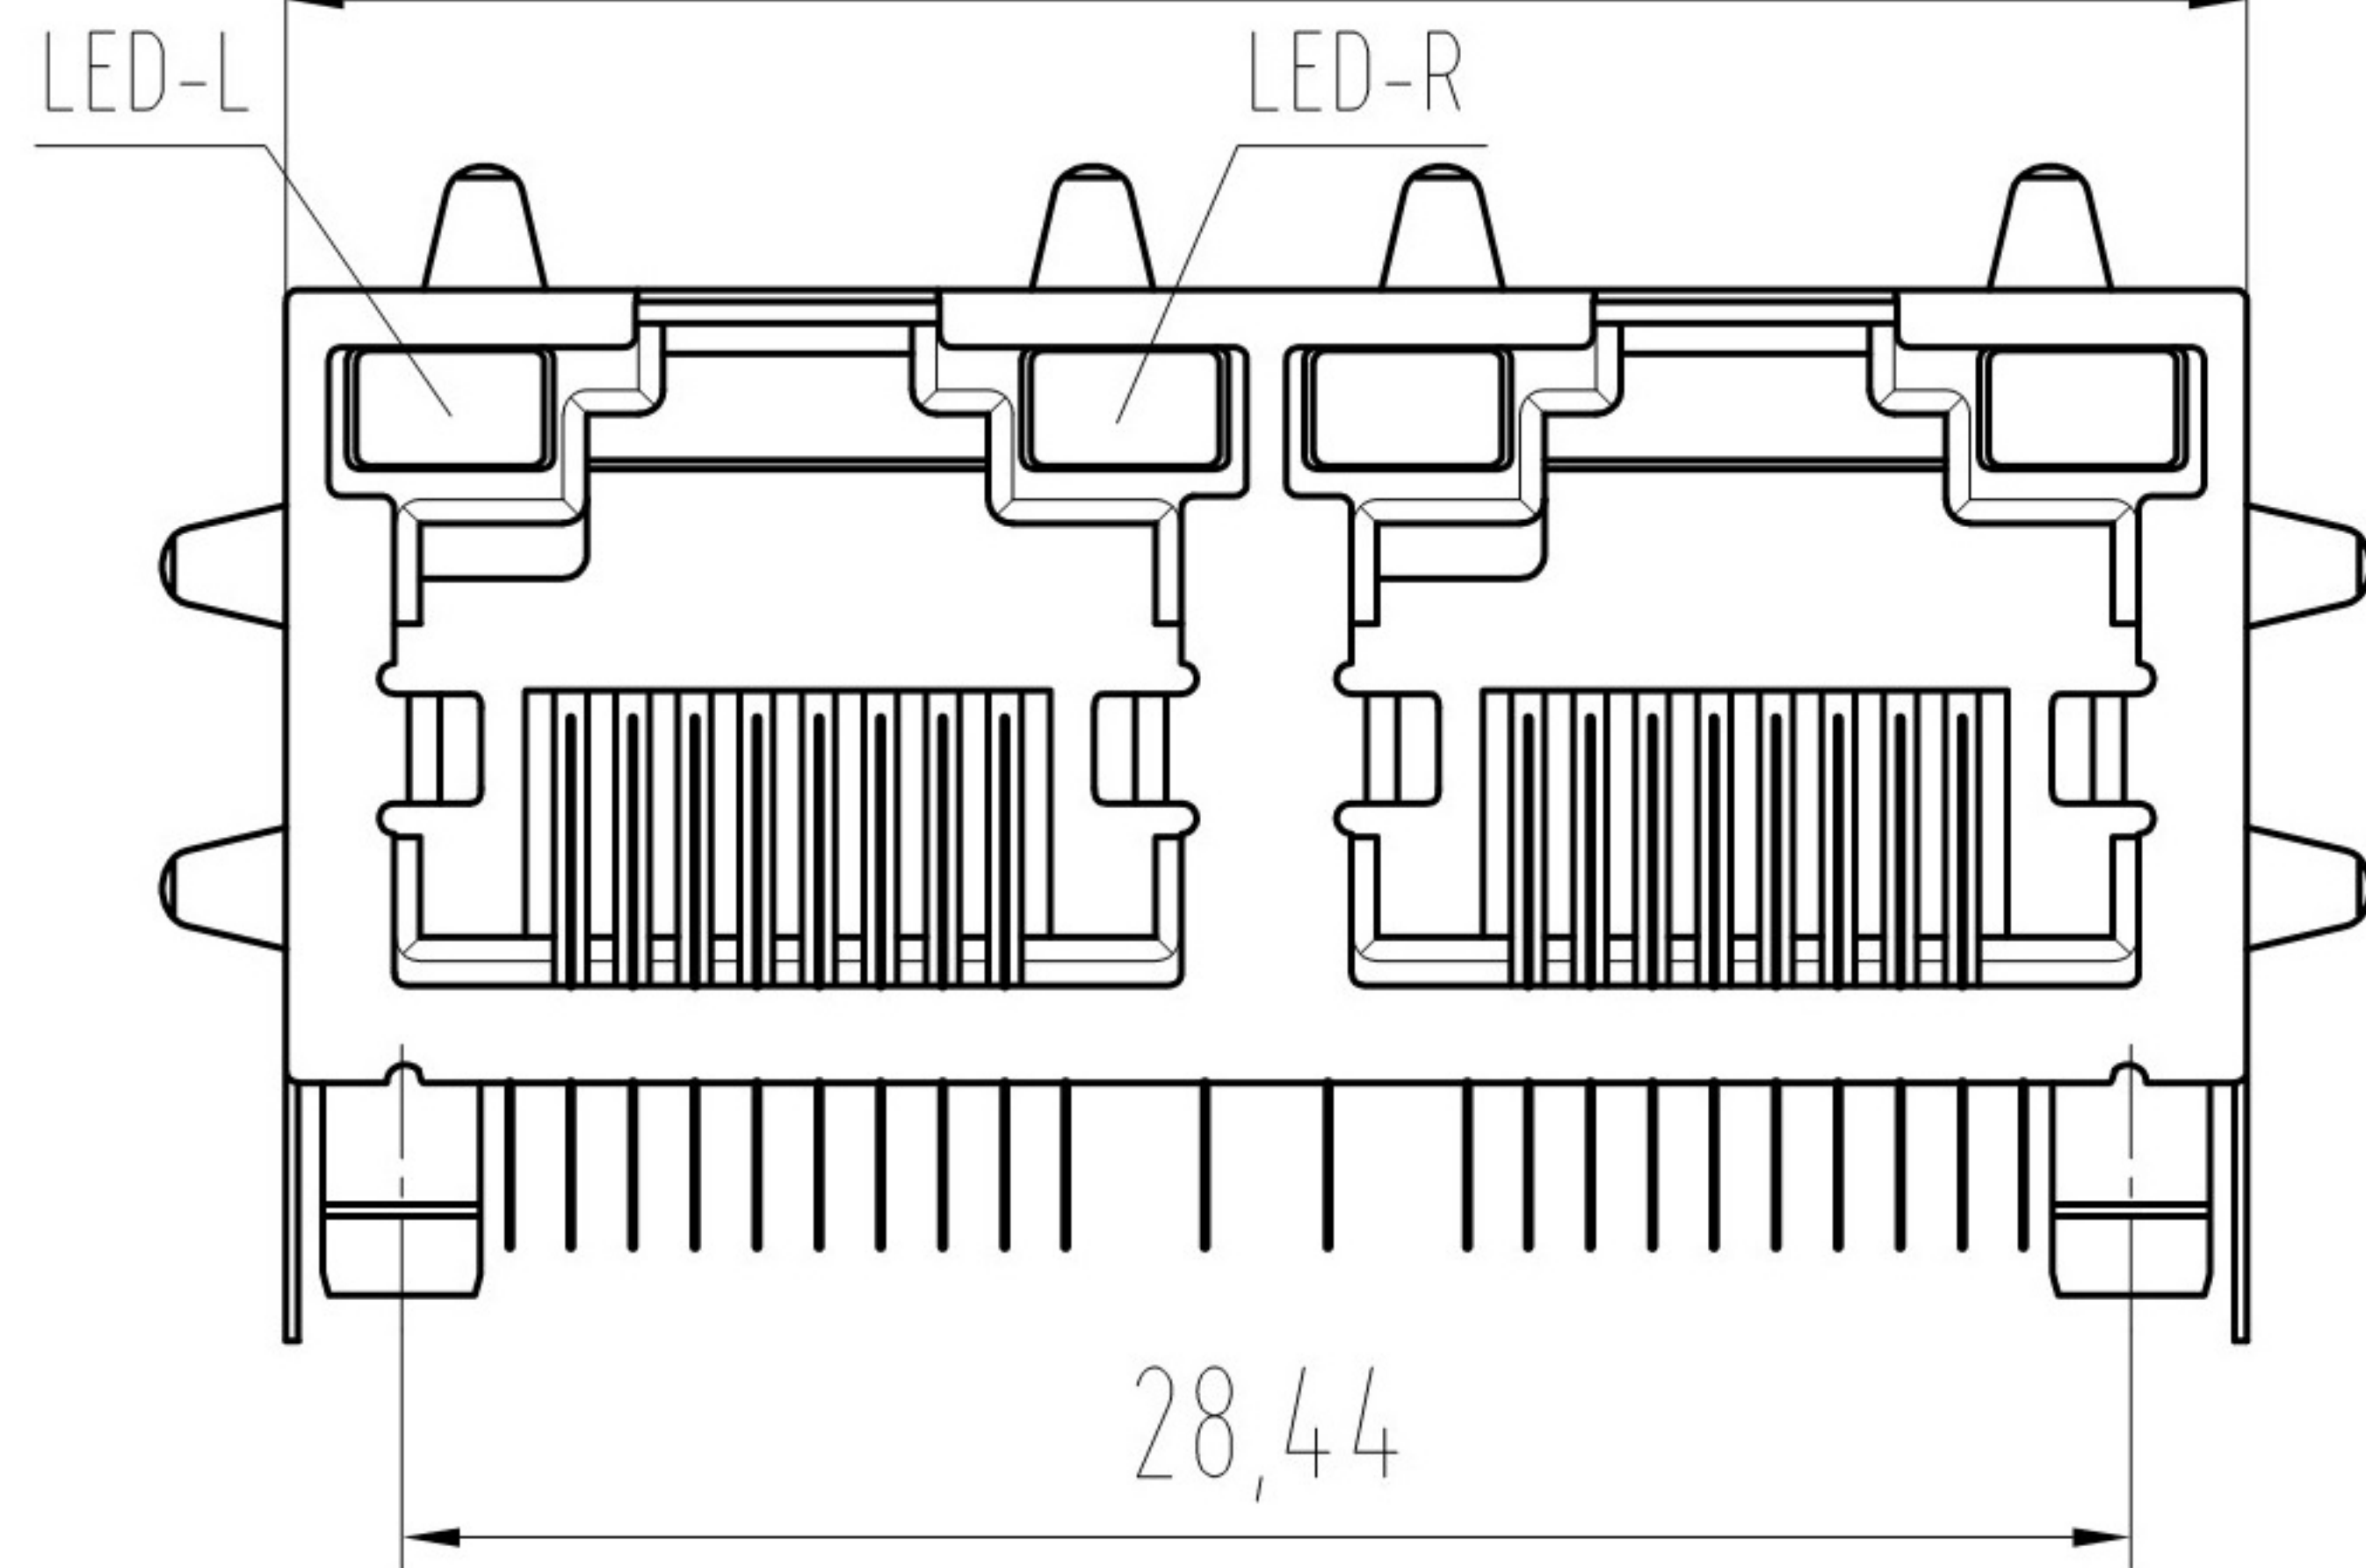

PC Board Layout
Component Side Shown

NOTES:

MATERIAL:

1.HOUSING MATERIAL	GLASS FILLED POLYESTER UL94V-0.
2.CONTACT MATERIAL	PHOSPHOR/BRONZE Ø0.46mm.
3.PLATING	GOLD PLATING OVER NICKEL.
4.SHIELD	0.20mm THICKNESS COPPER ALLOY WITH NICKEL PLATED.
5.LED	OPTION

ELECTRICAL:

1.VOLTAGE RATING	125 VAC RMS.
2.CURRENT RATING	15 AMP.
3.CONTACT RESISTANCE	30 MILLIOHMS MAX.
4.INSULATION RESISTANCE	500 MEGOHMS MIN @ 500V DC.
5.DIELECTRIC WITHSTANDING RESISTANCE	1000V AC RMS 50Hz 1MIN.


MECHANICAL:

1.DURABILITY	750 CYCLES MIN.
2.PCB RETENTION PRE-SOLDER	1 LB MIN.

ENVIRONMENTAL:

1.STORAGE	-40°C~+85°C
2.OPERATION	0°C TO 70°C

PART NUMBER:

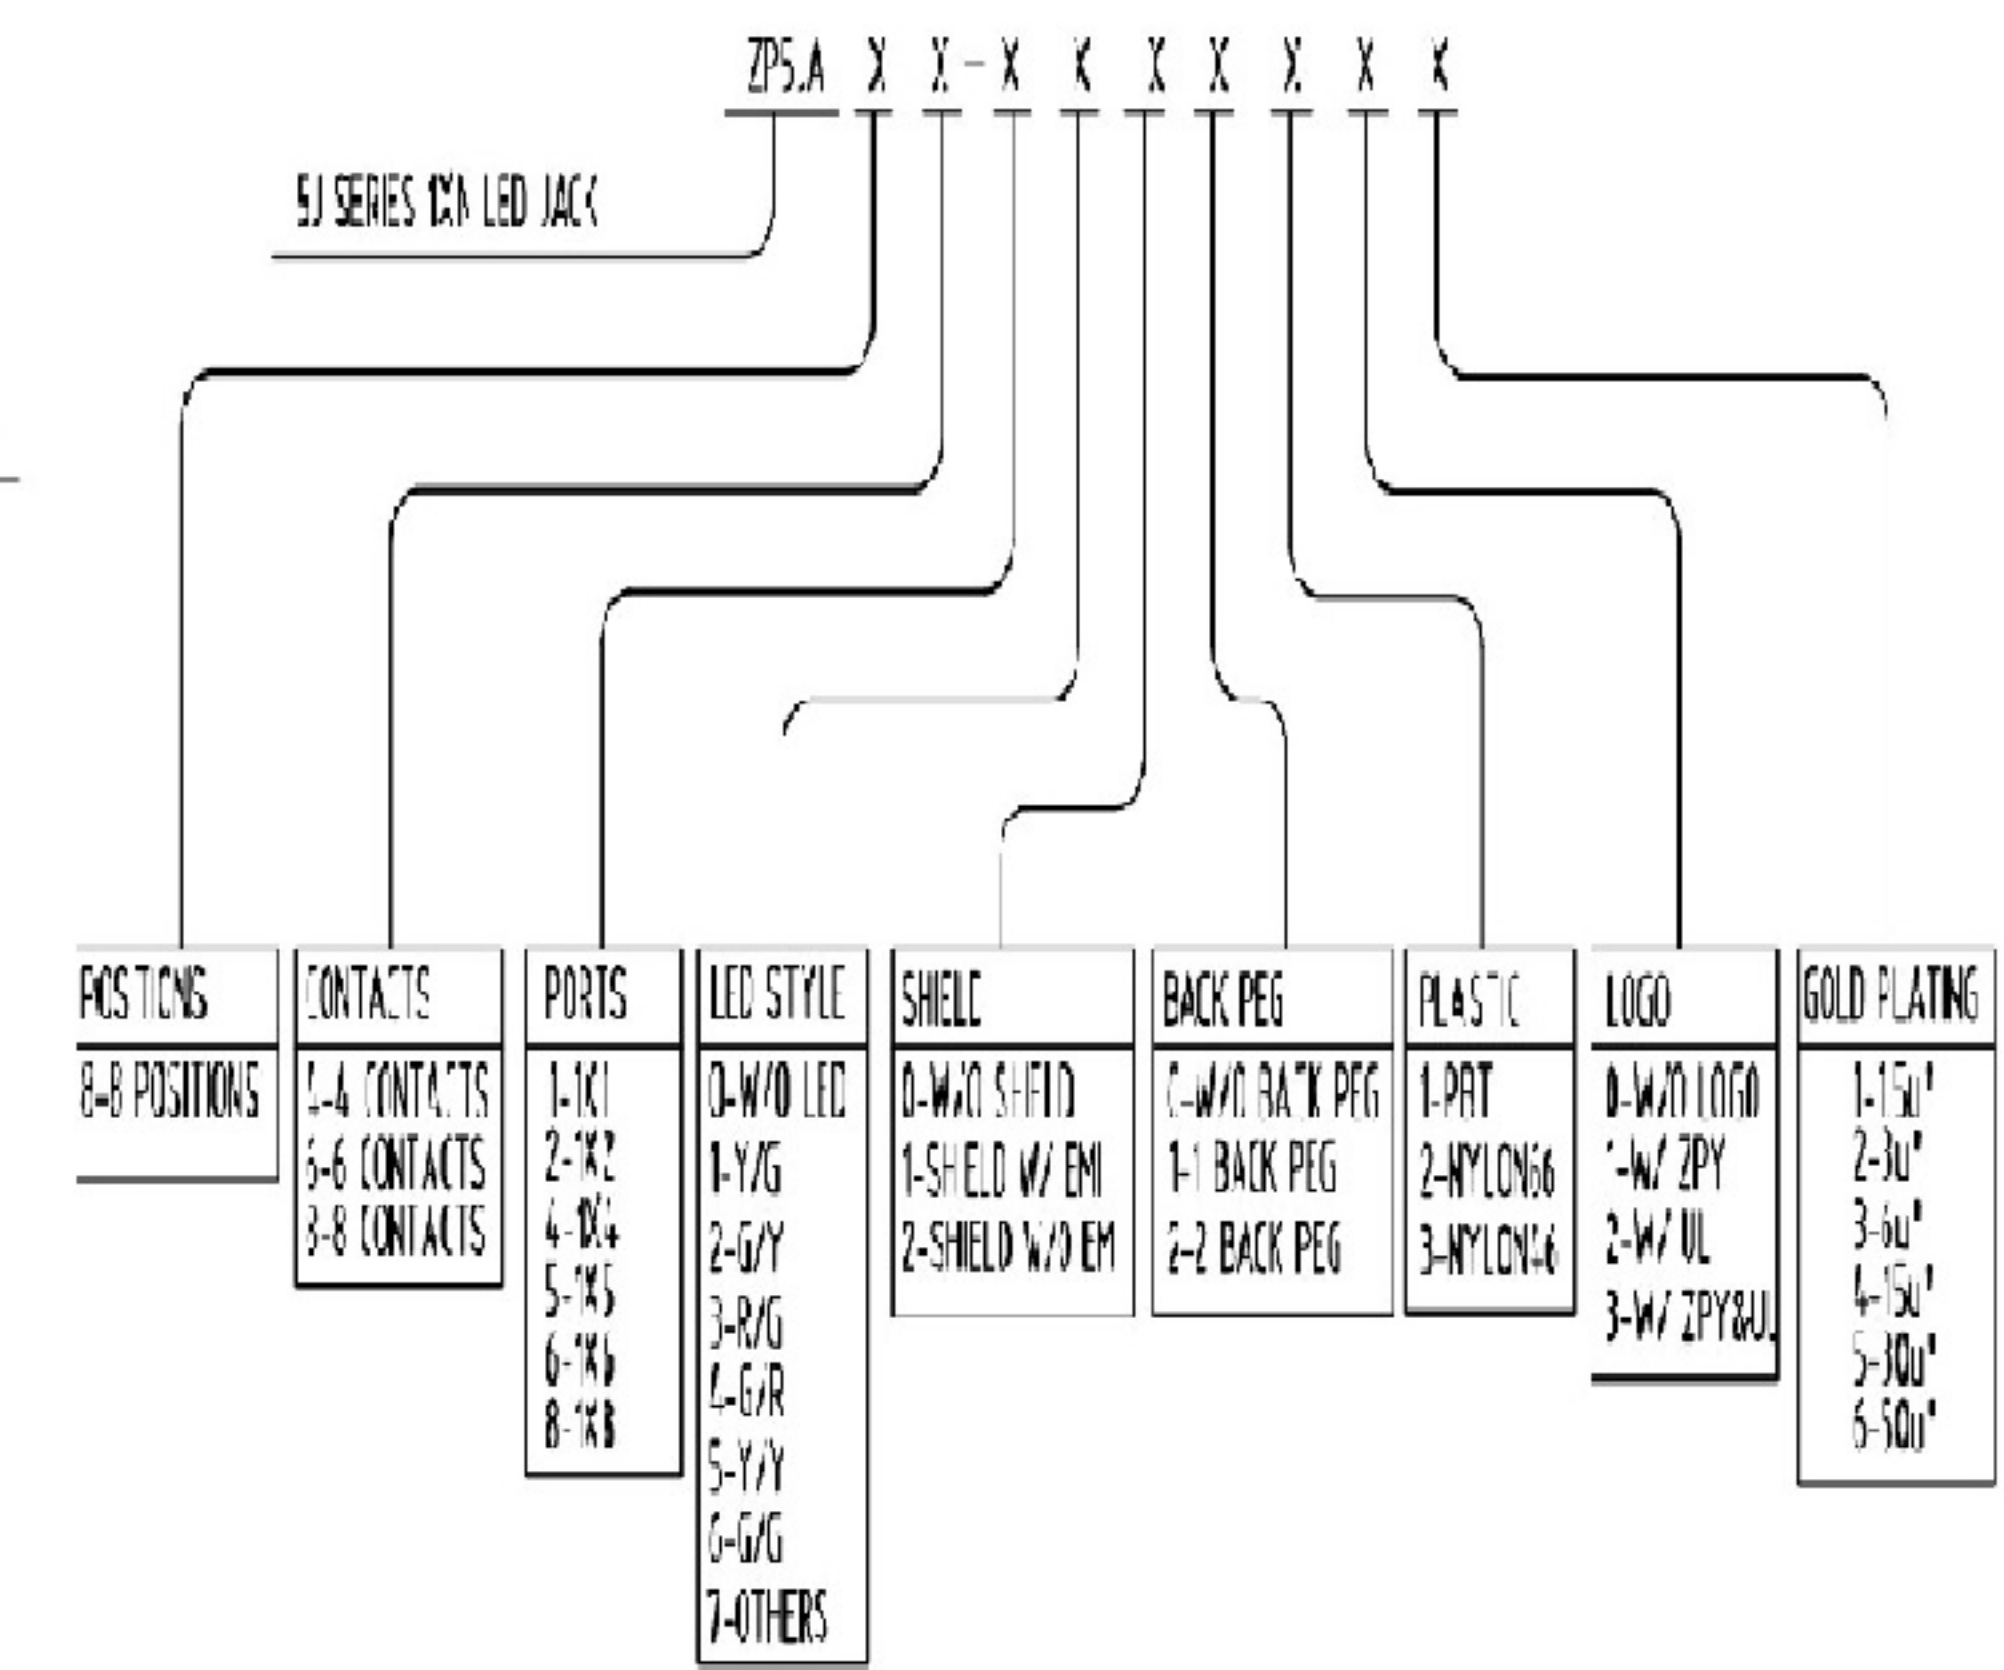

东莞市溪榜电子有限公司
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD

Address: China, Dongguan City, Guangdong Province, Huang Jiang
TLE: 0769-82055138 0769-82056828
E-mail: XB@ALPSR.CN E-mail: CN@ALPSR.CN
Website: www.alpsr.cn www.alpsr.com

TITLE:
RJ45

PART NO.:

REMARK:


SIZE
A4

SACLE
1:1

SHEET
1/2

UNITS
MM[INCH]

REV
A0

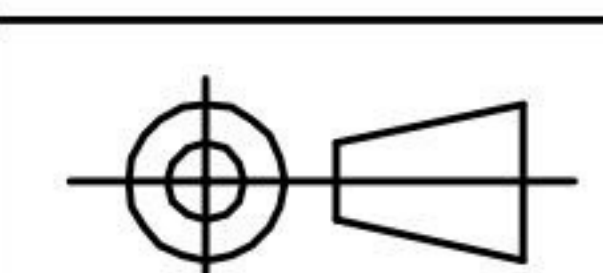

GENERAL TOLERANCES
UNLESS SPECIFIED

x±0.35	x°±3.0°
.x±0.30	.x°±2.0°
.xx±0.25	.xx°±1.5°
.xxx±0.10	.xxx°±1.0°

APPROVED BY:
JP.Gong

CHECKED BY:
TW.Xu

DESIGND BY:
ZG.Hu