

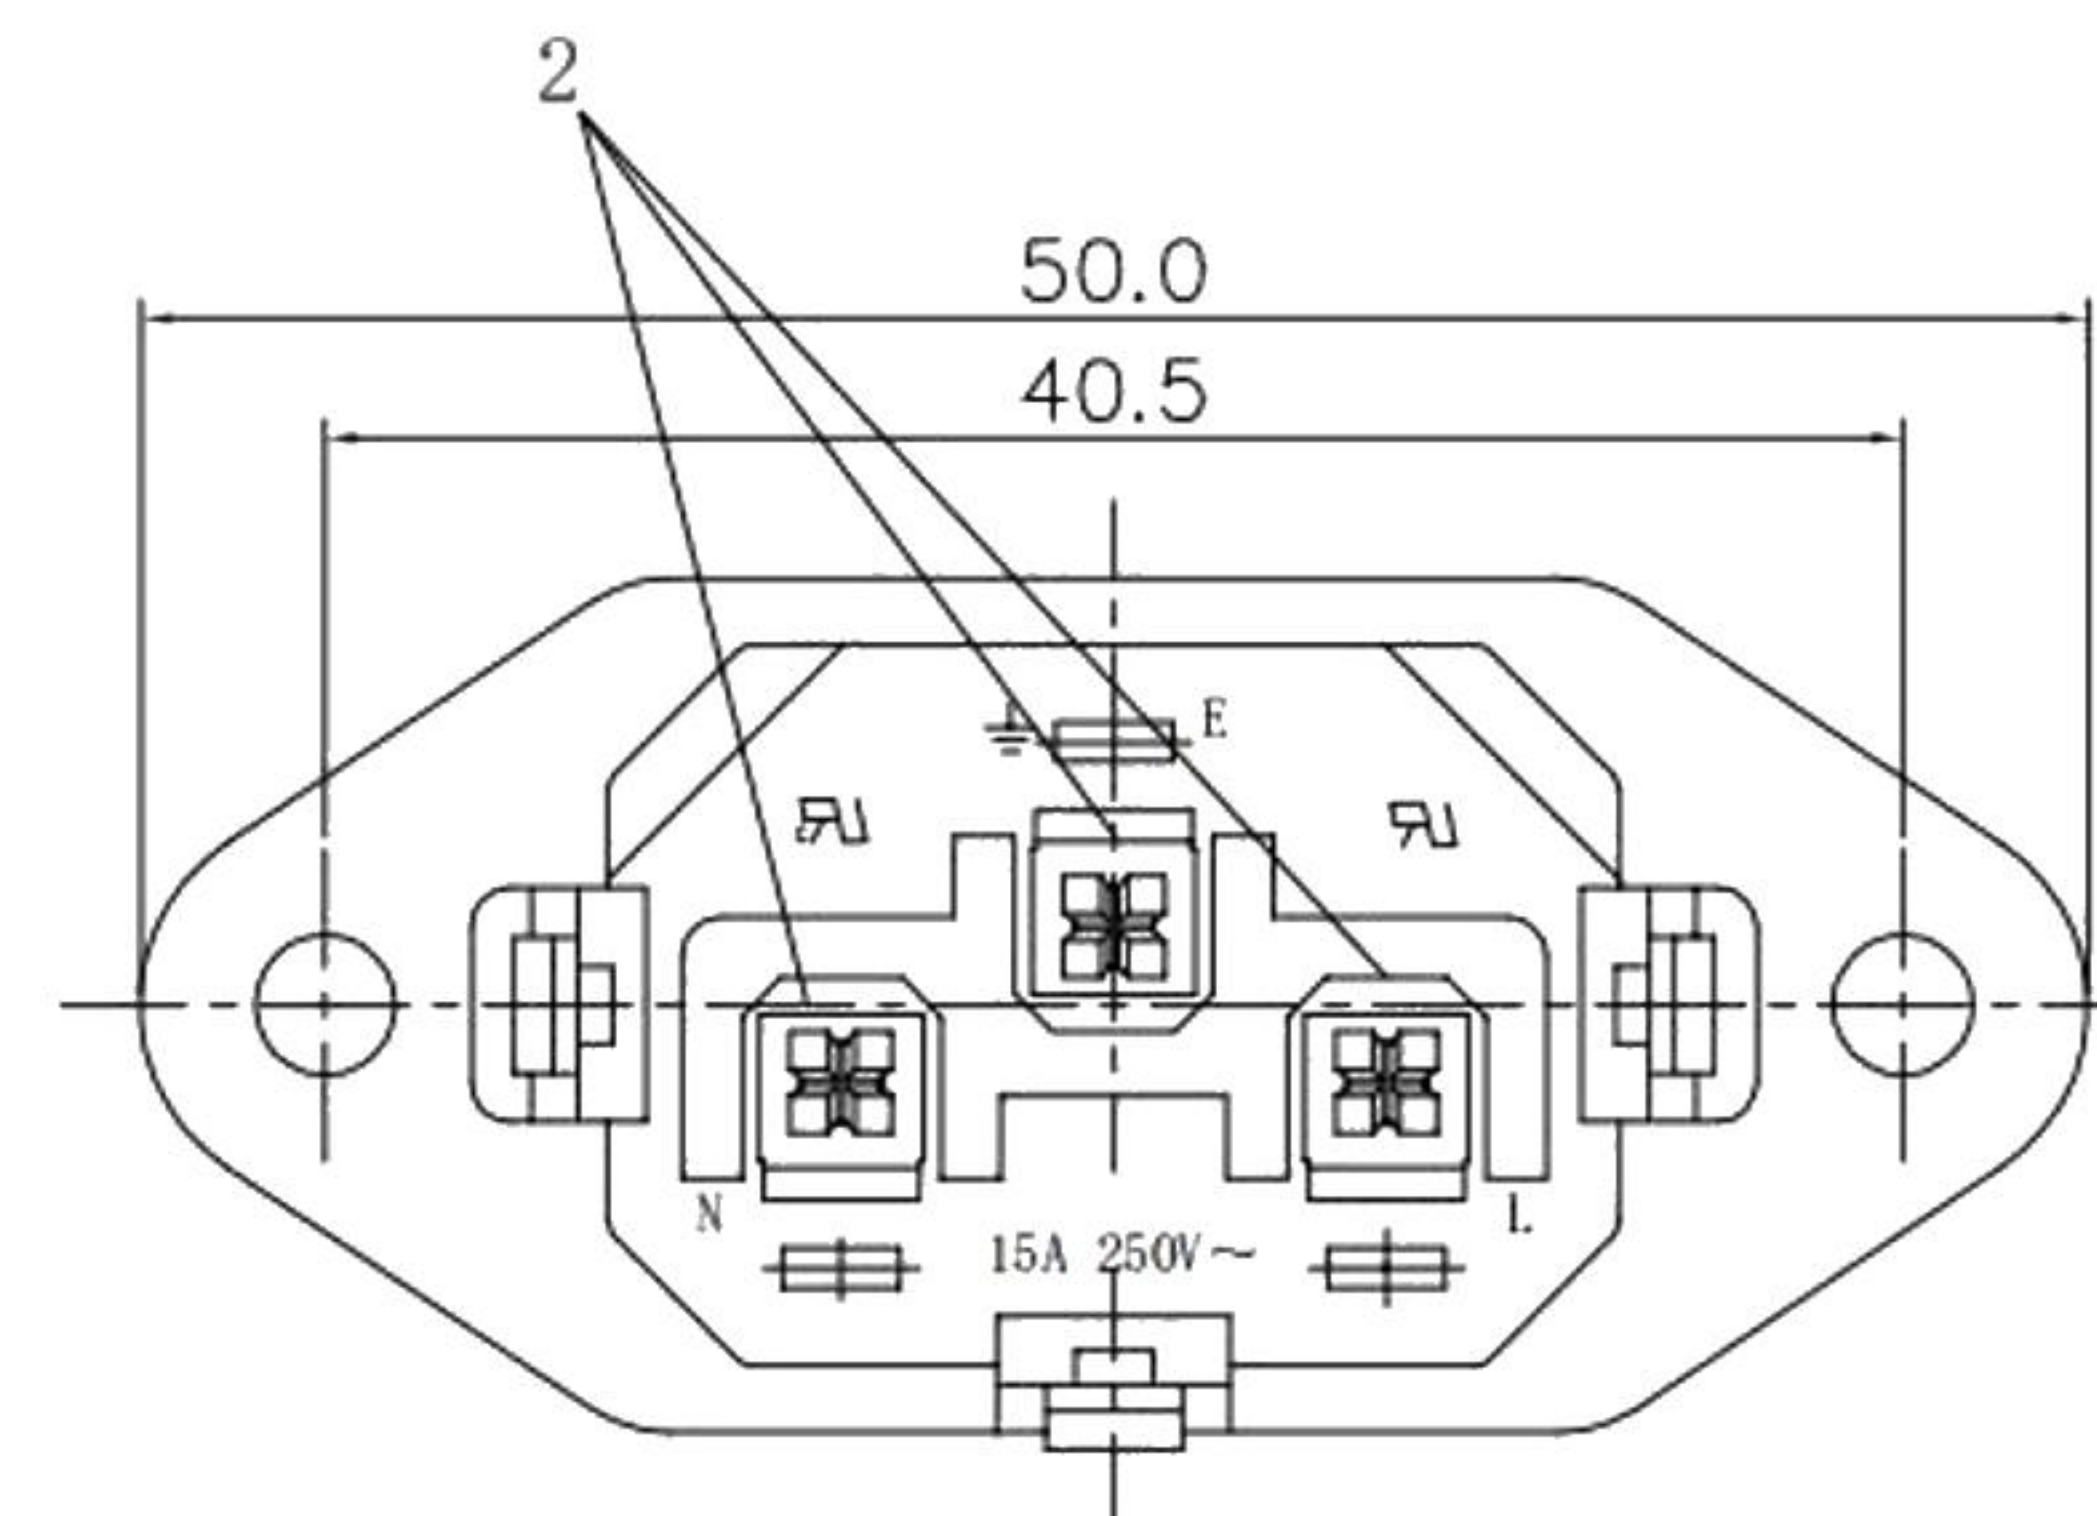
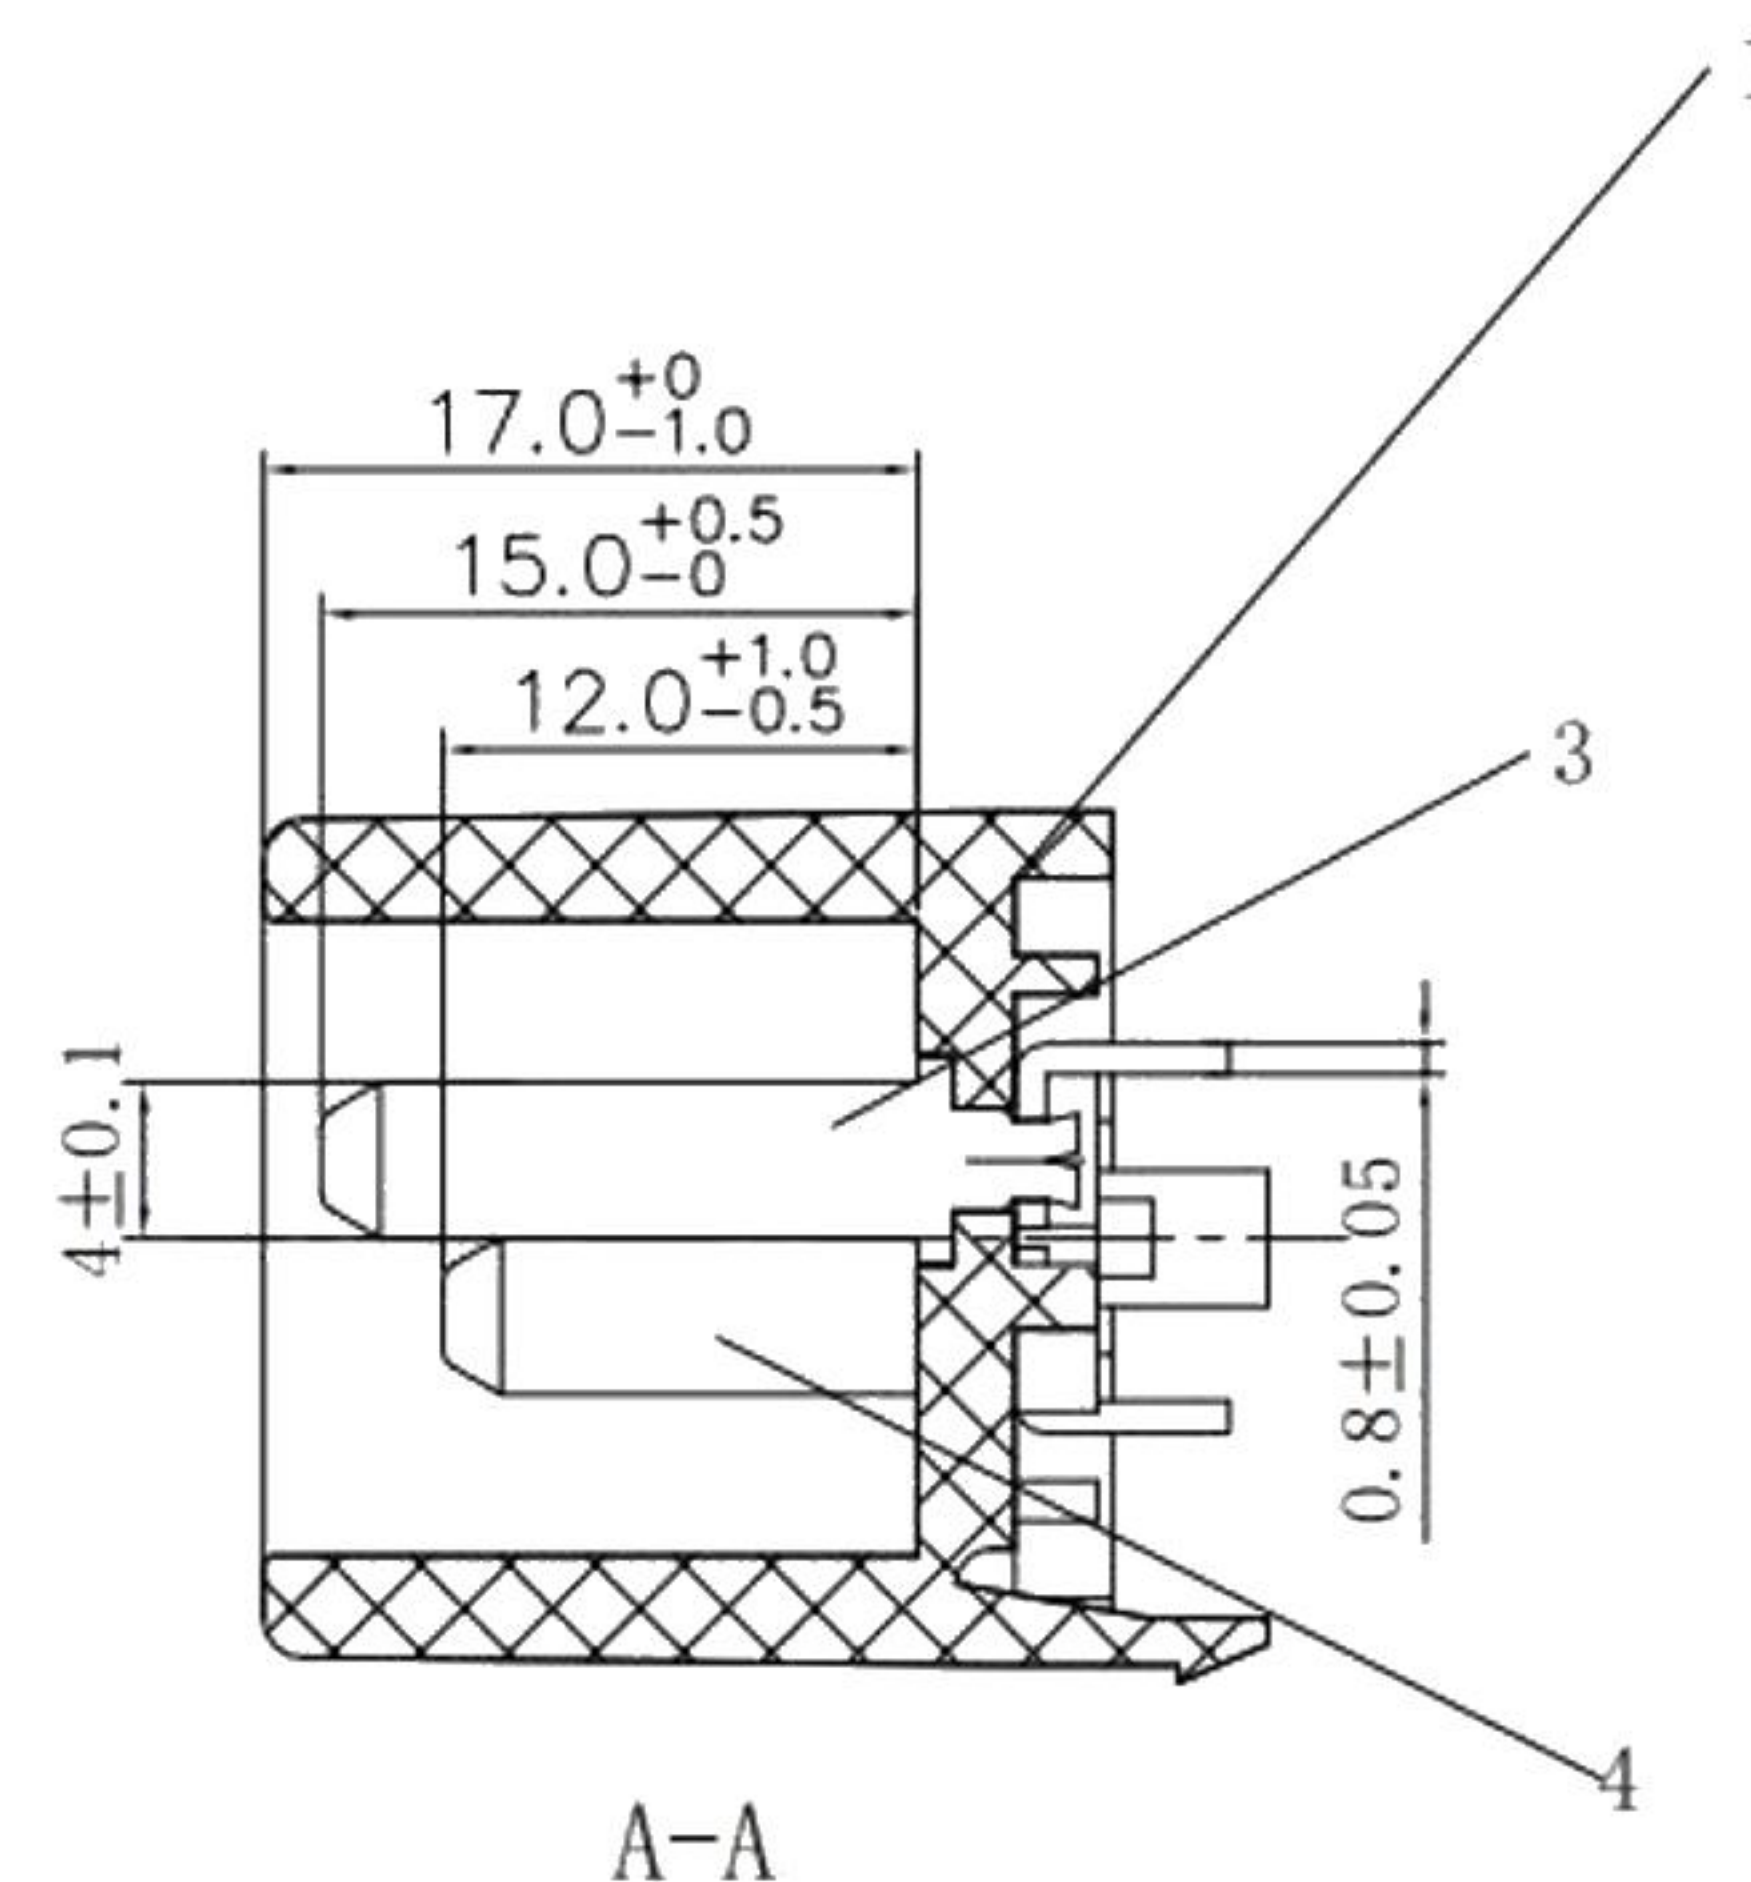
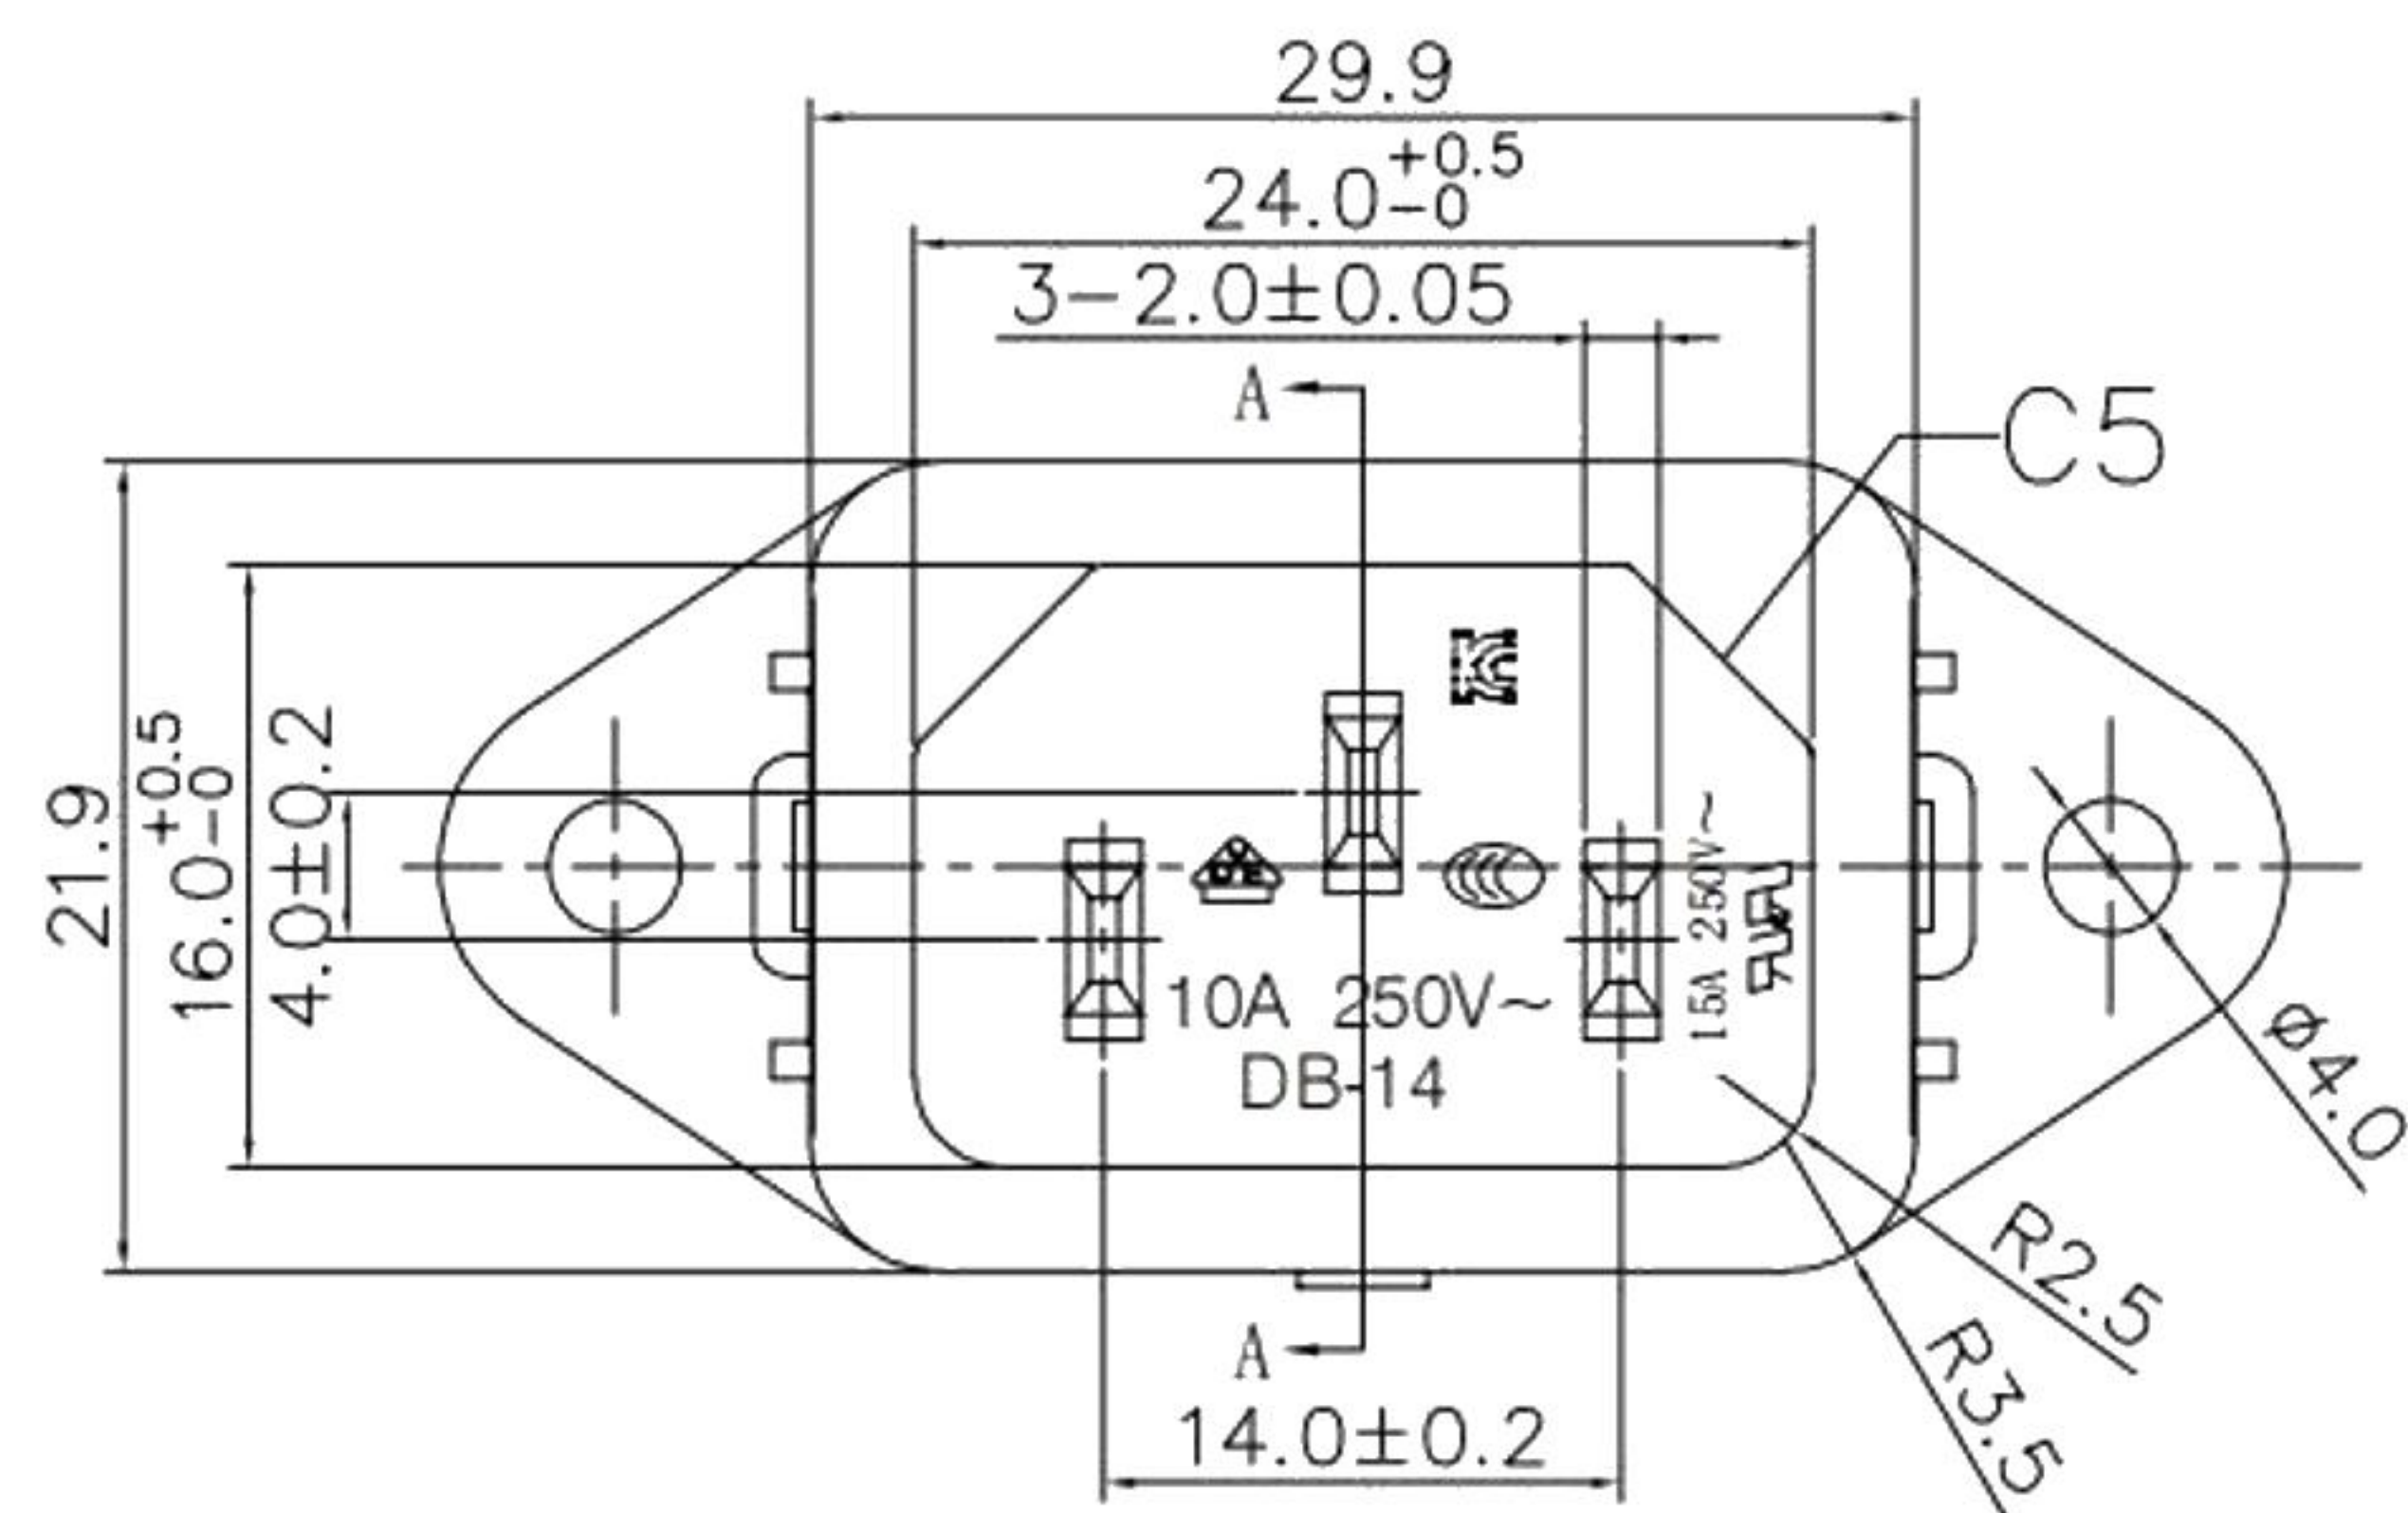


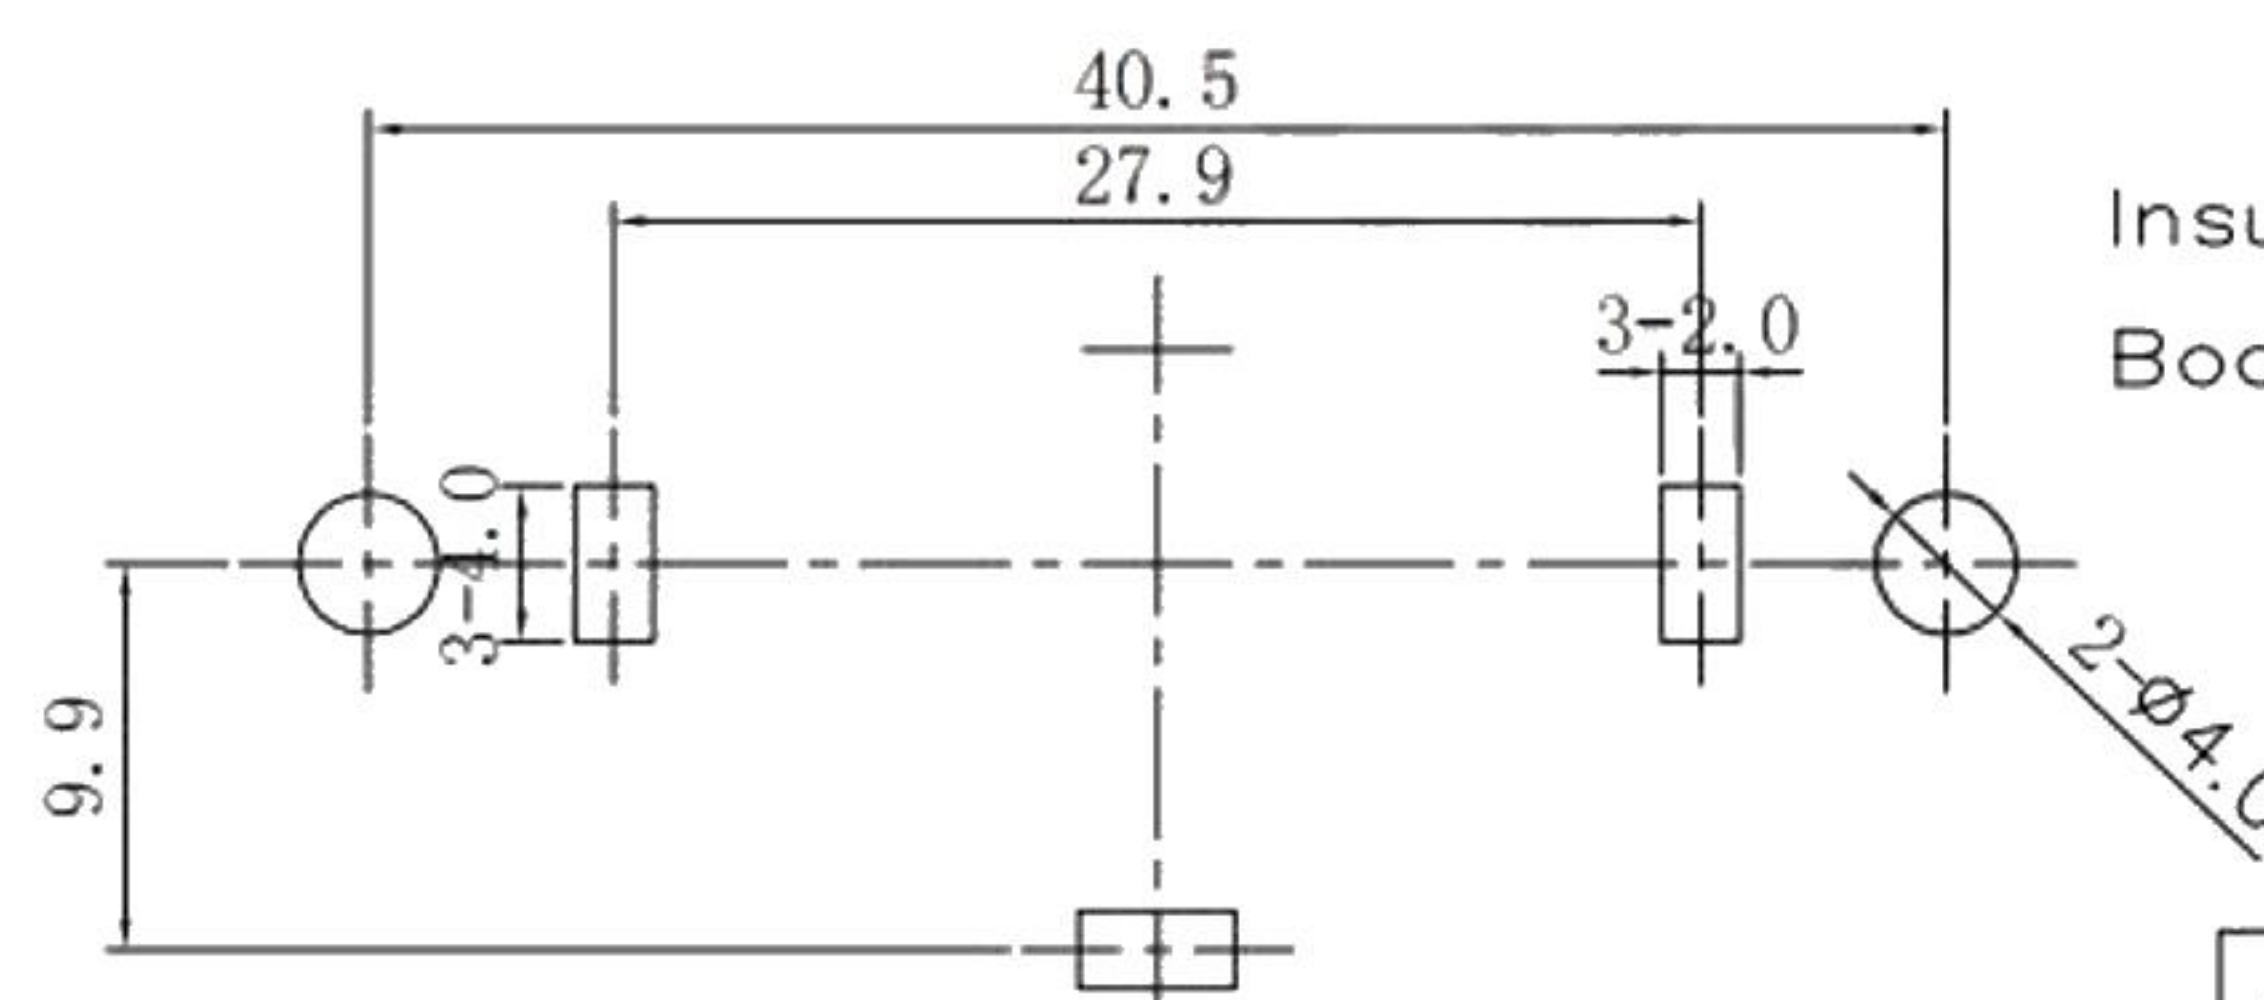

Rating :
15A 250V AC UL cUL
10A 250V AC VDE 3C KC

Insert And Extract Force: 20N~50N
 Terminal Strength: $\geq 60N$
 Operating Life: ≥ 6000 cycles
 Withstand Voltage: Between all terminals: 2500VAC (50~60Hz) 1min
 terminals to Base: 3750V AC (50~60Hz) 1min
 Leakage Current : 1mA

Insulation Resistance: $\geq 100M\Omega$ 500V DC
 Body Materil: NYLON 66 94V-2~0

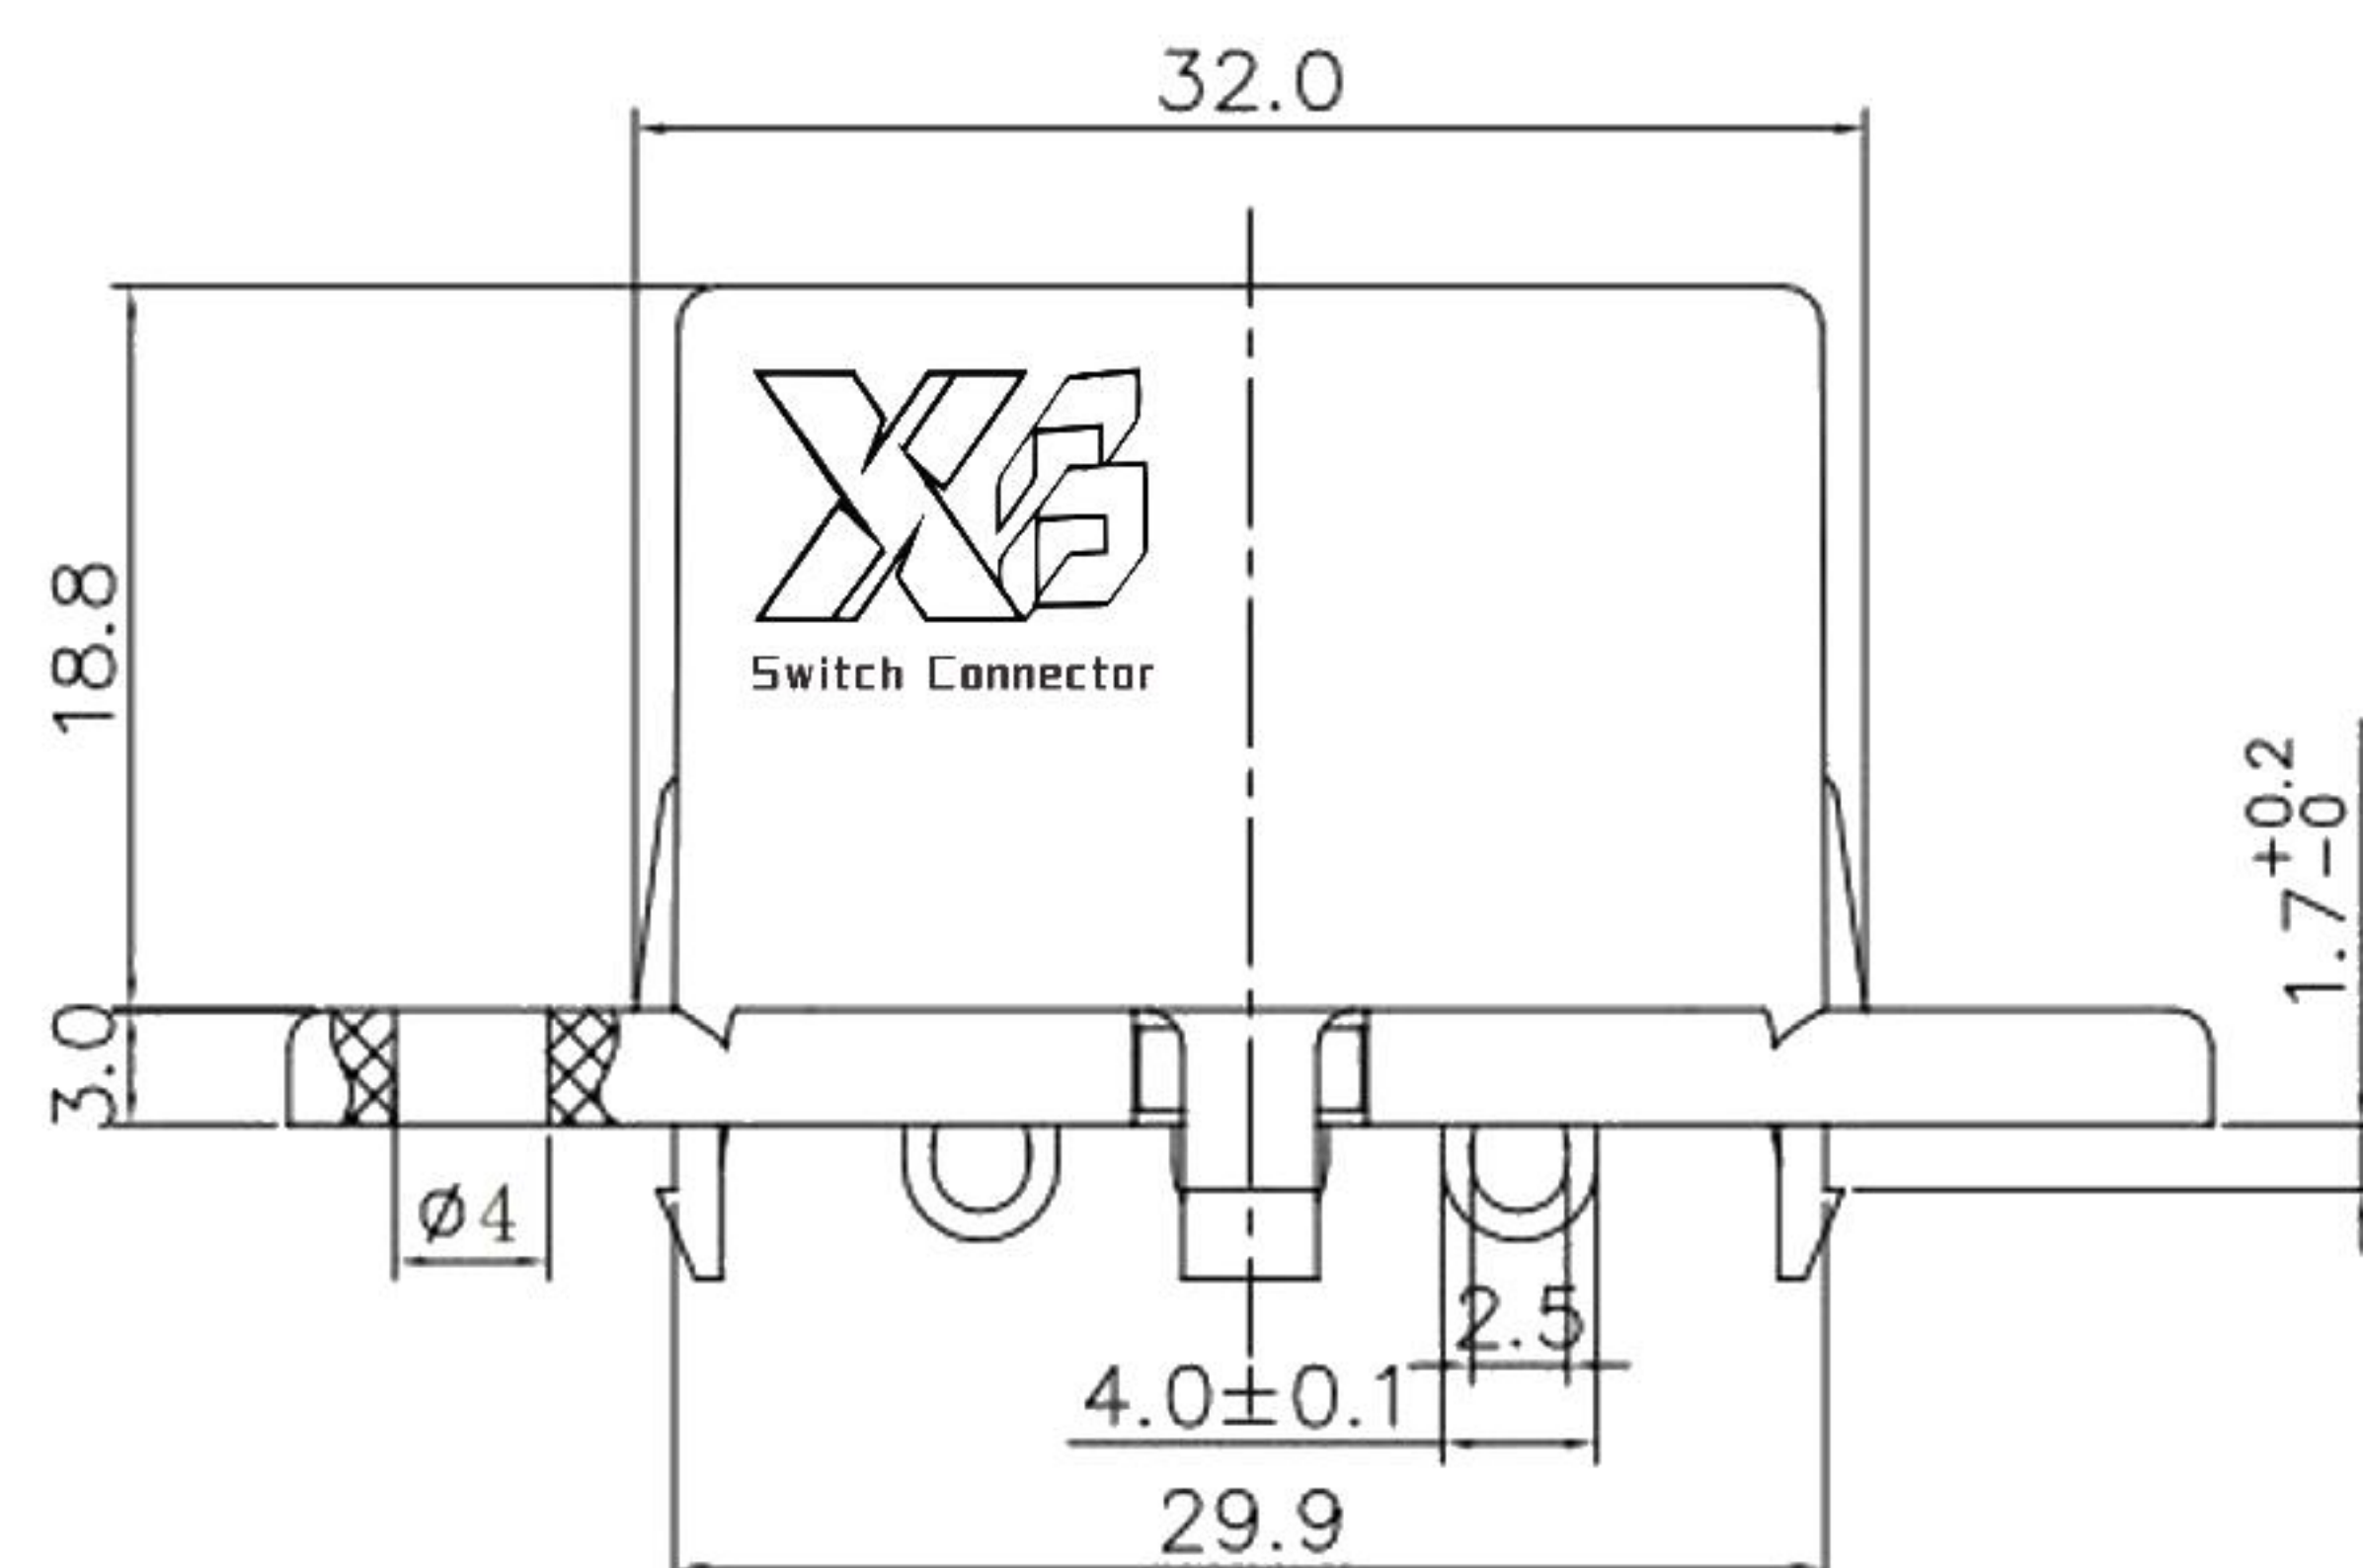

PANEL CUT-OUT

序号	名称	材料	处理	数量	备注
1	DB-14-13PL塑料件	环阻PA66	黑色	1	
2	DB-14-Q端子	黄铜	镀锡	3	Plating Thickness >80u''
3	DB-14-PL插销	黄铜	镀镍	1	Plating Thickness 40u''-80u''
4	DB-14-PS插销	黄铜	镀镍	2	Plating Thickness 40u''-80u''

55*32*25cm箱, 50只*36吸盒装=1k件, 净重:21.6 毛重:23.6=KG,

A4				普通公差		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.							
A3				COMMON TOLERANCE :									
A2				UP TO 5	±0.20	单 位	mm	投 影		品 名	Ac Inlet C14型	比 例	Free
A1				ABOVE 5 TO 30	±0.30	绘 图	金泽杰	核 对		型 号	DB-14		
				ABOVE 30	±0.50	DATE		2022/5/17		核 准			
REV.	DATE	REVISION	DESCRIPTION	ISSUE	ANGULAR	±5°					DB-14-13PL-QQ-ZP		