

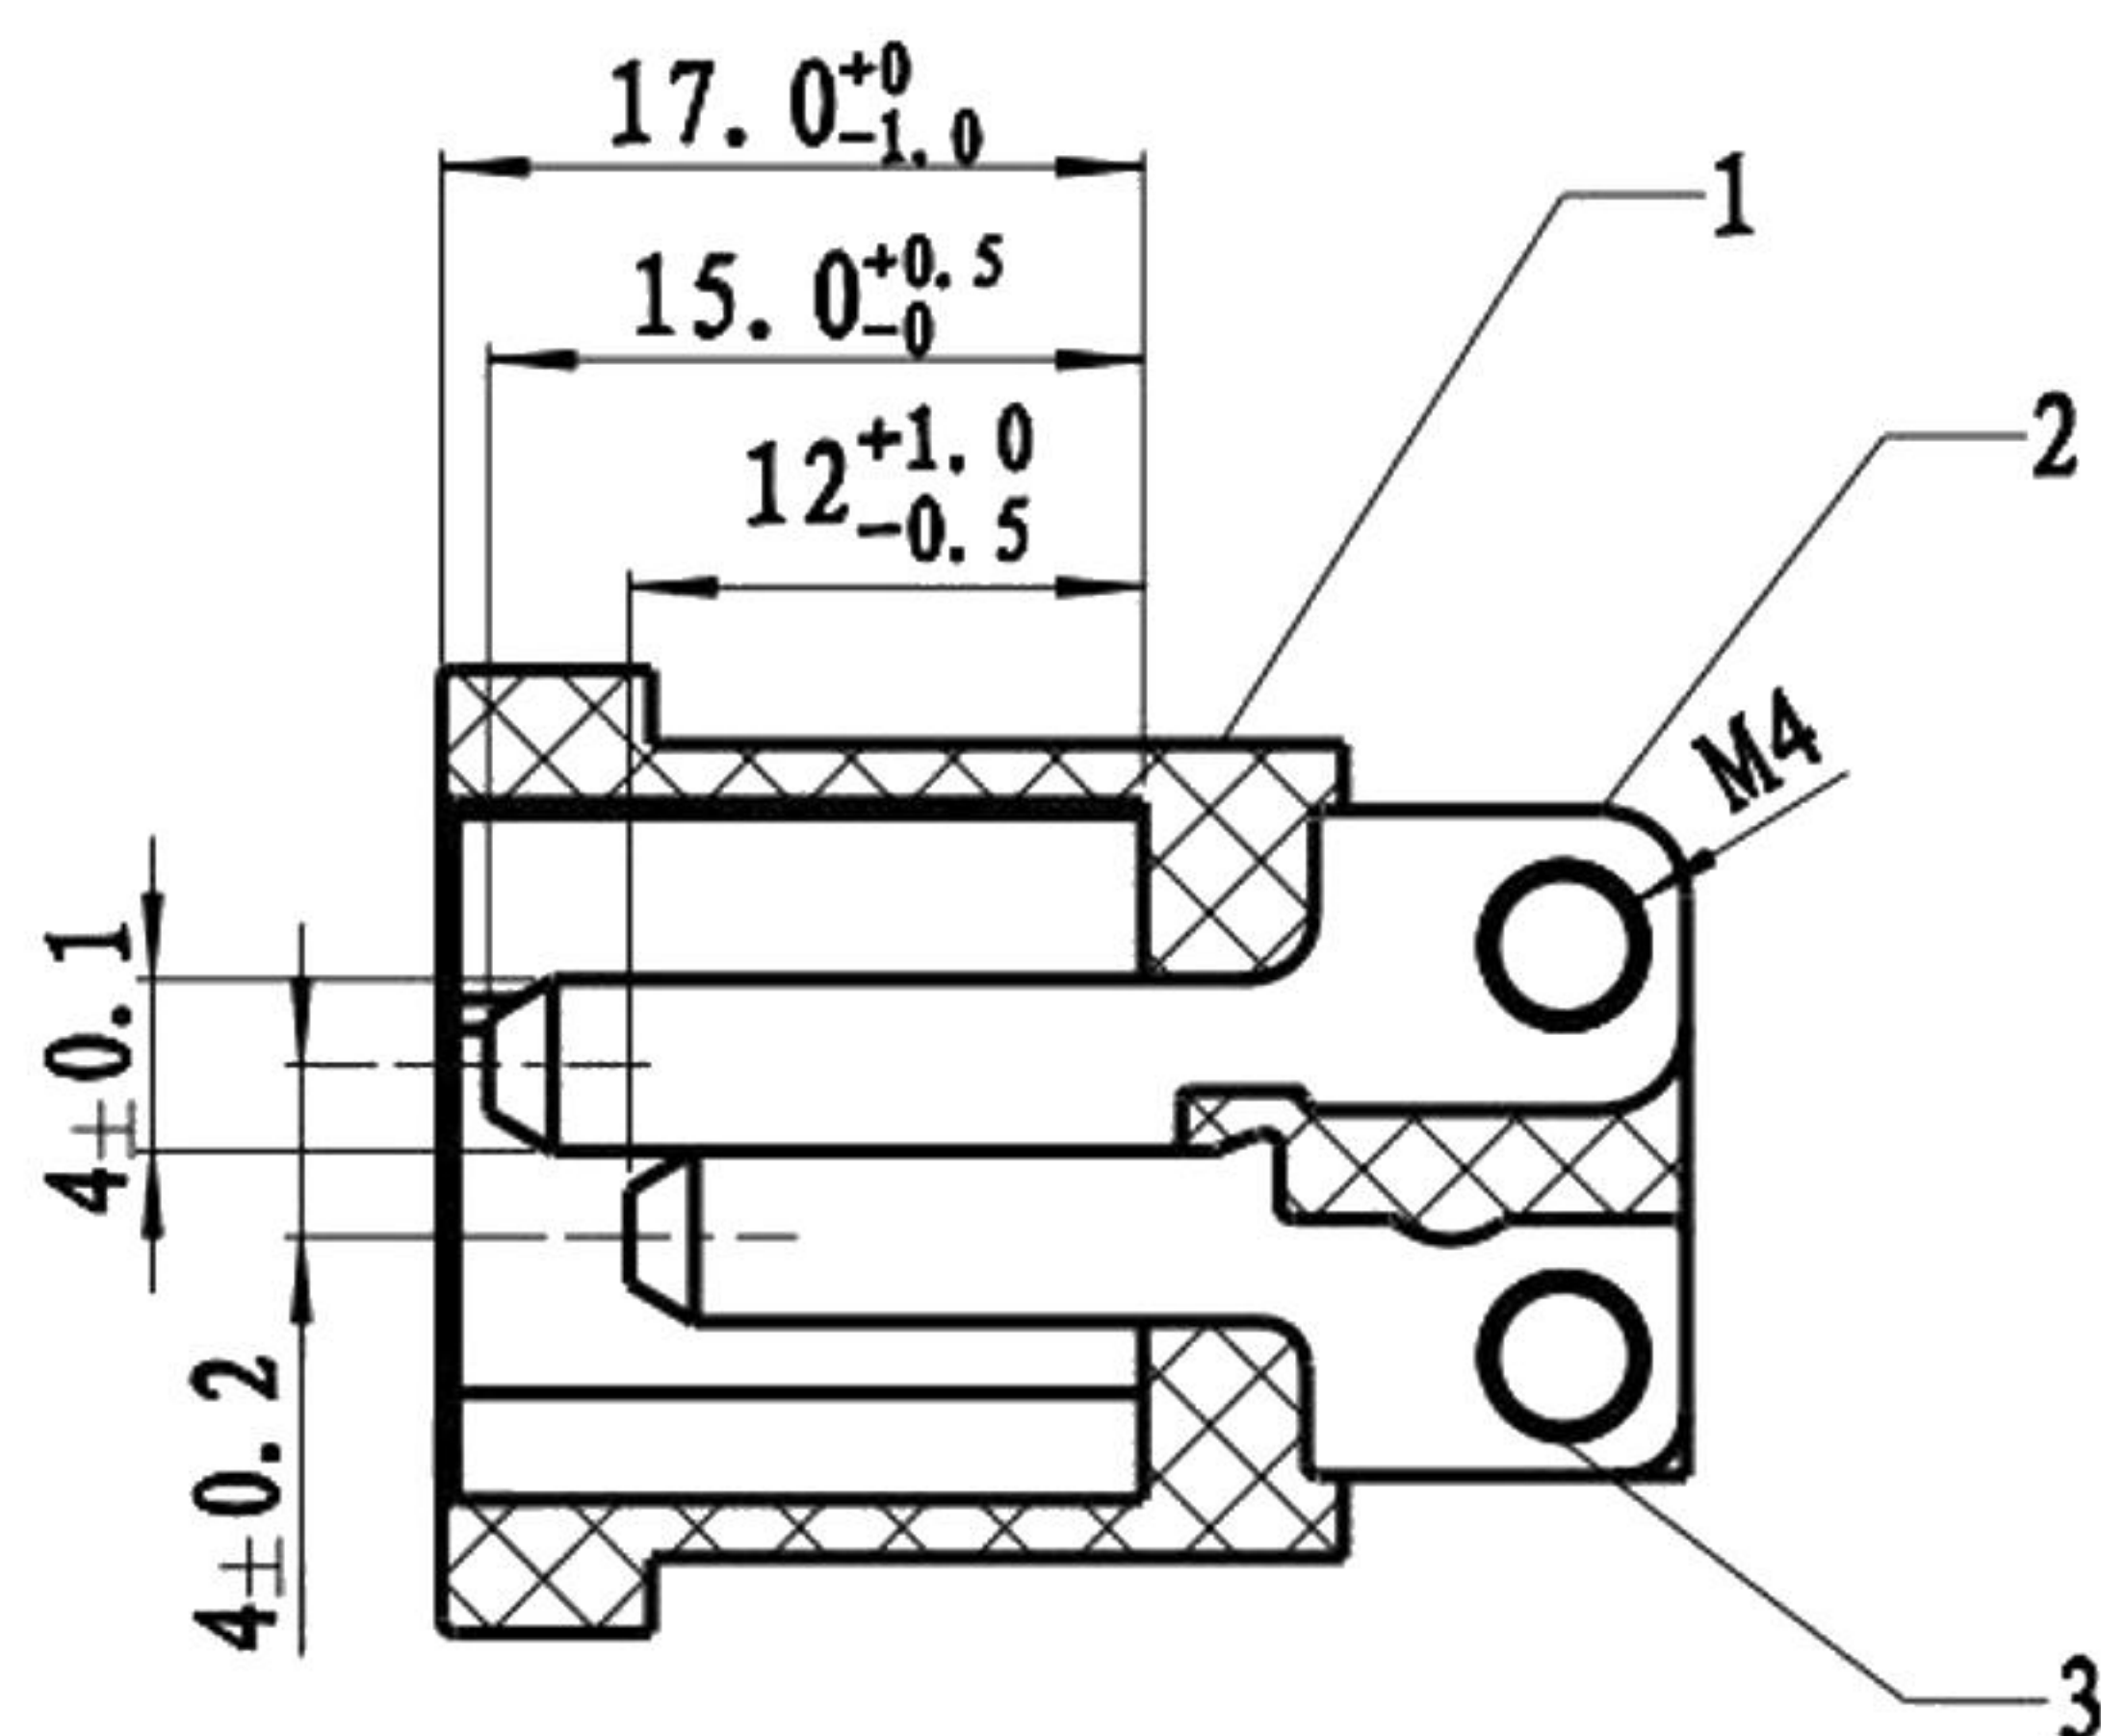
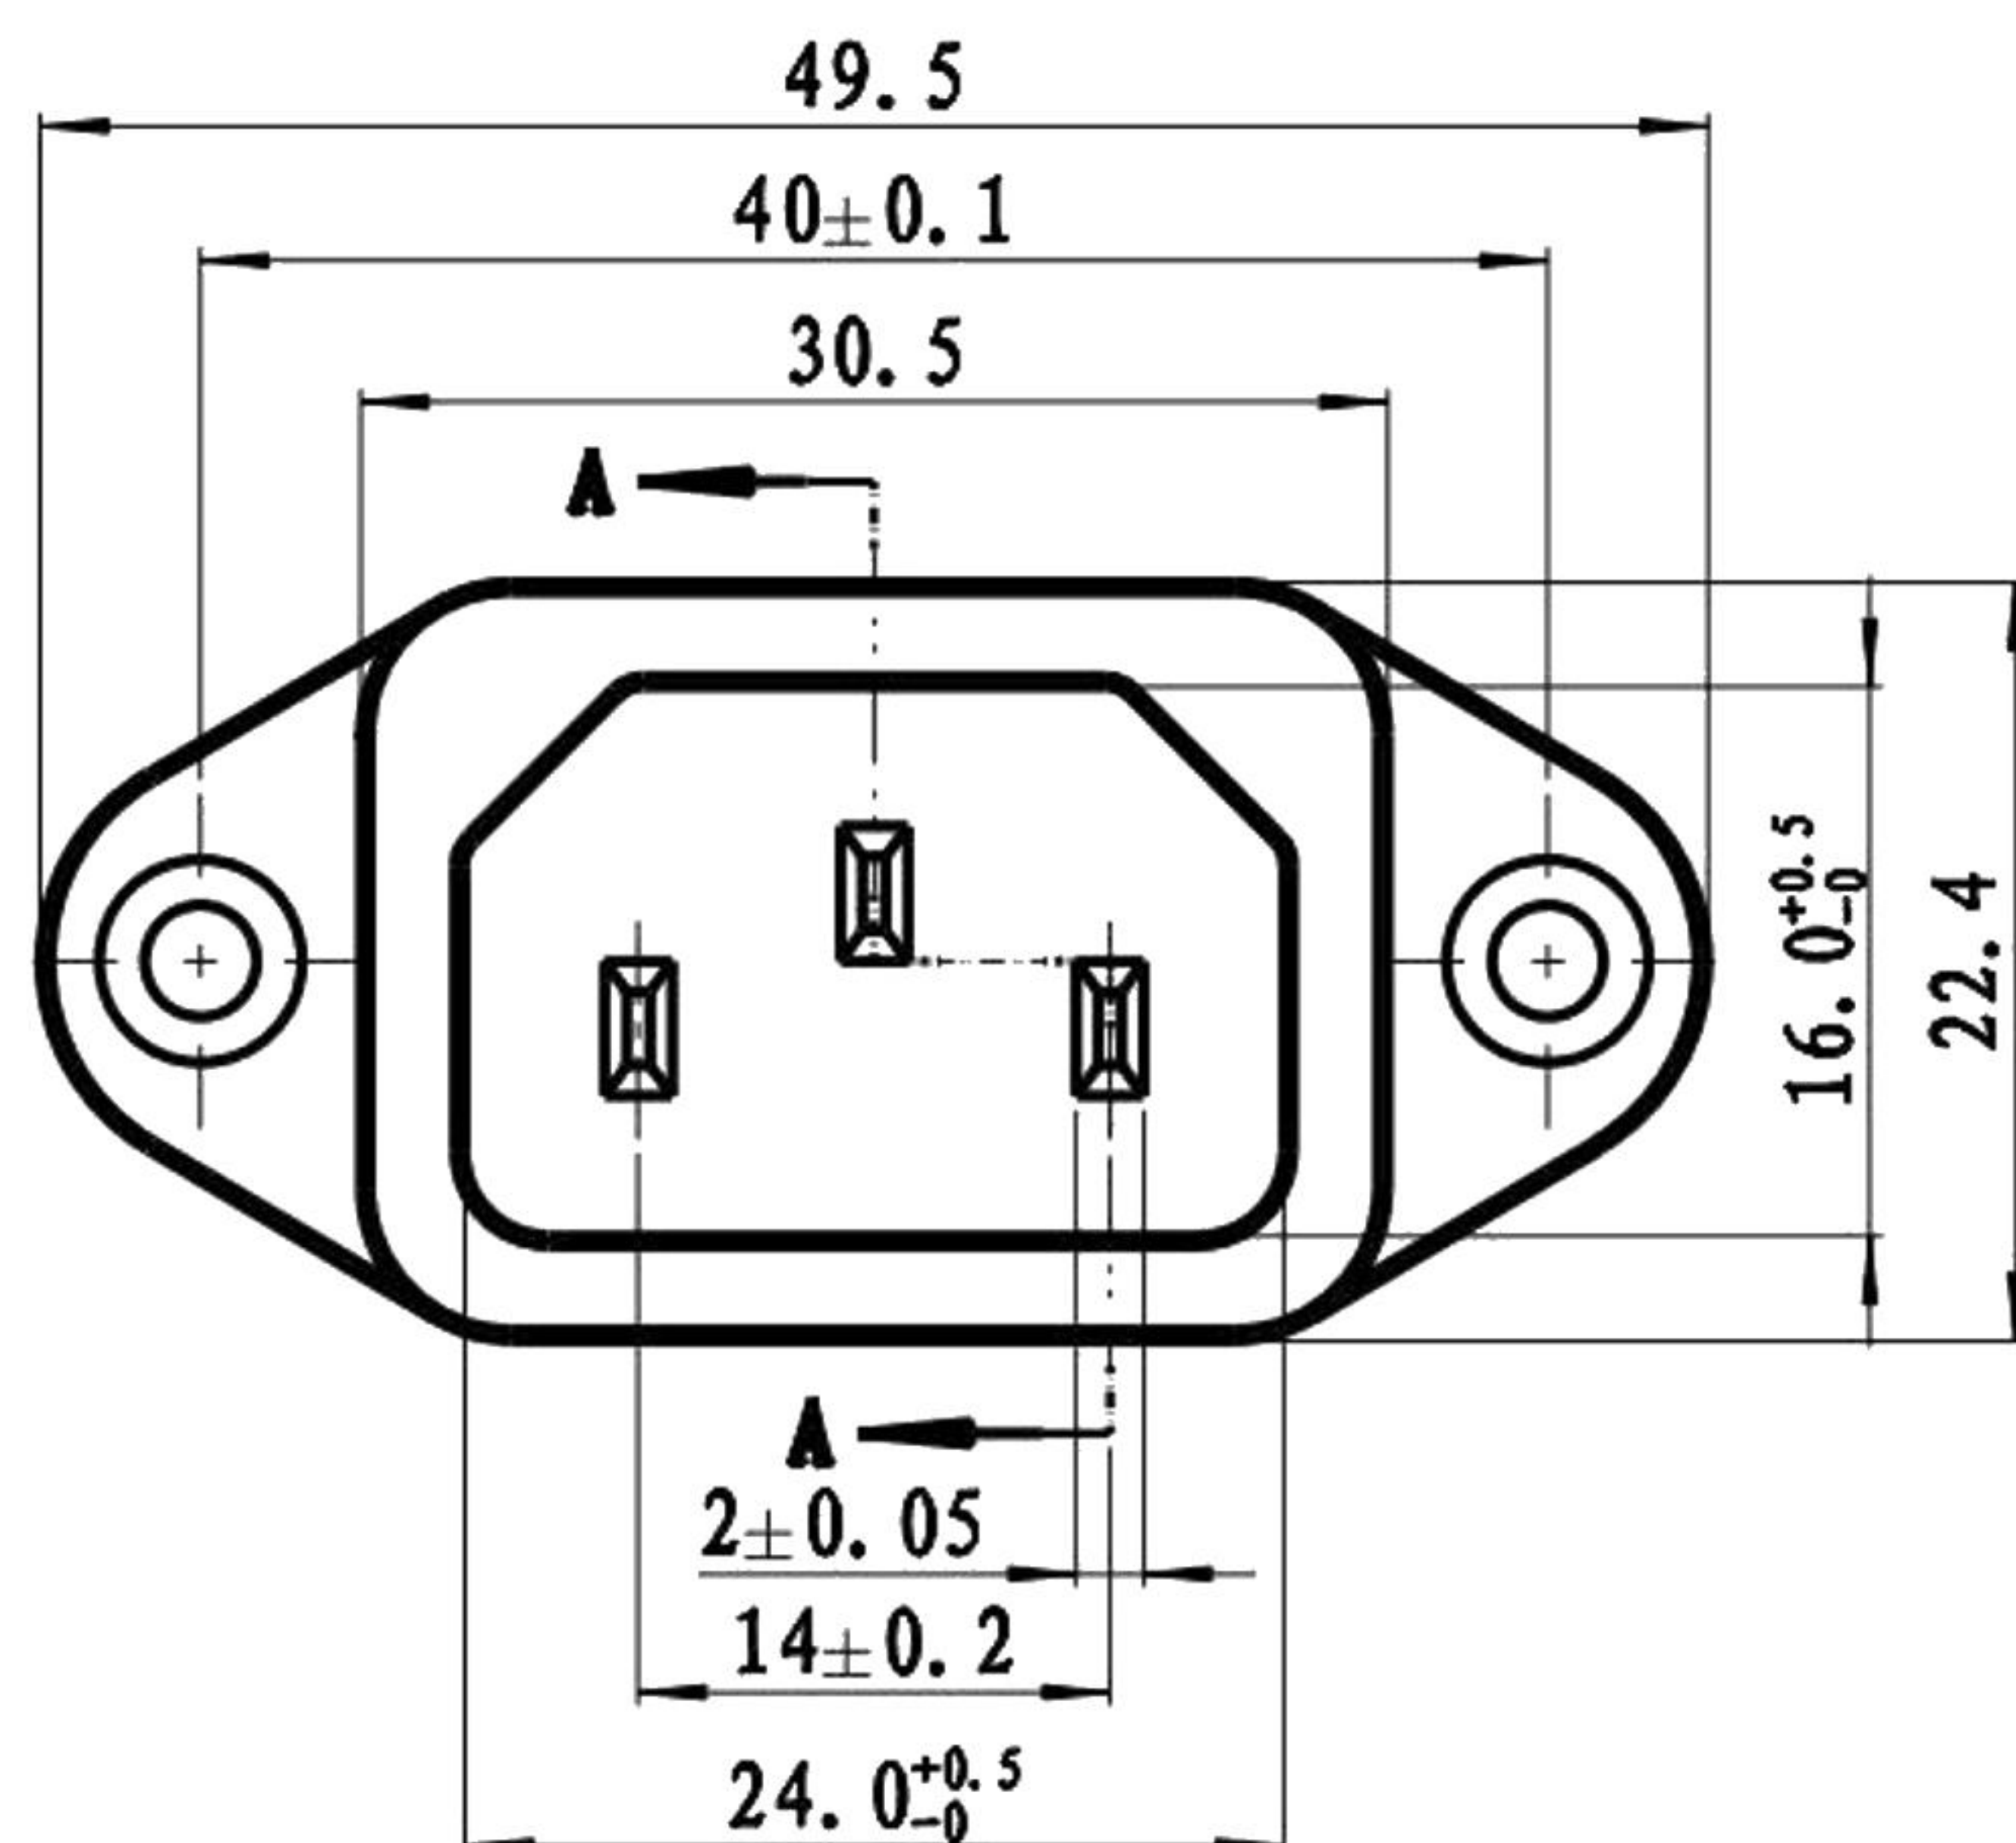


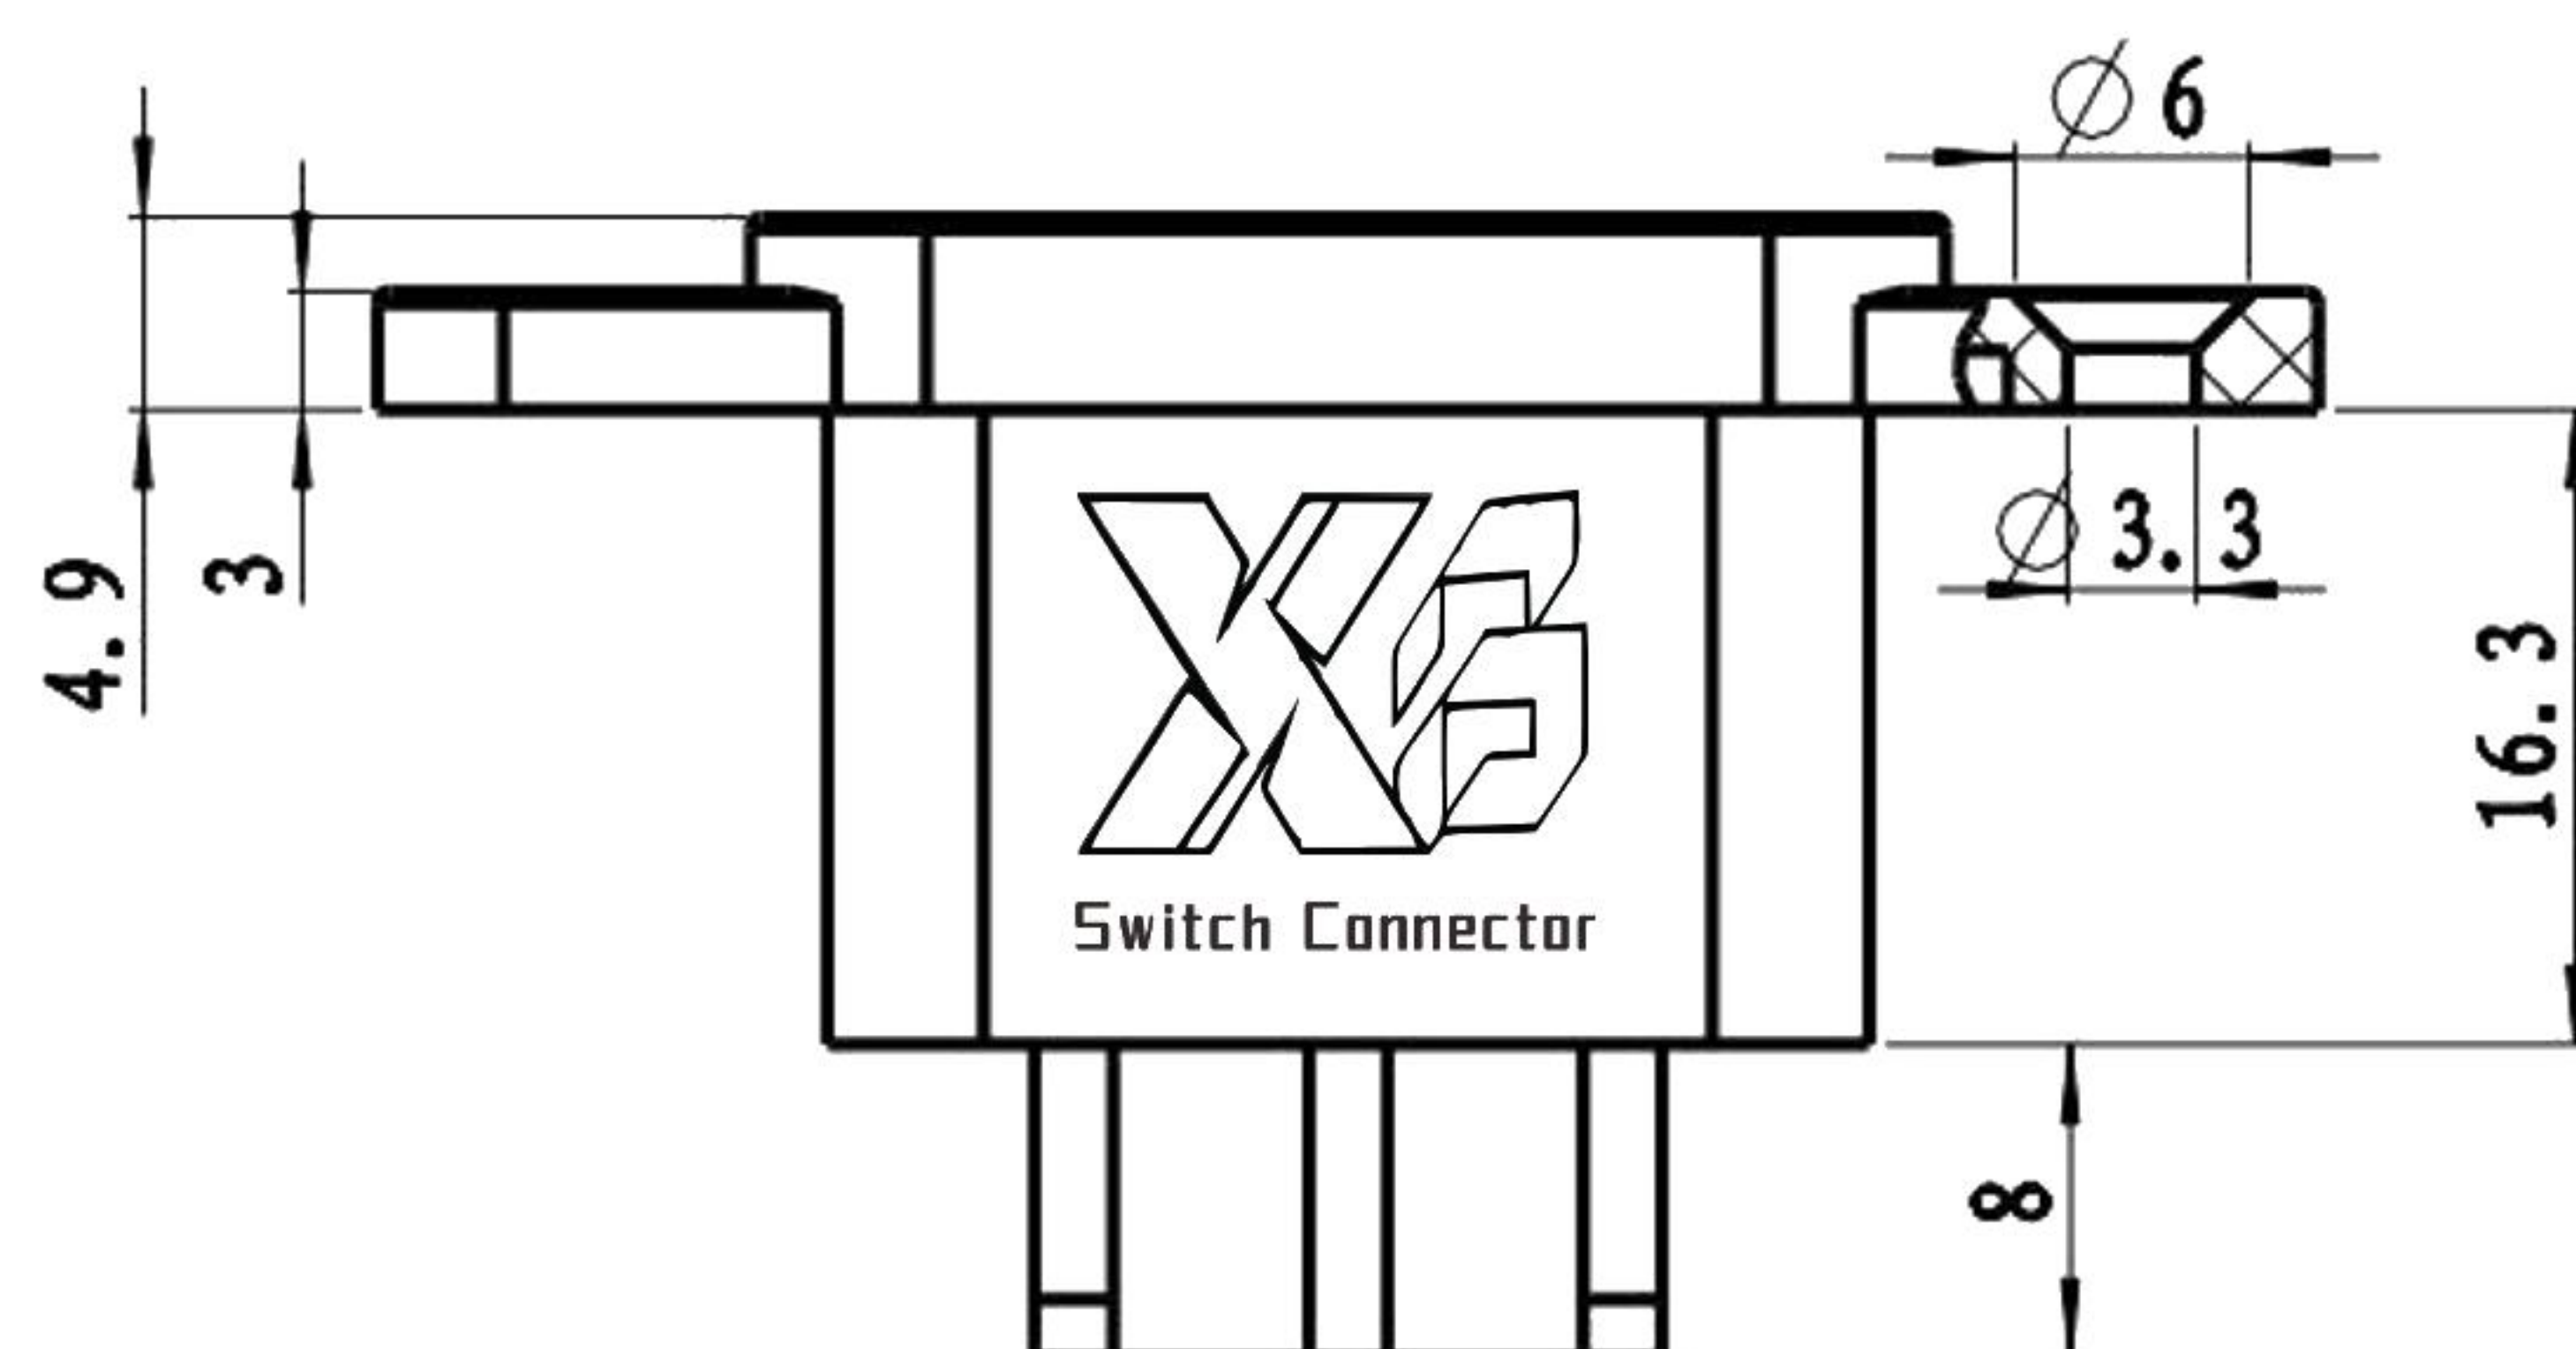

剖面 A-A

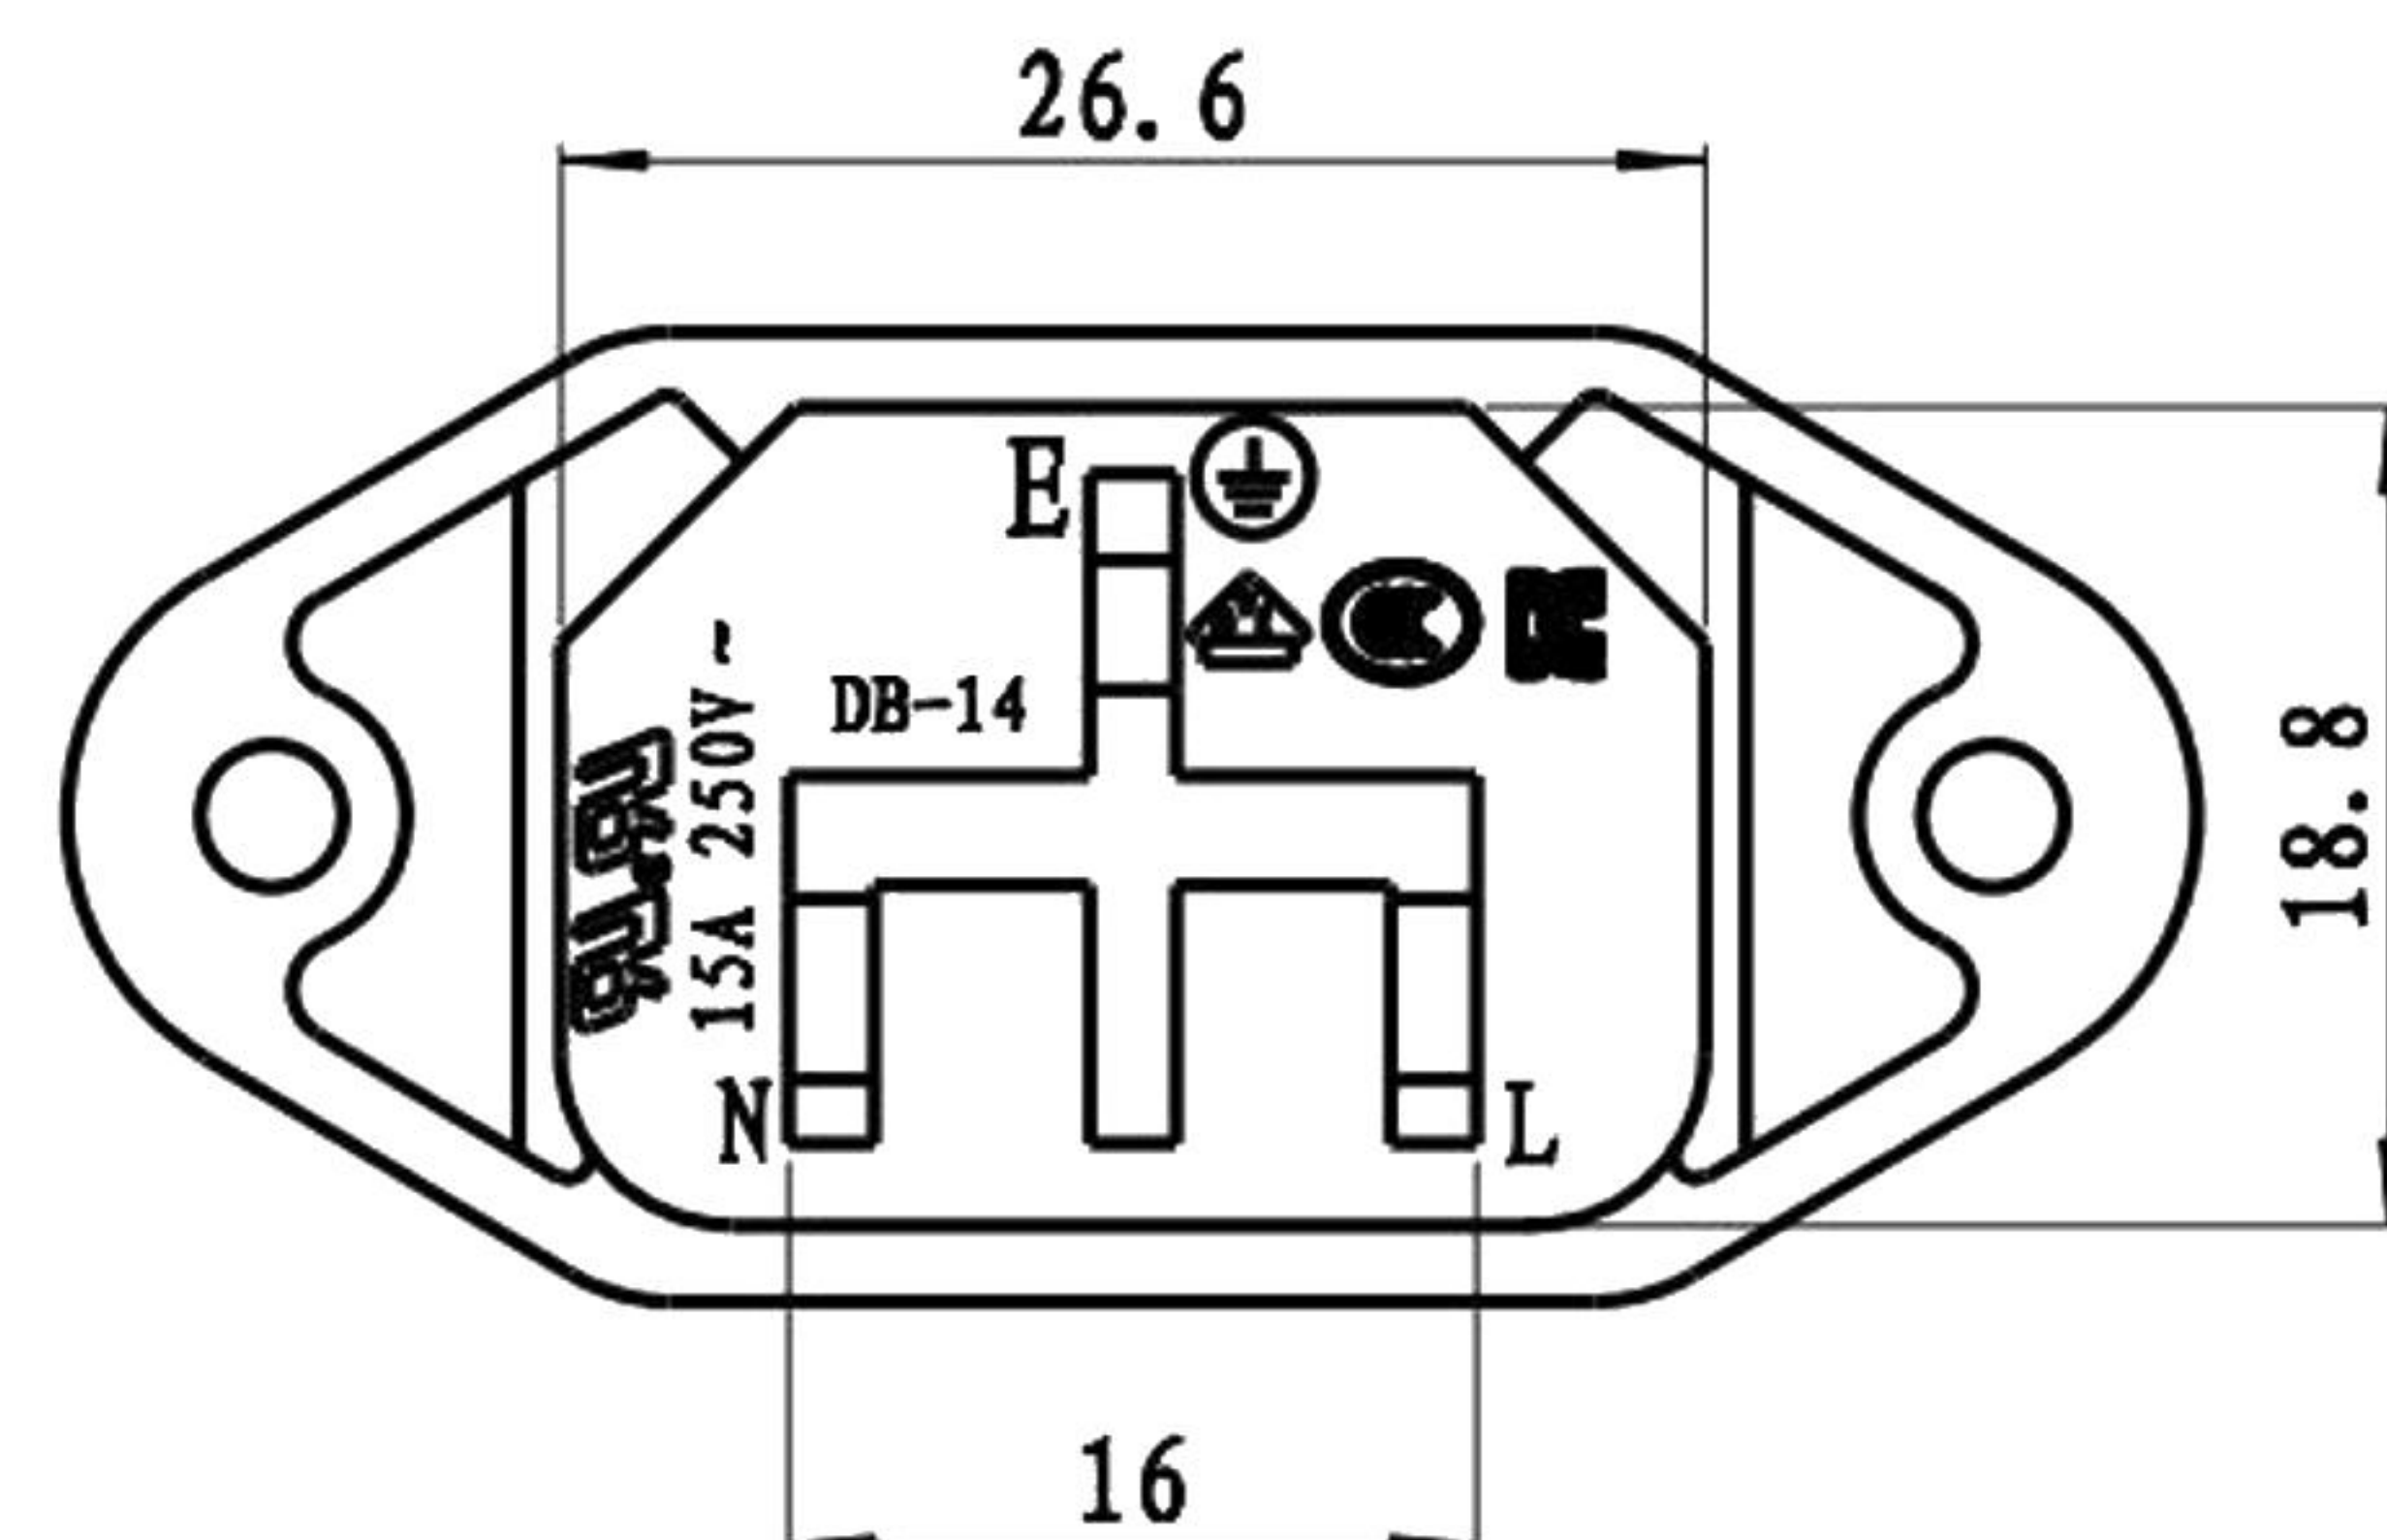

Rating:

15A 250V AC UL cUL

10A 250V AC VDE 3C KC

Insert And Extract Force: 20N~50N

Terminal Strength: ≥60N

Operating Life: ≥6000 cycles

Withstand Voltage: Between all terminals:2500VAC(50-60Hz)1min

Terminals to Base:3750V AC(50-60Hz)1min

Leakage Current:1mA

Insulation Resistance:≥100MΩ 500V DC

Body Material: PBT 94V-2~0

序号	名称	材料	处理	数量	备注
1	DB-14-1D塑料件	环阻PBT	黑色	1	直接注塑成型
2	DB-14-5DL插销	黄铜	镀镍	1	Plating Thickness 40u" -80u"
3	DB-14-5DS插销	黄铜	镀镍	2	Plating Thickness 40u" -80u"

55*43*23.5mm箱, 50只*40袋装=2k件, 净重:26.6 毛重:29.1=KG,

				普通公差:		 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.							
				COMMON TOLERANCE :									
				UP TO 5	±0.20	单位 UNIT	mm	投影 PROJECTED		品名 PRODUCT NAME	AC Inlet C14	比例 SCALE	Free
				ABOVE 5 TO 30	±0.30	绘图 DRAWN BY	金泽杰	核对 CHECKED BY	张龙	型号 MODEL NO.	/DB-14		
				ABOVE 30	±0.50								
REV.	DATE	REVISION DESCRIPTION	ISSUE	ANGULAR	±5°	日期 DATE	2021/12/6	核准 APPROVAL BY	周培雷	料号 PART NO.	DB-14-1D-ZP		