
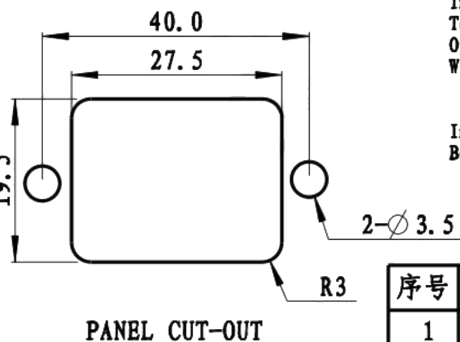
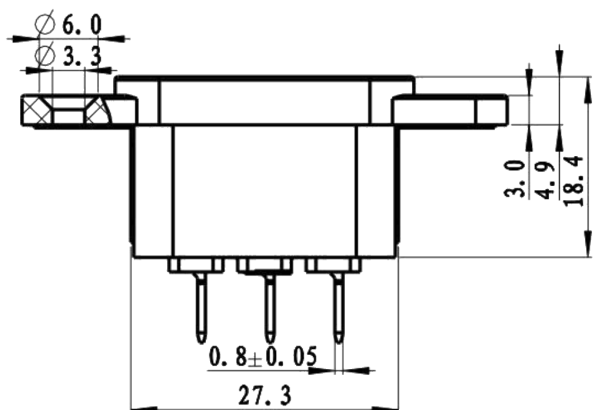
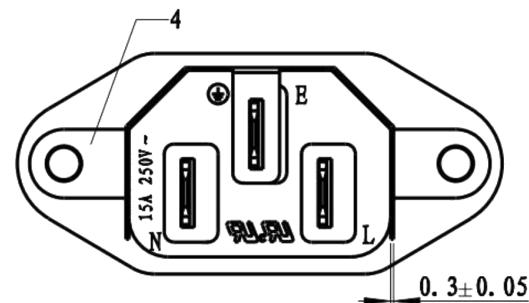
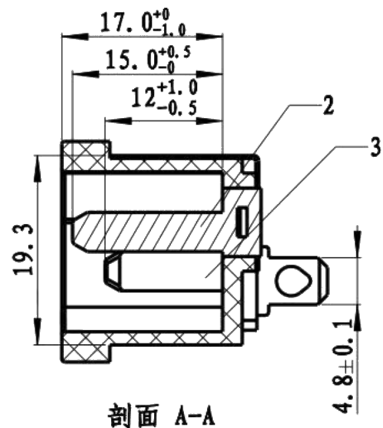


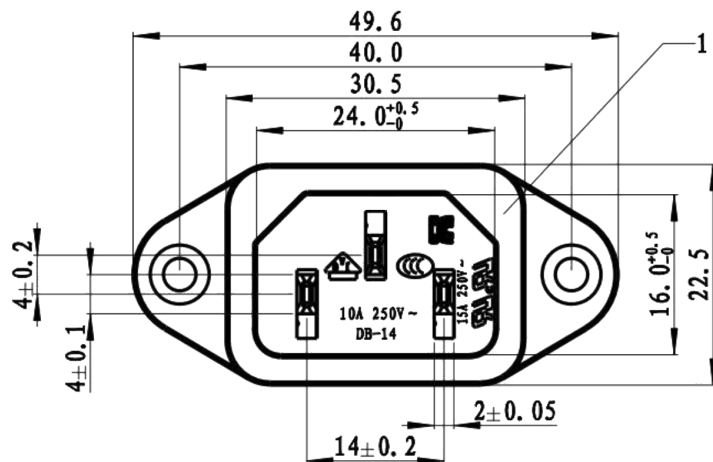

Rating :

15A 250V AC UL cUL

10A 250V AC VDE 3C KC

Insert And Extract Force: 20N~50N

Terminal Strength: ≥60N

Operating Life: ≥6000 cycles

Withstand Voltage: Between all terminals: 2500VAC (50-60Hz) 1min

terminals to Base: 3750V AC (50-60Hz) 1min

Leakage Current: 1mA

Insulation Resistance: >100MΩ 500V DC

Body Material: PBT 94V-2~0

46\*46\*24.5cm箱, 100只\*20袋装=2k件, 净重: 24.2 毛重: 26.2=KG,

| 序号 | 名称          | 材料    | 处理 | 数量 | 备注                          |
|----|-------------|-------|----|----|-----------------------------|
| 1  | DB-14-1塑料件  | 环阻PBT | 黑色 | 1  |                             |
| 2  | DB-14-FL插销  | 黄铜    | 镀锡 | 1  | Plating Thickness 40u"~80u" |
| 3  | DB-14-FS插销  | 黄铜    | 镀镍 | 2  | Plating Thickness 40u"~80u" |
| 4  | DB-14-D05铁架 | 锰铜    | 镀镍 | 1  | Plating Thickness 40u"~80u" |

普通公差:

COMMON TOLERANCE :

UP TO 5 ±0.20

ABOVE 5 TO 30 ±0.30

ABOVE 30 ±0.50

ANGULAR ±5°

单位

mm

绘图

CHECKED BY

日期

2022/4/6



东莞市溪榜电子有限公司

DONG GUAN XI BANG ELECTRONICS CO., LTD.

投影



核 对

CHECKED BY

核 准

APPROVAL BY

品 名

Ac Inlet C14型

比 例

Free

料 号

PART NO.

XB-DB-14-1F-ZP-X

SCALE

MODEL NO.

2022/4/6

张 华

同 培 南

REV. DATE REVISION DESCRIPTION ISSUE