


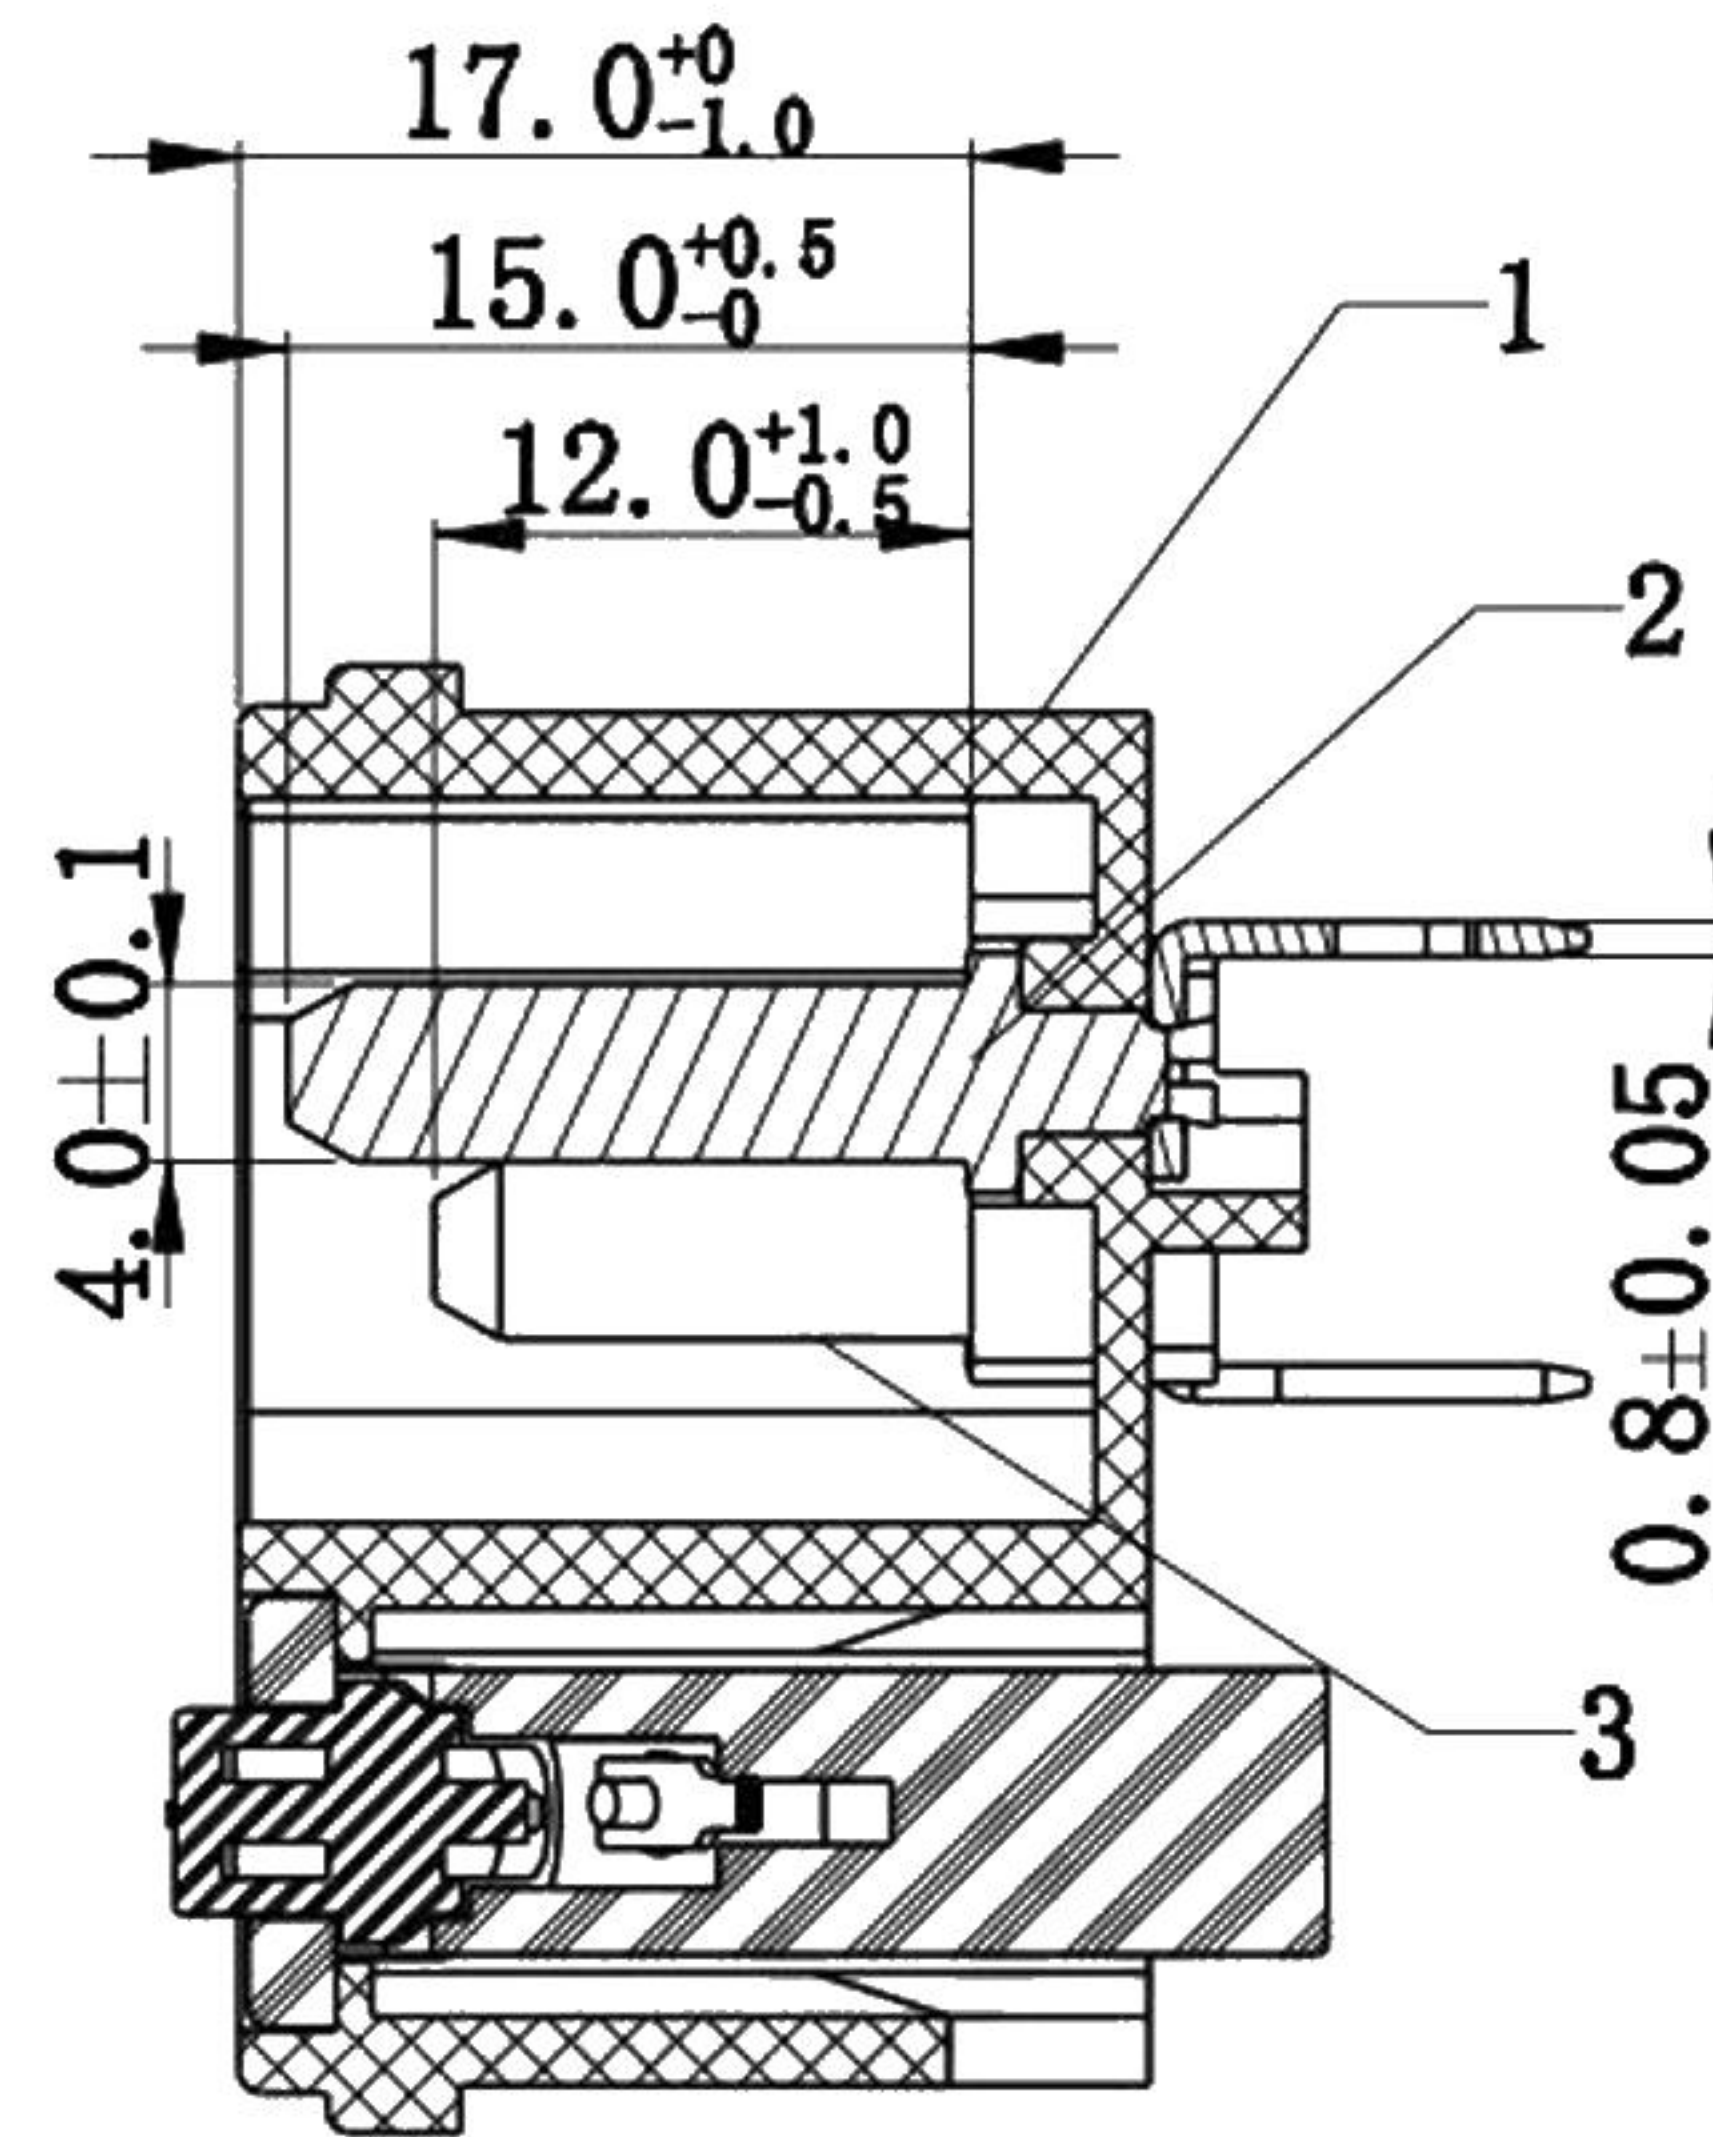


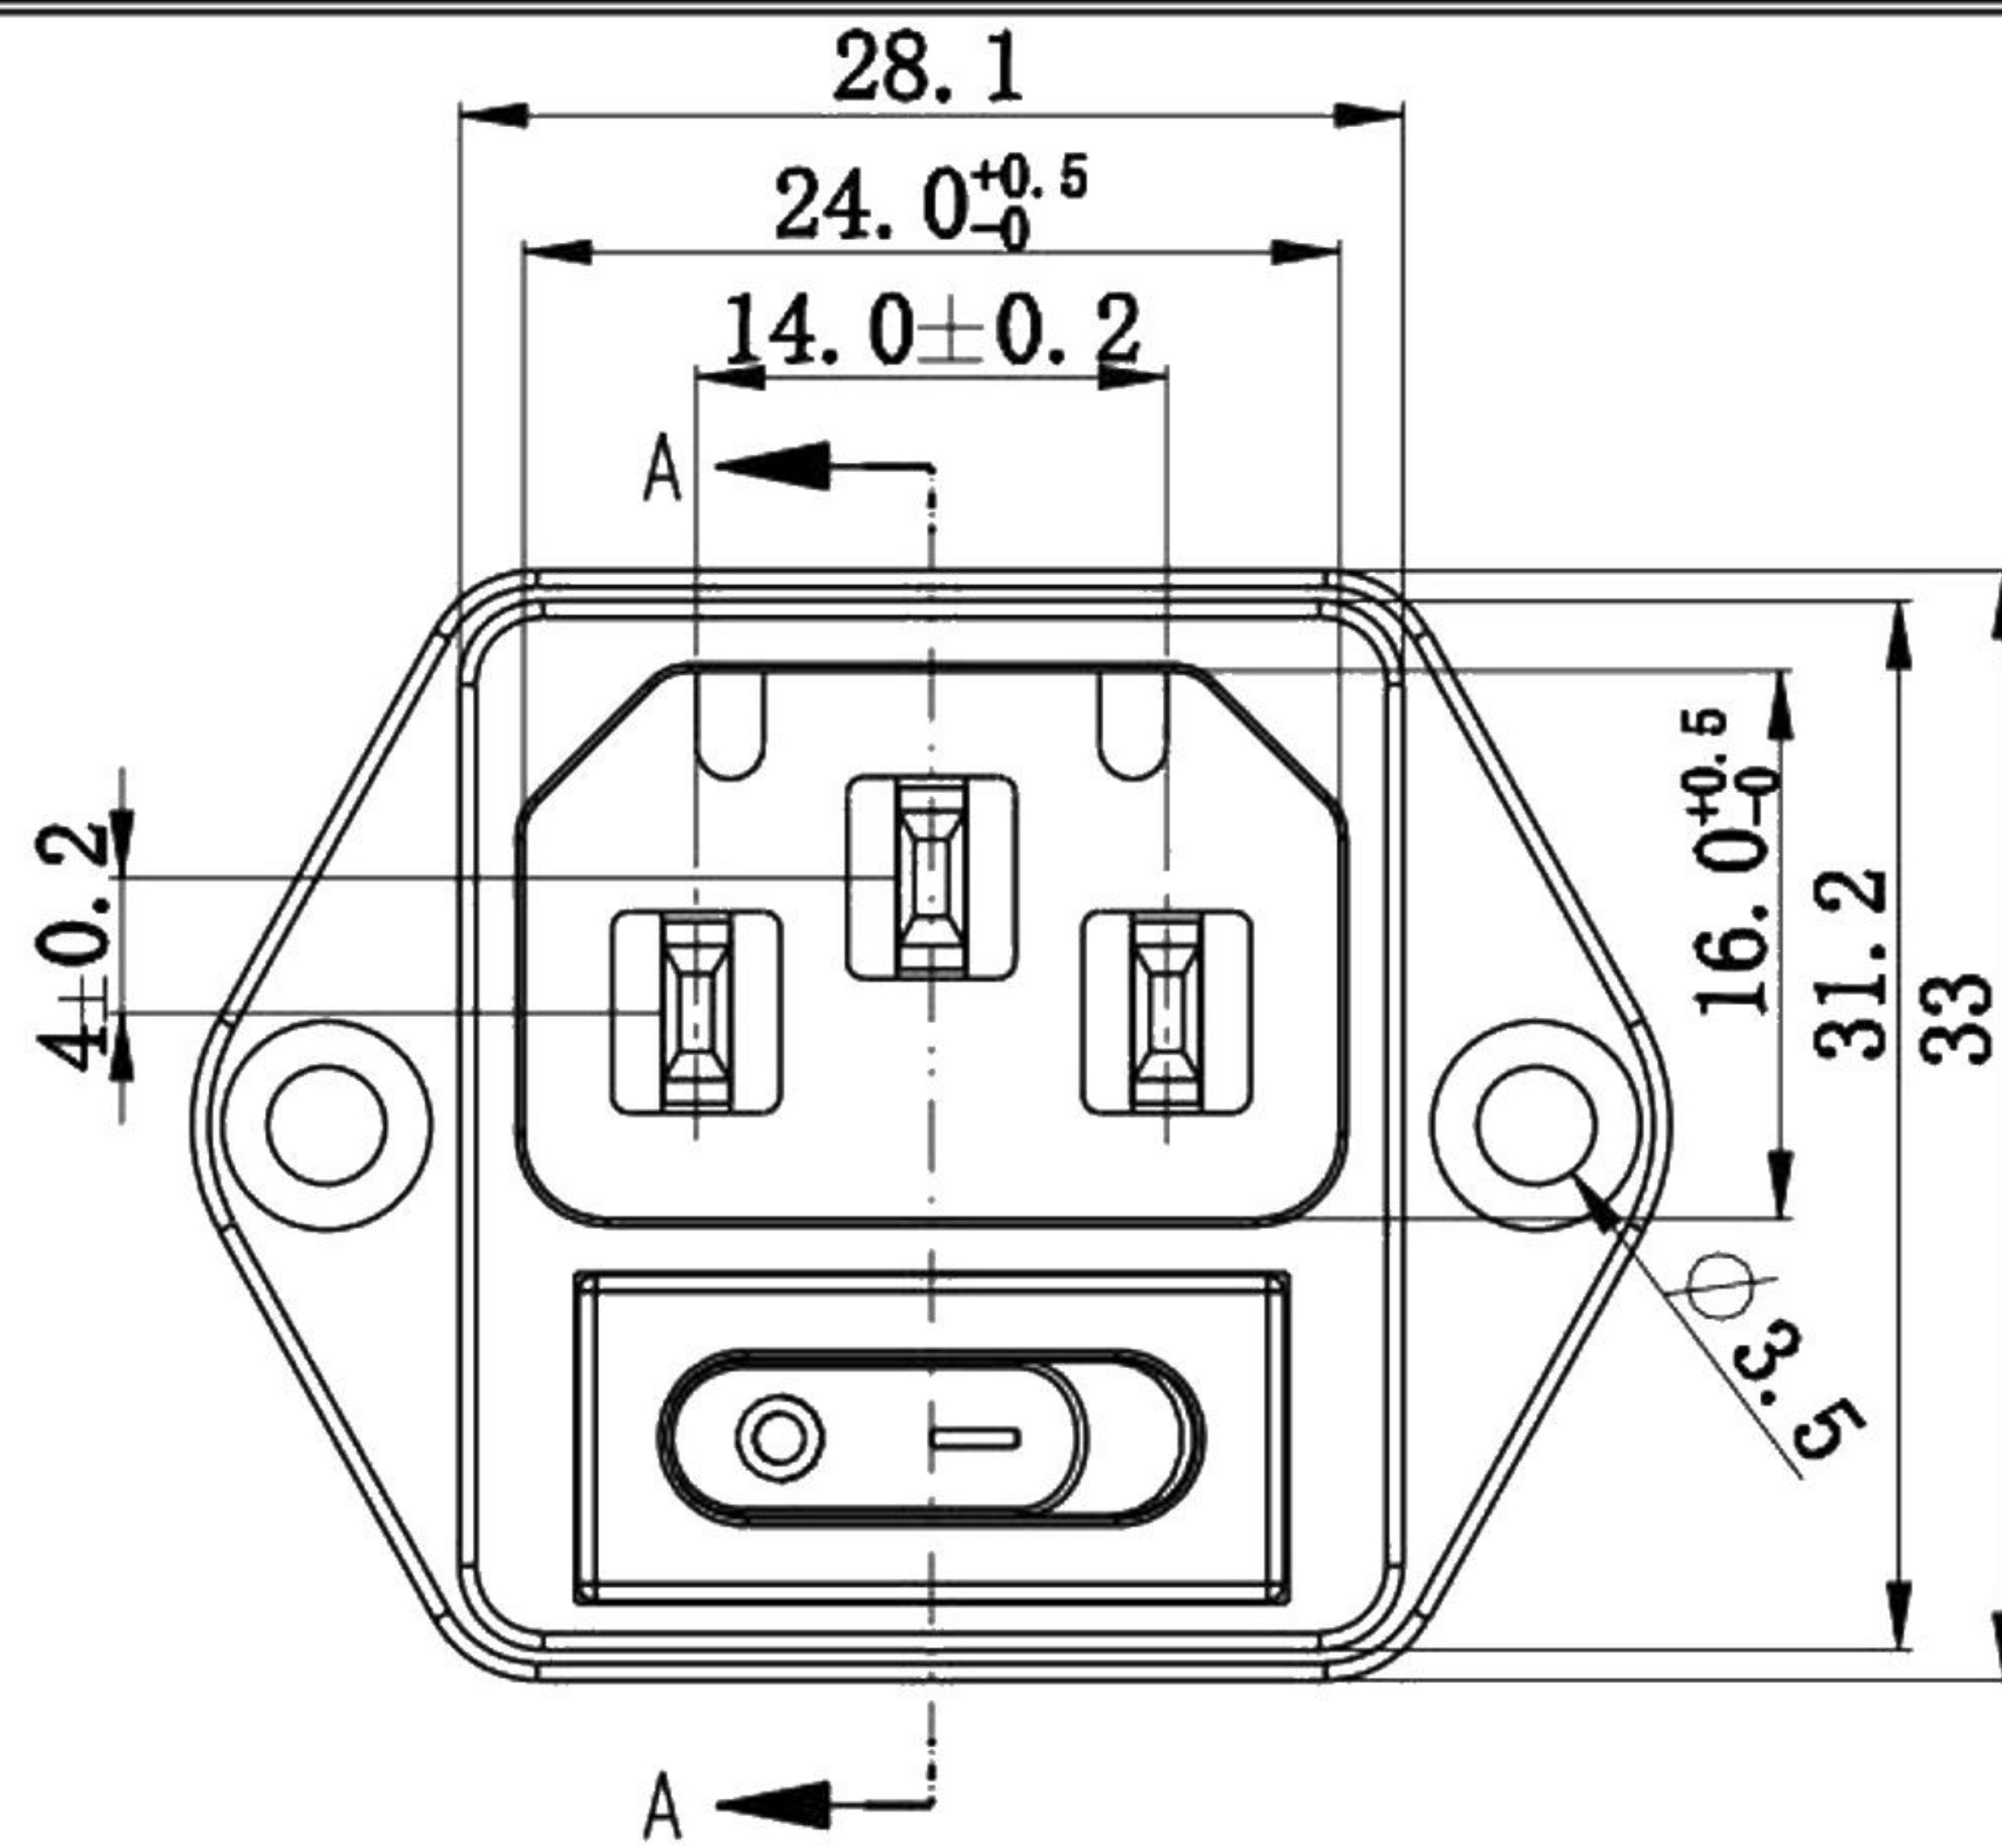

剖面 A-A

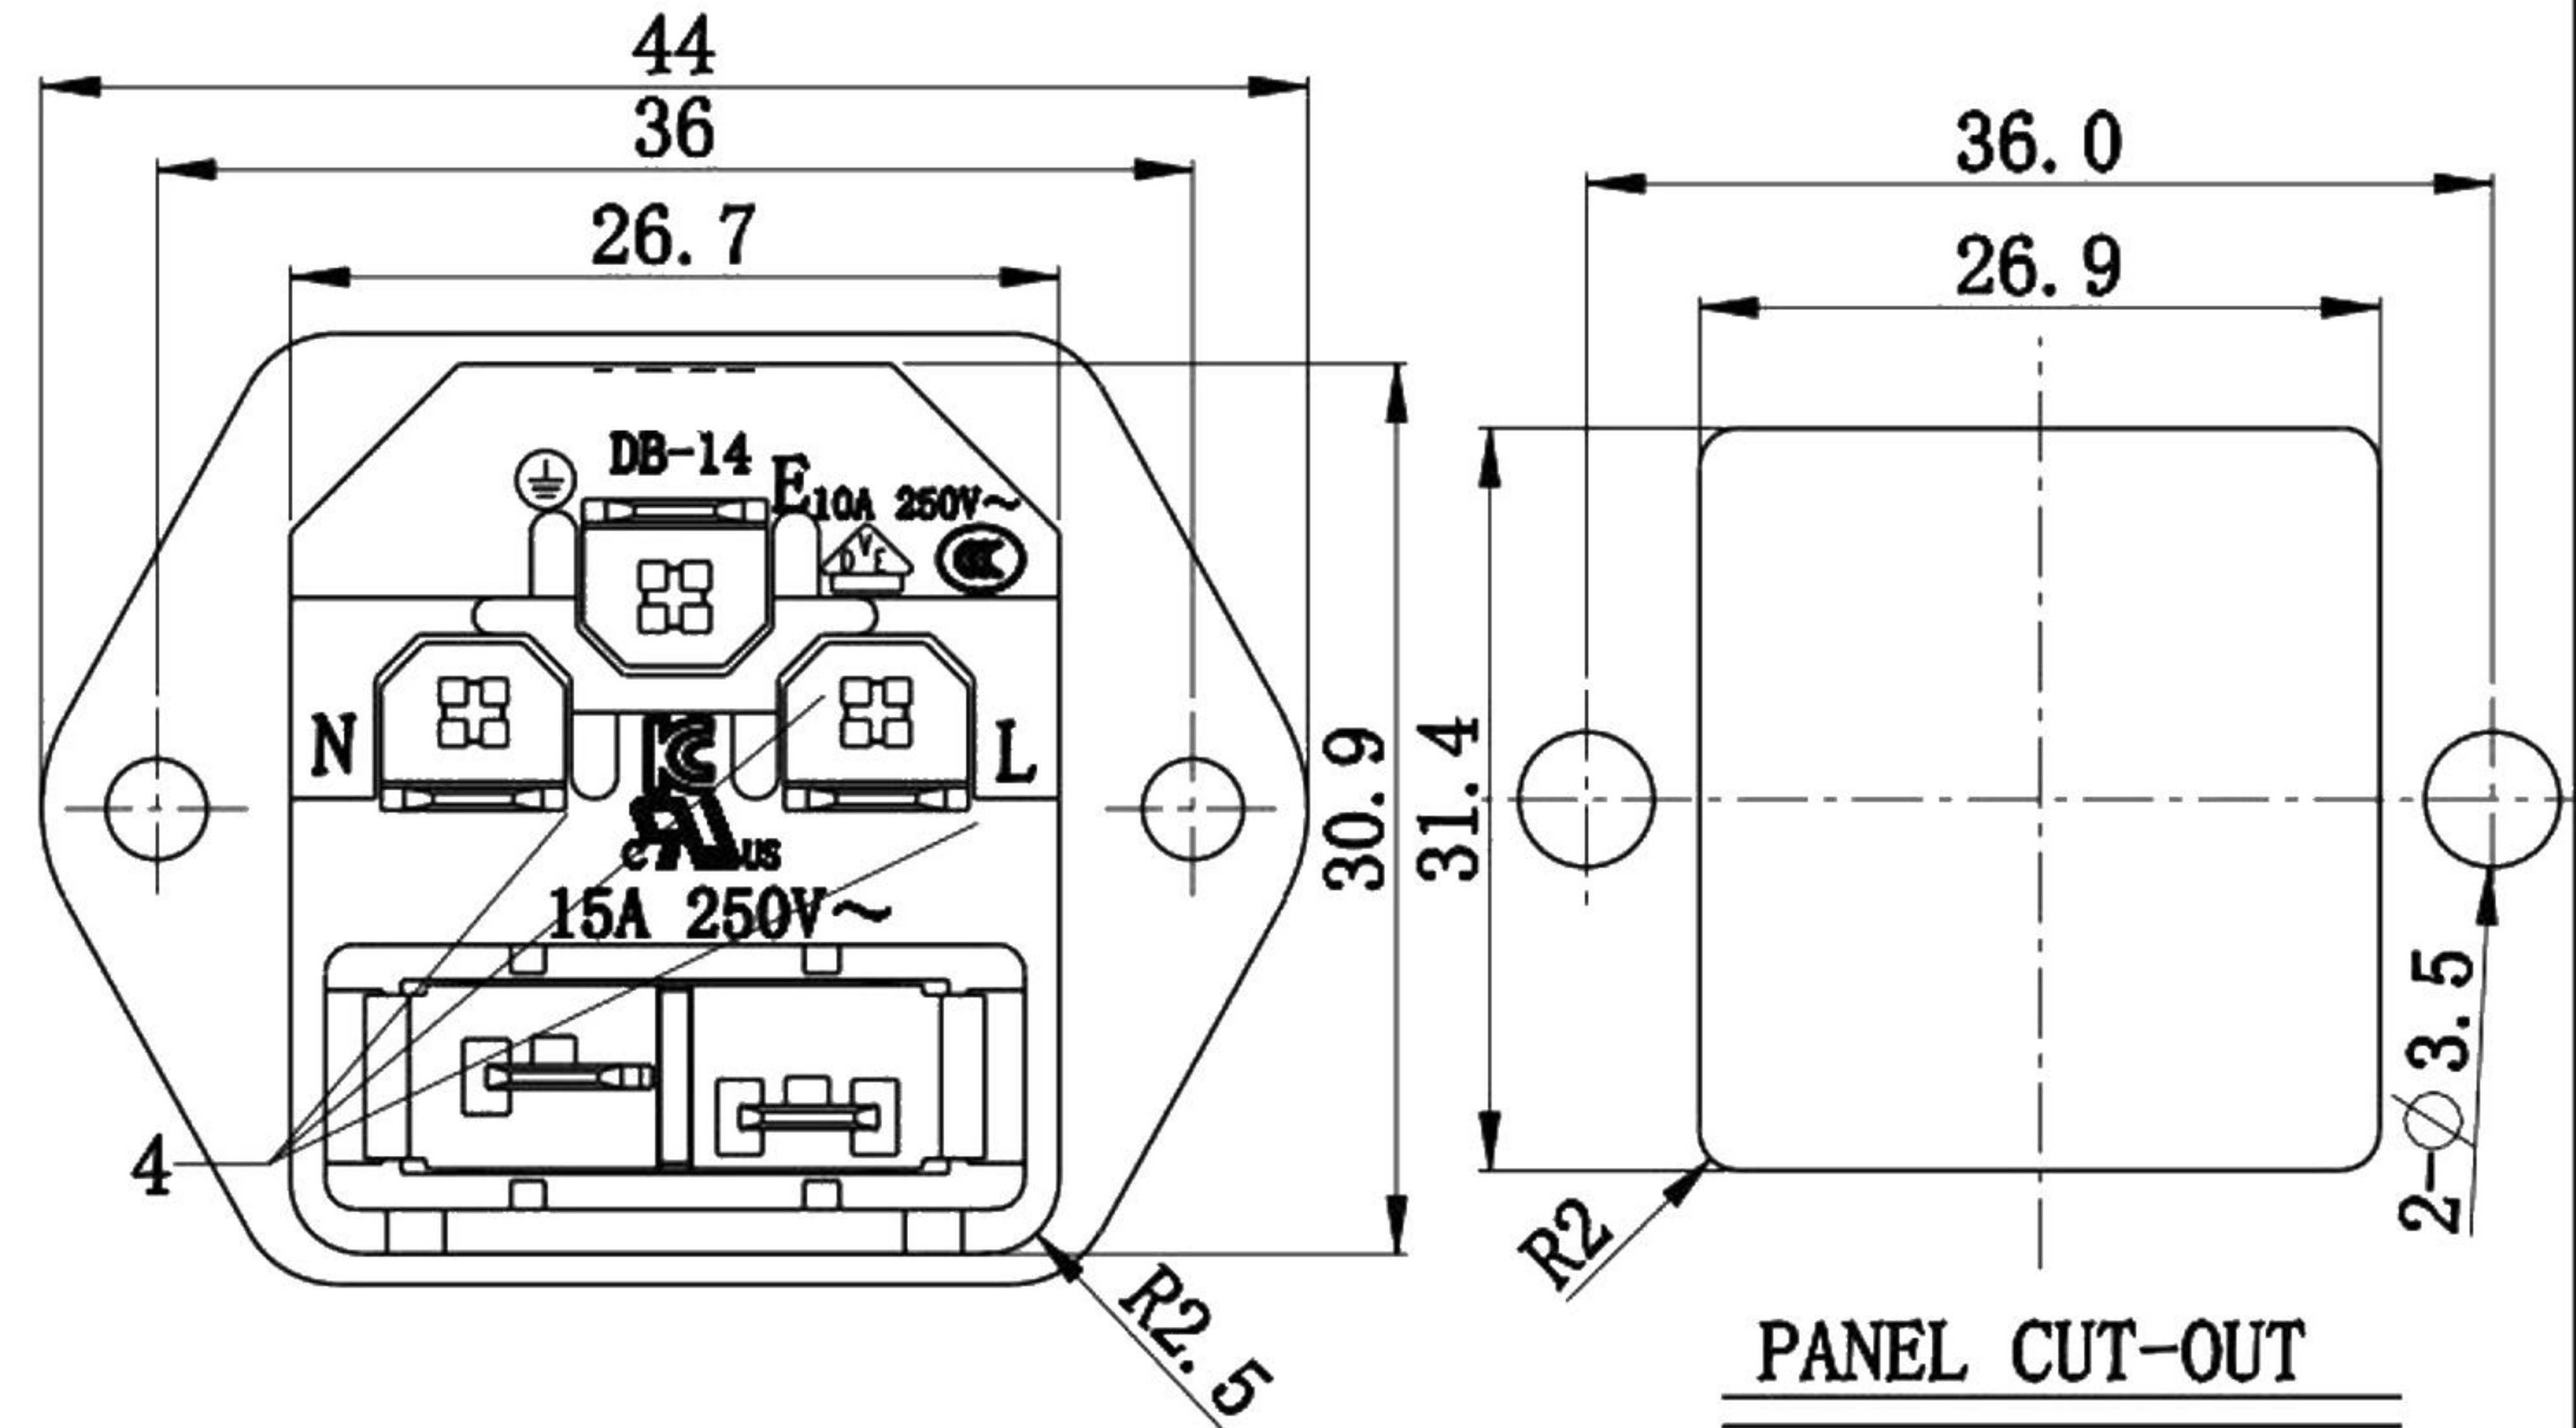

PANEL CUT-OUT

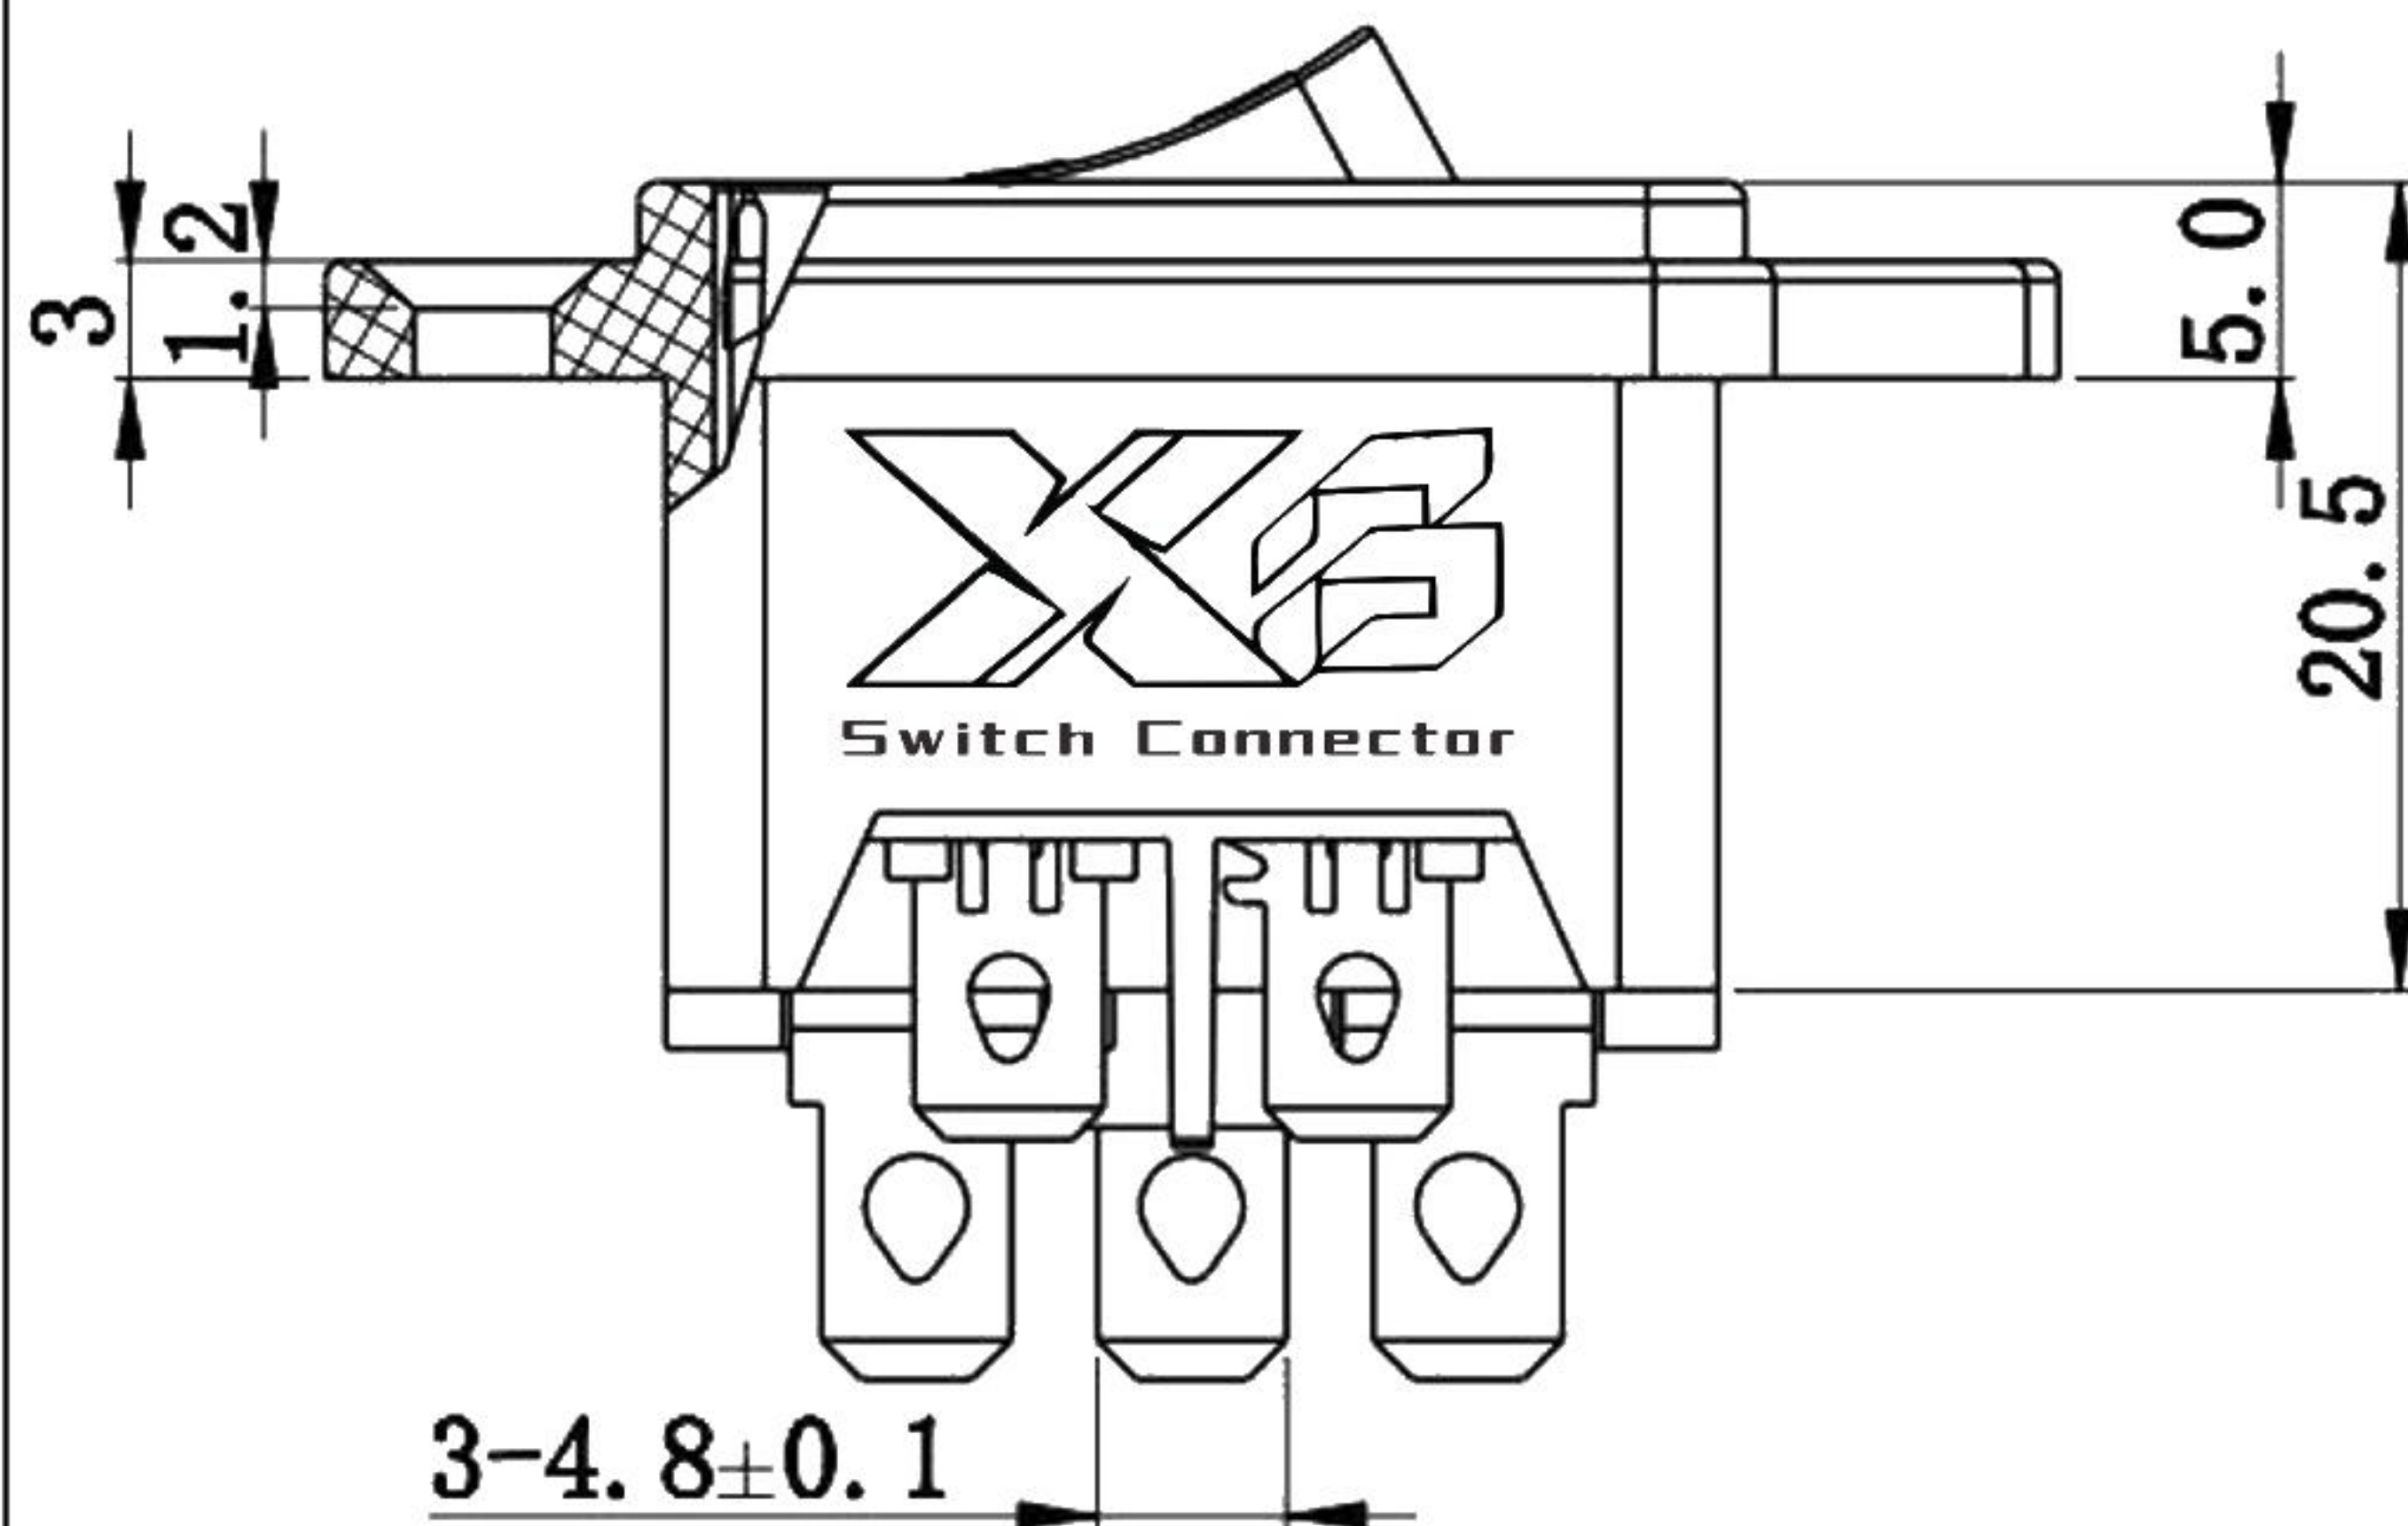

剖面 B-B

NOTES:

1. Rating:

CQC 6A 250V AC 6(8)A 250V AC
8A/128A 250V AC T105/55
UL cUL 10GPA 125V AC
6GPA 250V AC
T105/55 TV-5
VDE ENEC 6(4)A 250V AC T85/55
KC 6(4)A 250V AC T85/55
TUV 8/128A 250VAC T85/55

2. Circuit Diagram: 2P ON-OFF

3. Terminal Strength: ≥80N

4. Electrical life: ≥10000 cycles

5. Withstand Voltage: Withstand Voltage: 1500VAC 1min
Terminals to Button: 3000VAC 1min
Leakage Current: 1mA

6. Current resistance: ≤50mΩ (initial)

7. Insulation resistance: ≥100MΩ

8. Body Material: NYLON 66 94V-0~2

Rating:

15A 250V AC UL cUL

10A 250V AC VDE 3C KC

Insert And Extract Force: 20N~50N

Terminal Strength: ≥60N

Operating Life: ≥6000 cycles

Withstand Voltage: Between all terminals: 2500VAC (50-60Hz) 1min

Terminals to Base: 3750V AC (50-60Hz) 1min

Leakage Current: 1mA

Insulation Resistance: ≥100MΩ 500V DC

Body Material: PBT 94V-2~0

序号	名称	材料	处理	数量	备注
1	DB-14-1P+RS塑料件	PBT	黑色	1	
2	DB-14-FC插销	黄铜	镀镍	1	
3	DB-14-FD插销	黄铜	镀镍	2	
4	DB-14-D端子	黄铜	镀锡	3	

55*43*23.5cm箱, 50只*22袋装=1.1K件, 净重: 18.8 KG, 毛重: 21.8=KG,

普通公差:

COMMON TOLERANCE :

UP TO 5 ±0.20

ABOVE 5 TO 30 ±0.30

ABOVE 30 ±0.50

ANGULAR ±5°

单位

UNIT

绘图

DRAWN BY

日期

DATE

mm

投影

PROJECTED

核对

CHECKED BY

核准

APPROVAL BY



东莞市溪榜电子有限公司

DONG GUAN XI BANG ELECTRONICS CO., LTD.

品名

PRODUCT NAME

型号

MODEL NO.

料号

PART NO.

AC Inlet C14

比例

SCALE

/DB-14

DB-14-1P-DD+RS601D1-1010011BB-ZP

Free

REV. DATE REVISION DESCRIPTION ISSUE