

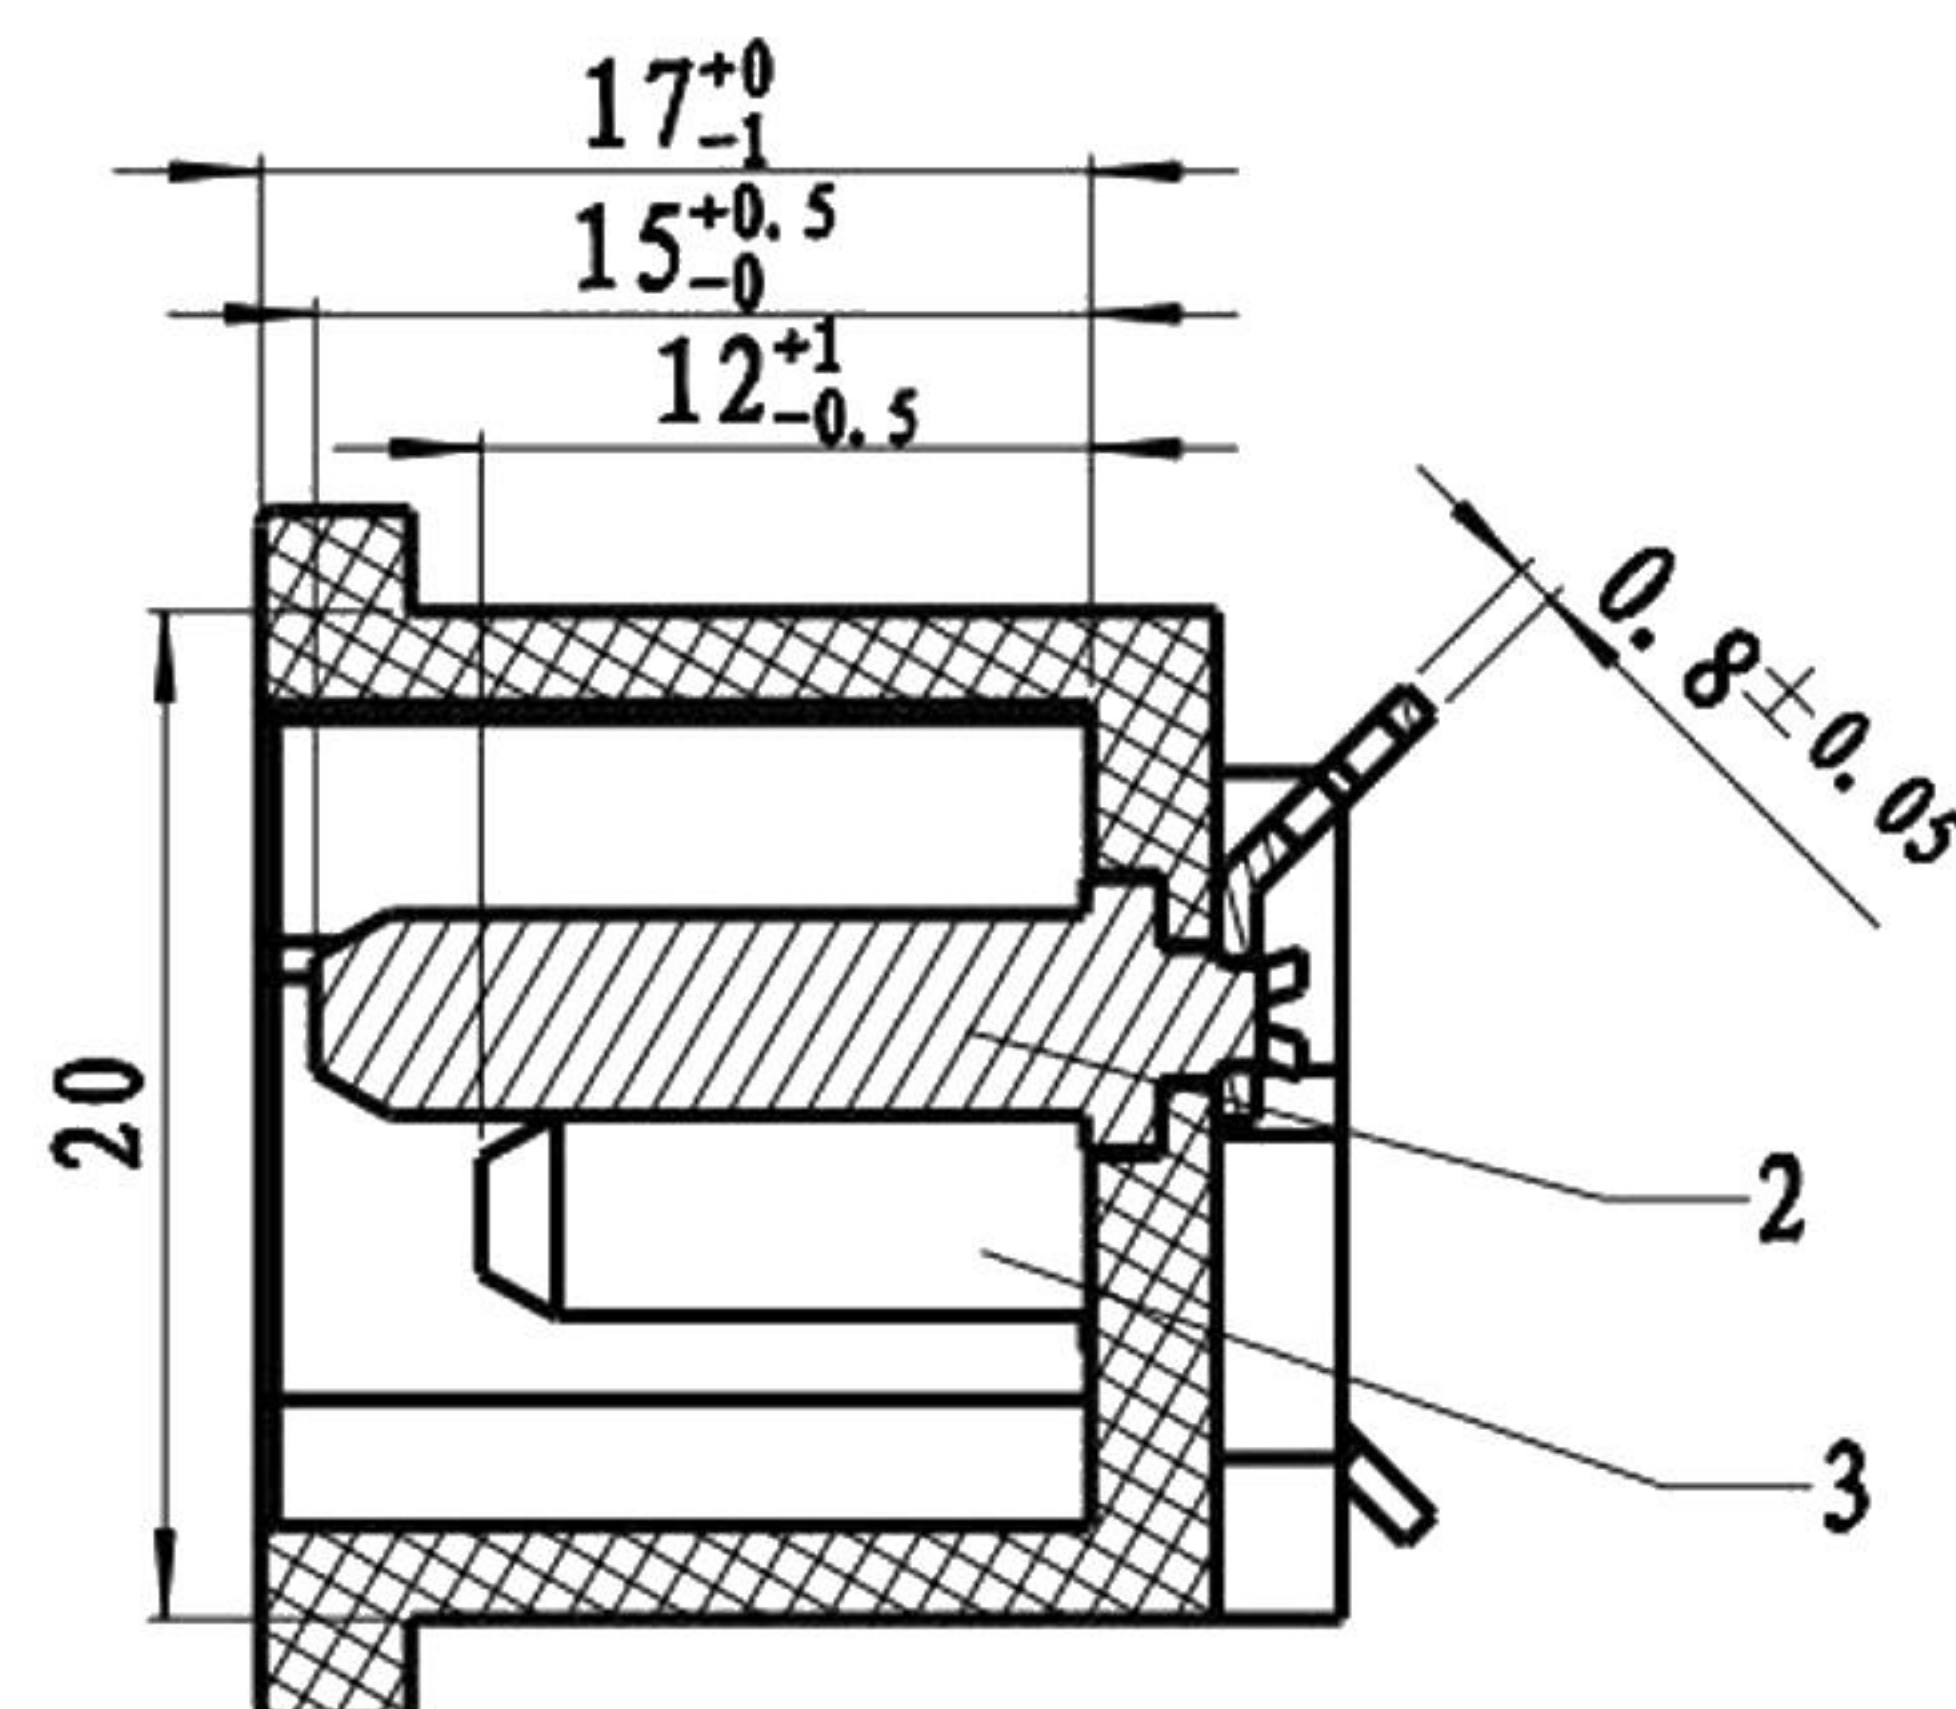
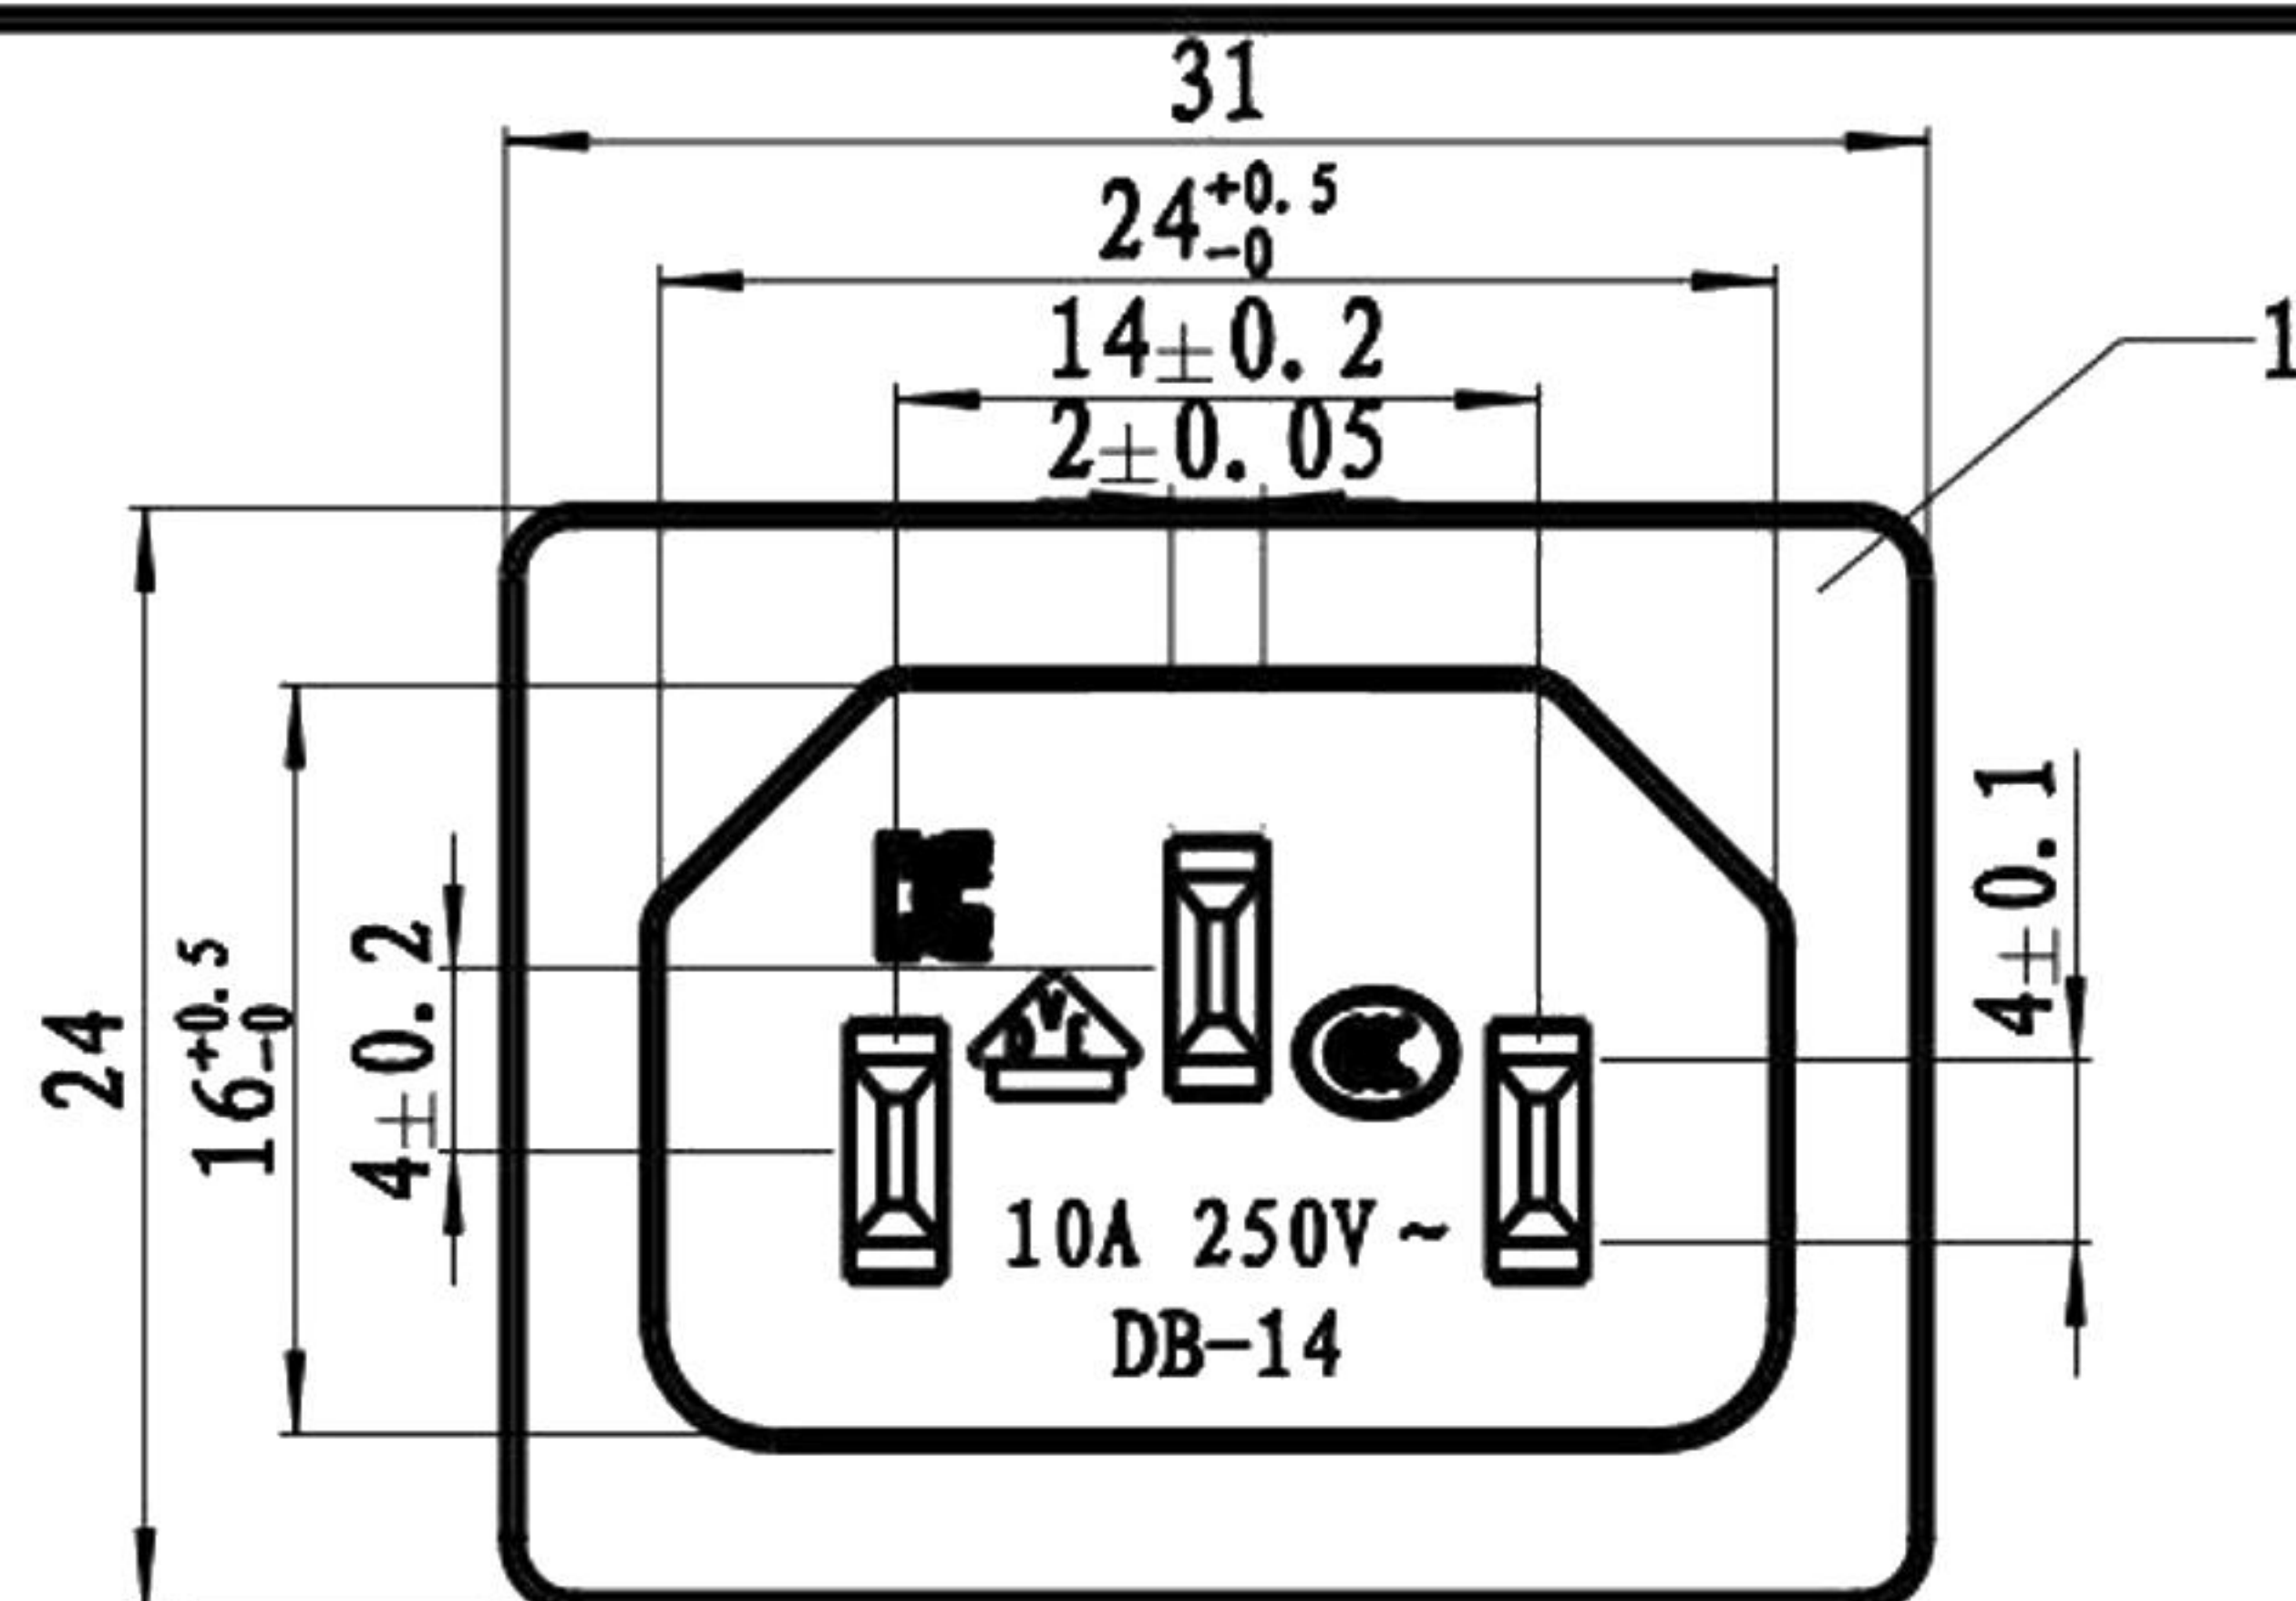
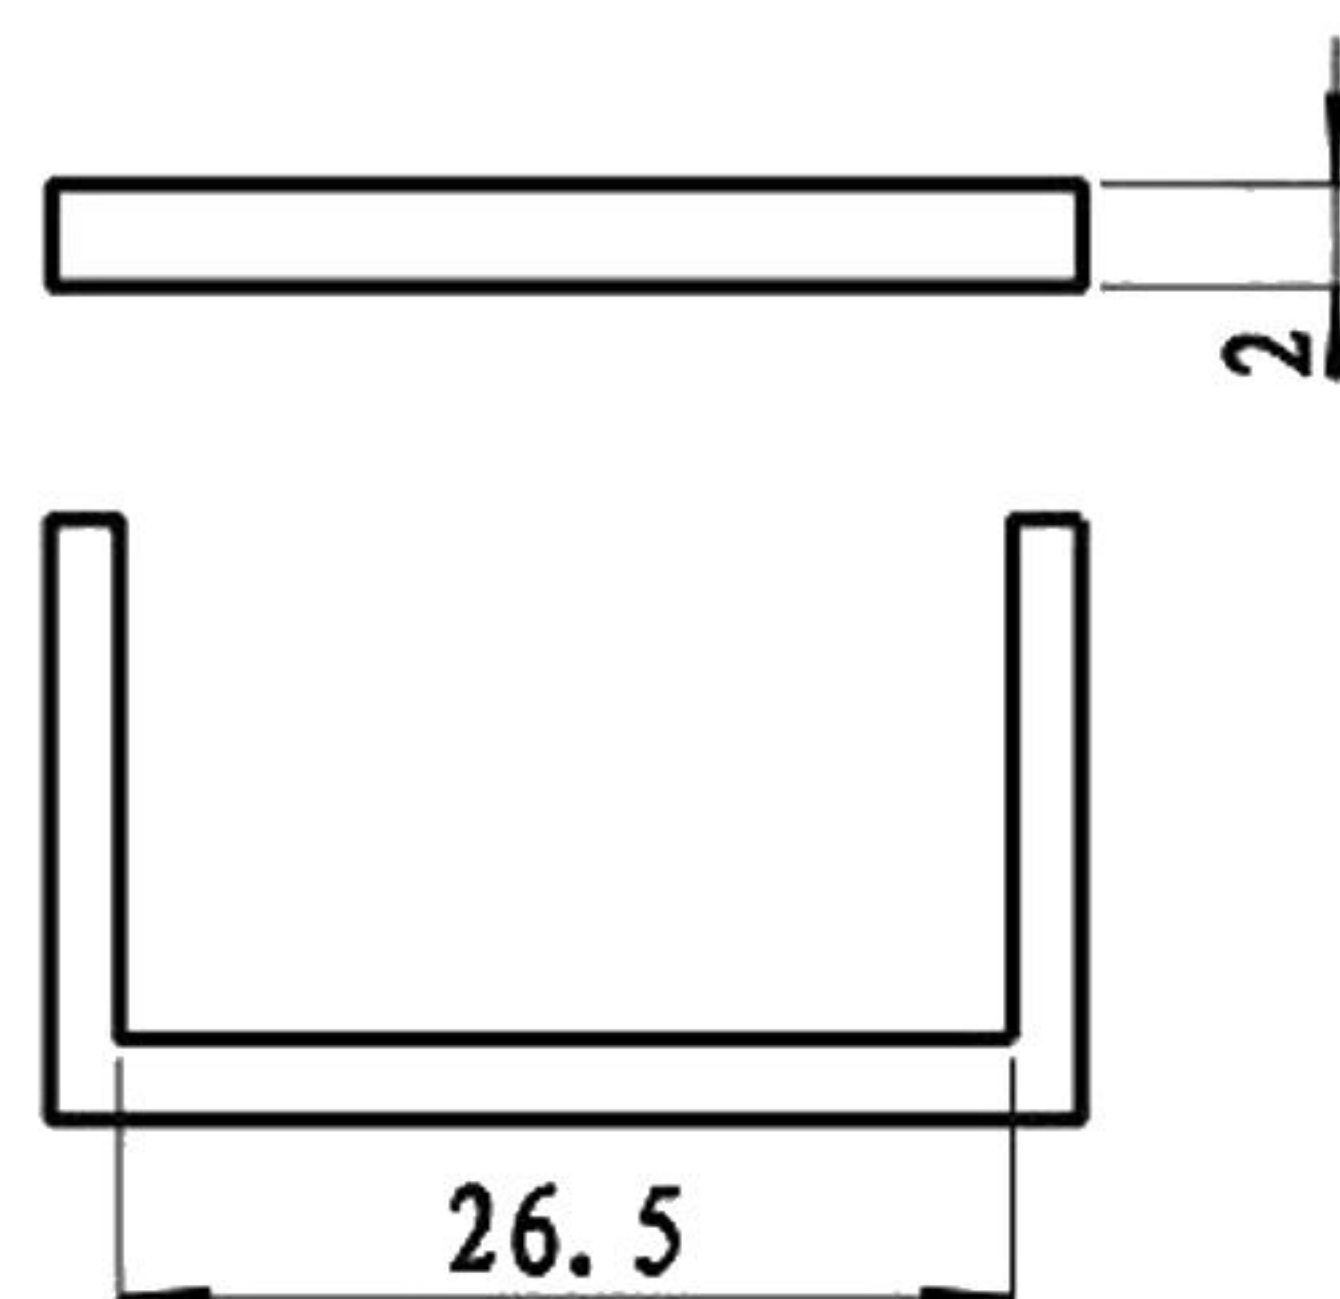


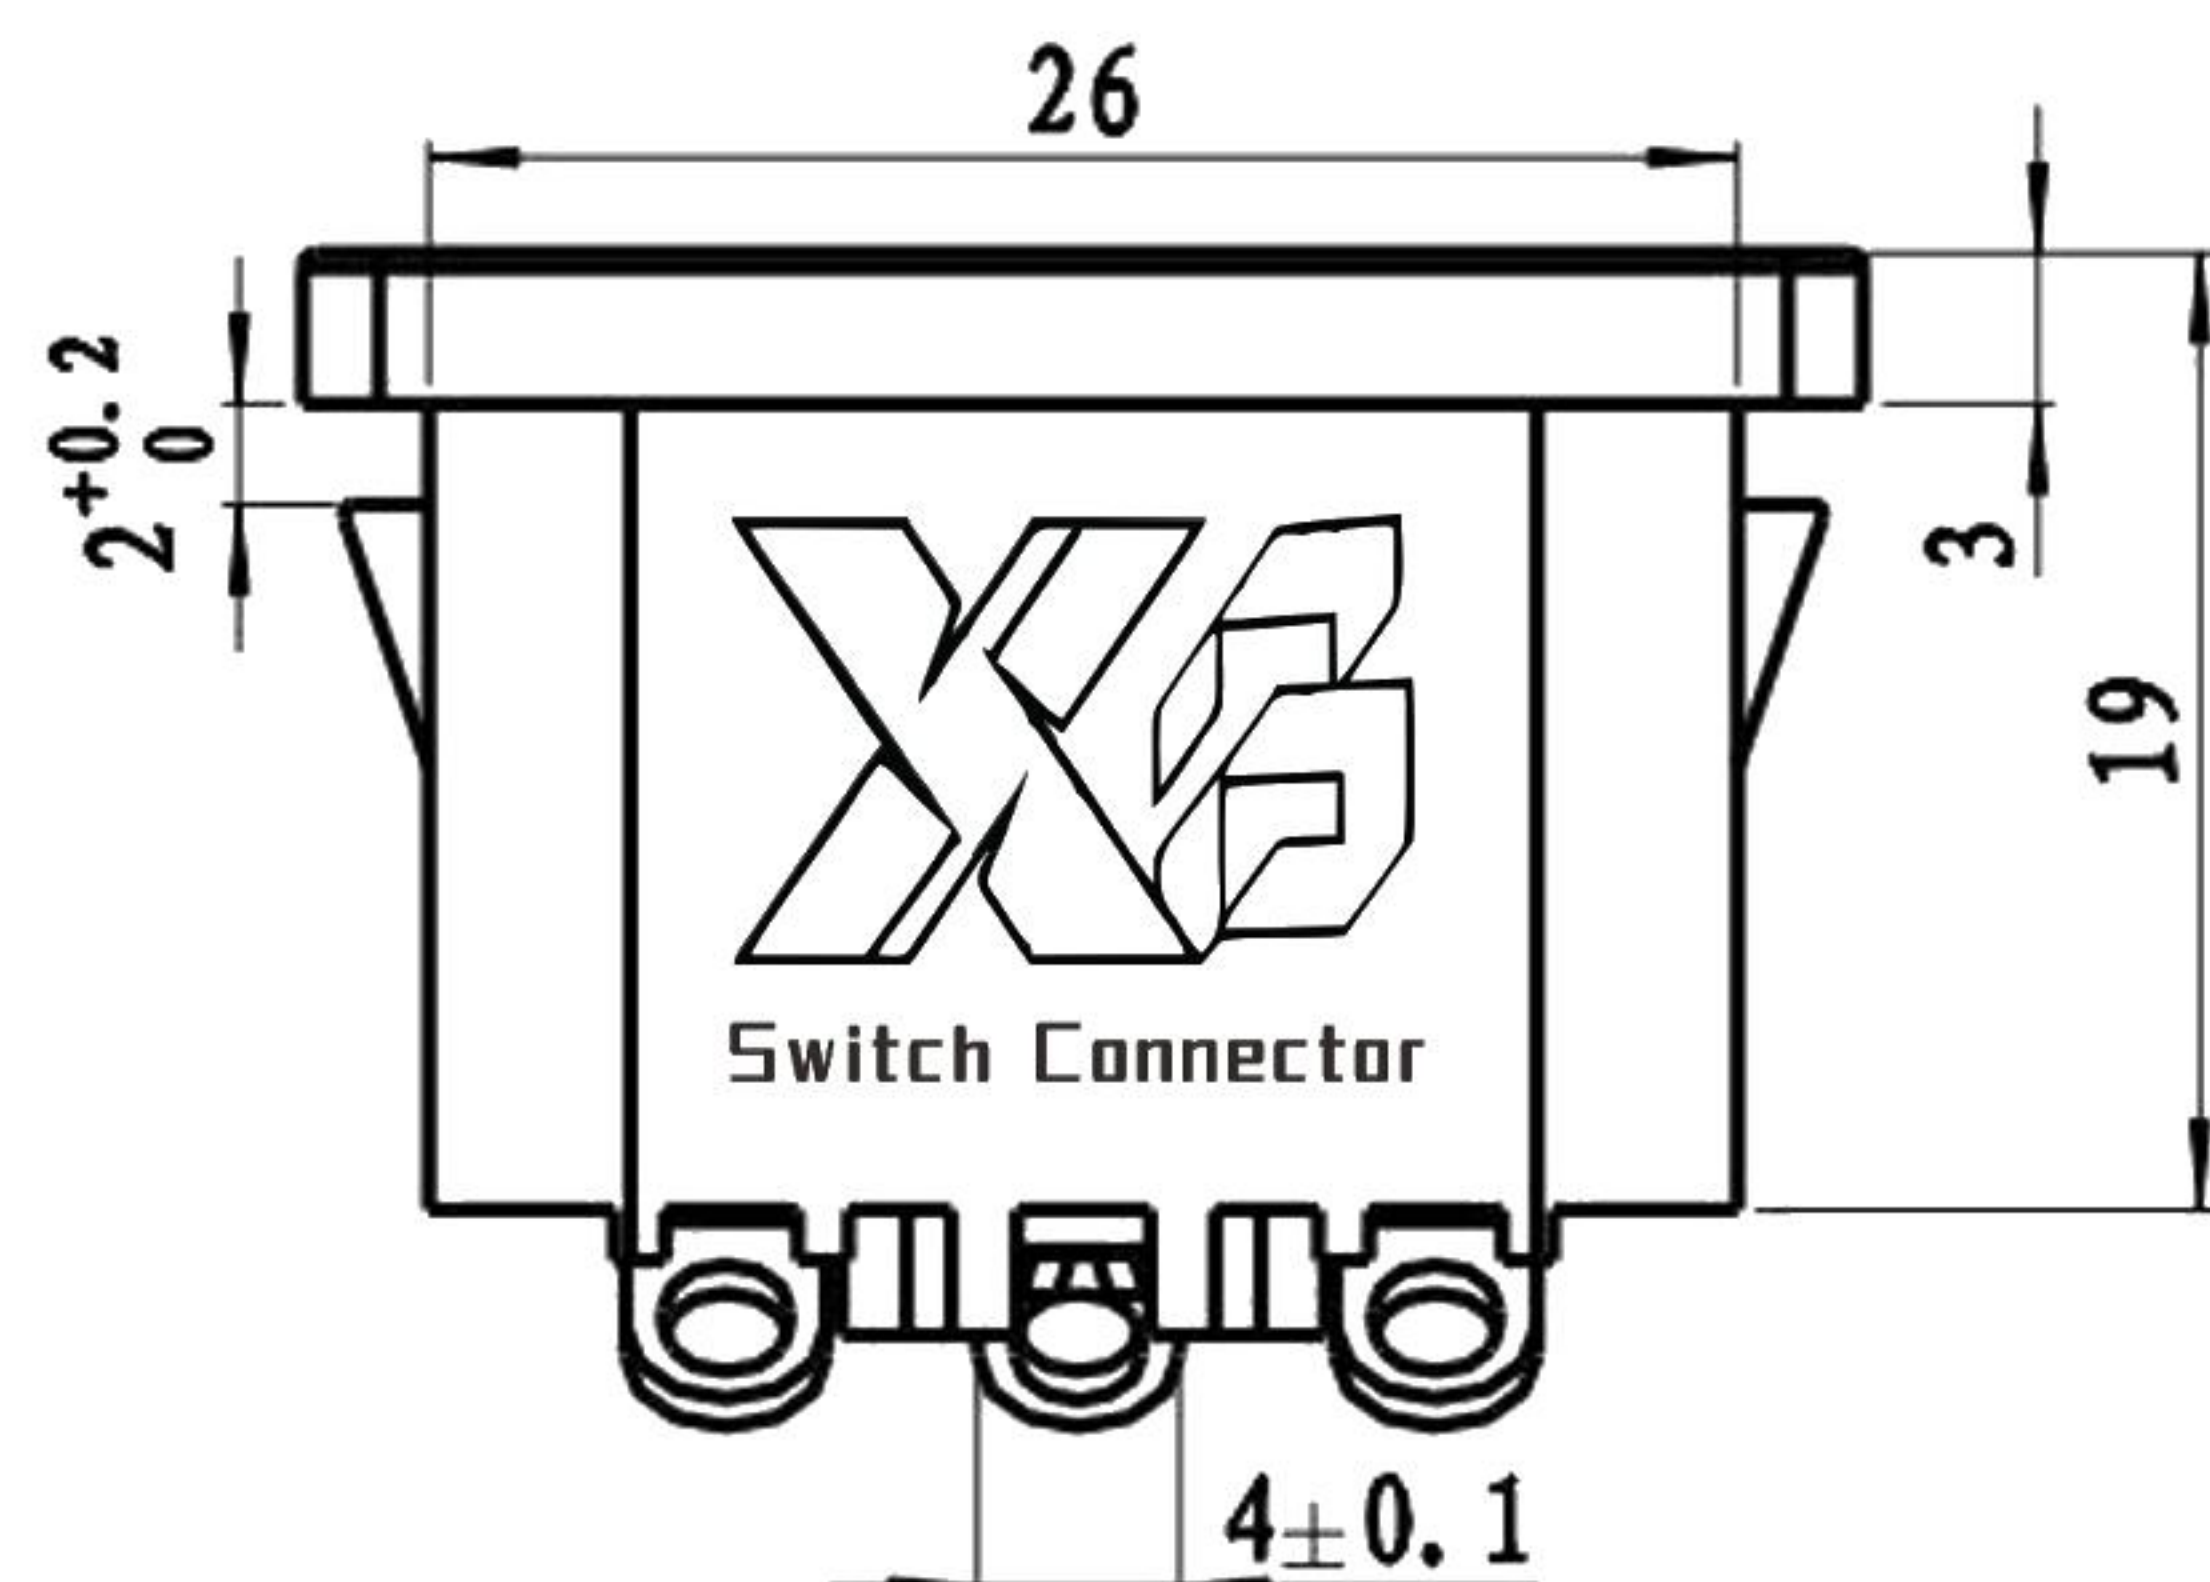

剖面 A-A

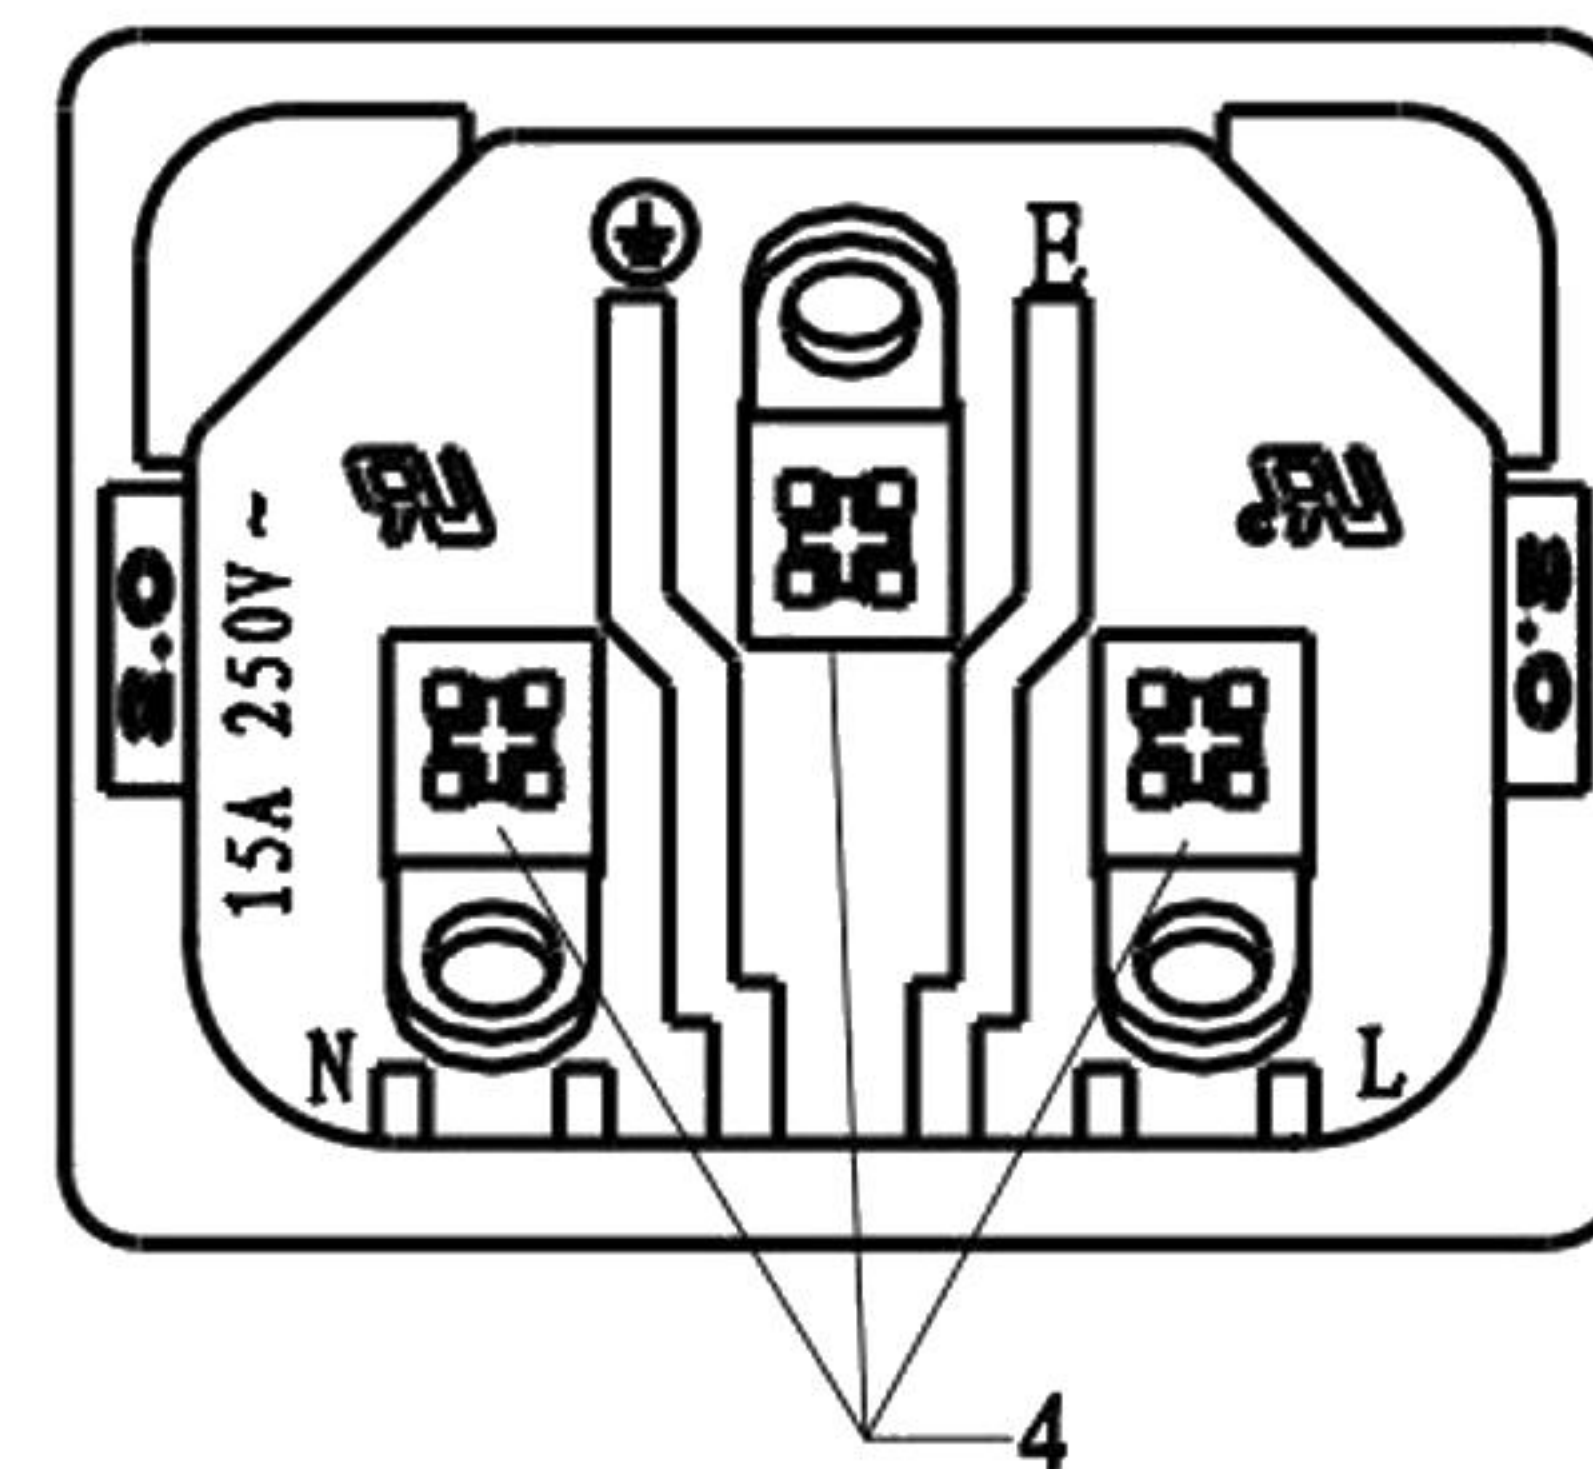

PANEL CUT-OUT

Rating:

15A 250V AC UL cUL

10A 250V AC VDE 3C KC

Insert And Extract Force: 20N~50N

Terminal Strength: >60N

Operating Life: >6000 cycles

Withstand Voltage: Between all terminals: 2500VAC (50-60Hz) 1min

Terminals to Base: 3750V AC (50-60Hz) 1min

Leakage Current: 1mA

Insulation Resistance: >100MΩ 500V DC

Body Material: PBT 94V-2~0

序号	名称	材料	处理	数量	备注
1	DB-14-3P塑料件	PBT	黑色	1	
2	DB-14-PL (L) 长插销	黄铜	镀镍	1	
3	DB-14-PS (S) 短插销	黄铜	镀镍	2	
4	DB-14-QB端子	黄铜	镀锡	3	

55*43*23.5cm箱, 50只*40袋装=2k件, 净重: 17.6 毛重: 20.6=KG,

				普通公差:		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.							
				COMMON TOLERANCE :									
				UP TO 5	±0.20	单位 UNIT	mm	投影 PROJECTED		品名 PRODUCT NAME	Ac Inlet C14型	比例 SCALE	Free
				ABOVE 5 TO 30	±0.30	绘图 DRAWN BY	金泽杰	核对 CHECKED BY	张华龙	型号 MODEL NO.	/DB-14		
				ABOVE 30	±0.50	日期 DATE	2022/6/21	核准 APPROVAL BY	周培雷	料号 PART NO.	DB-14-3P-QBQB (2.0)-ZP		
REV.	DATE	REVISION DESCRIPTION	ISSUE	ANGULAR	±5°								