
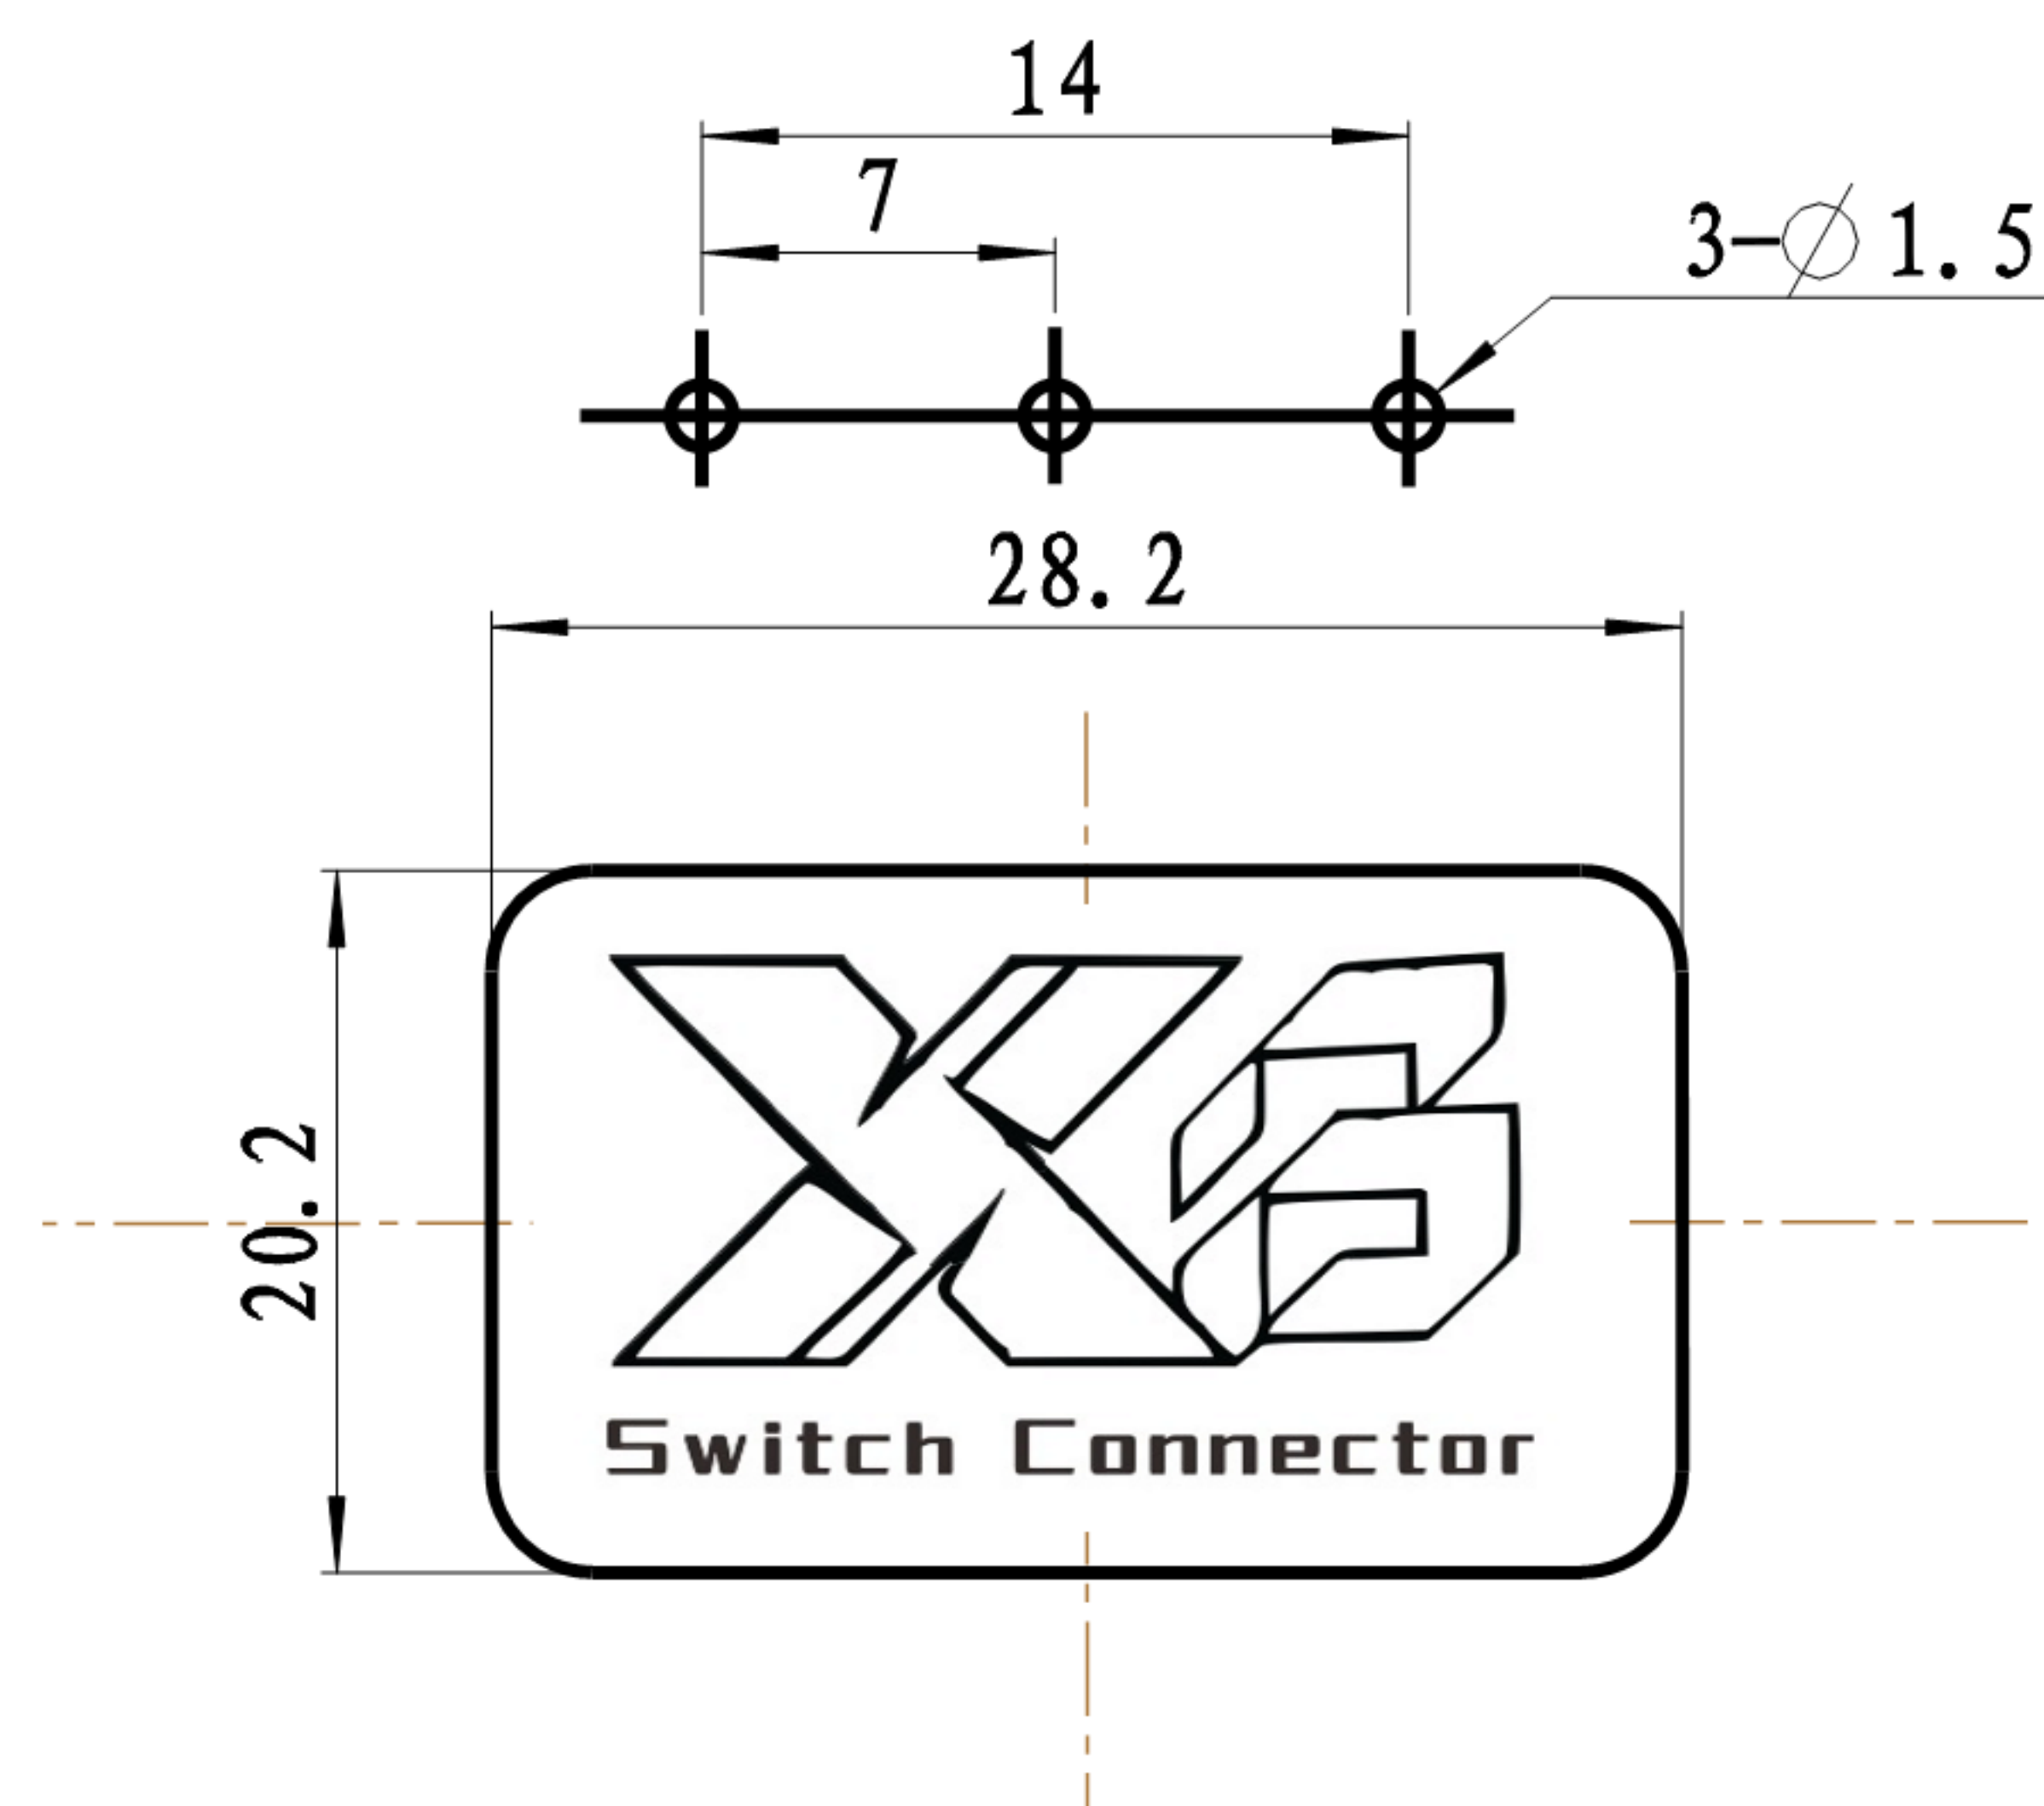
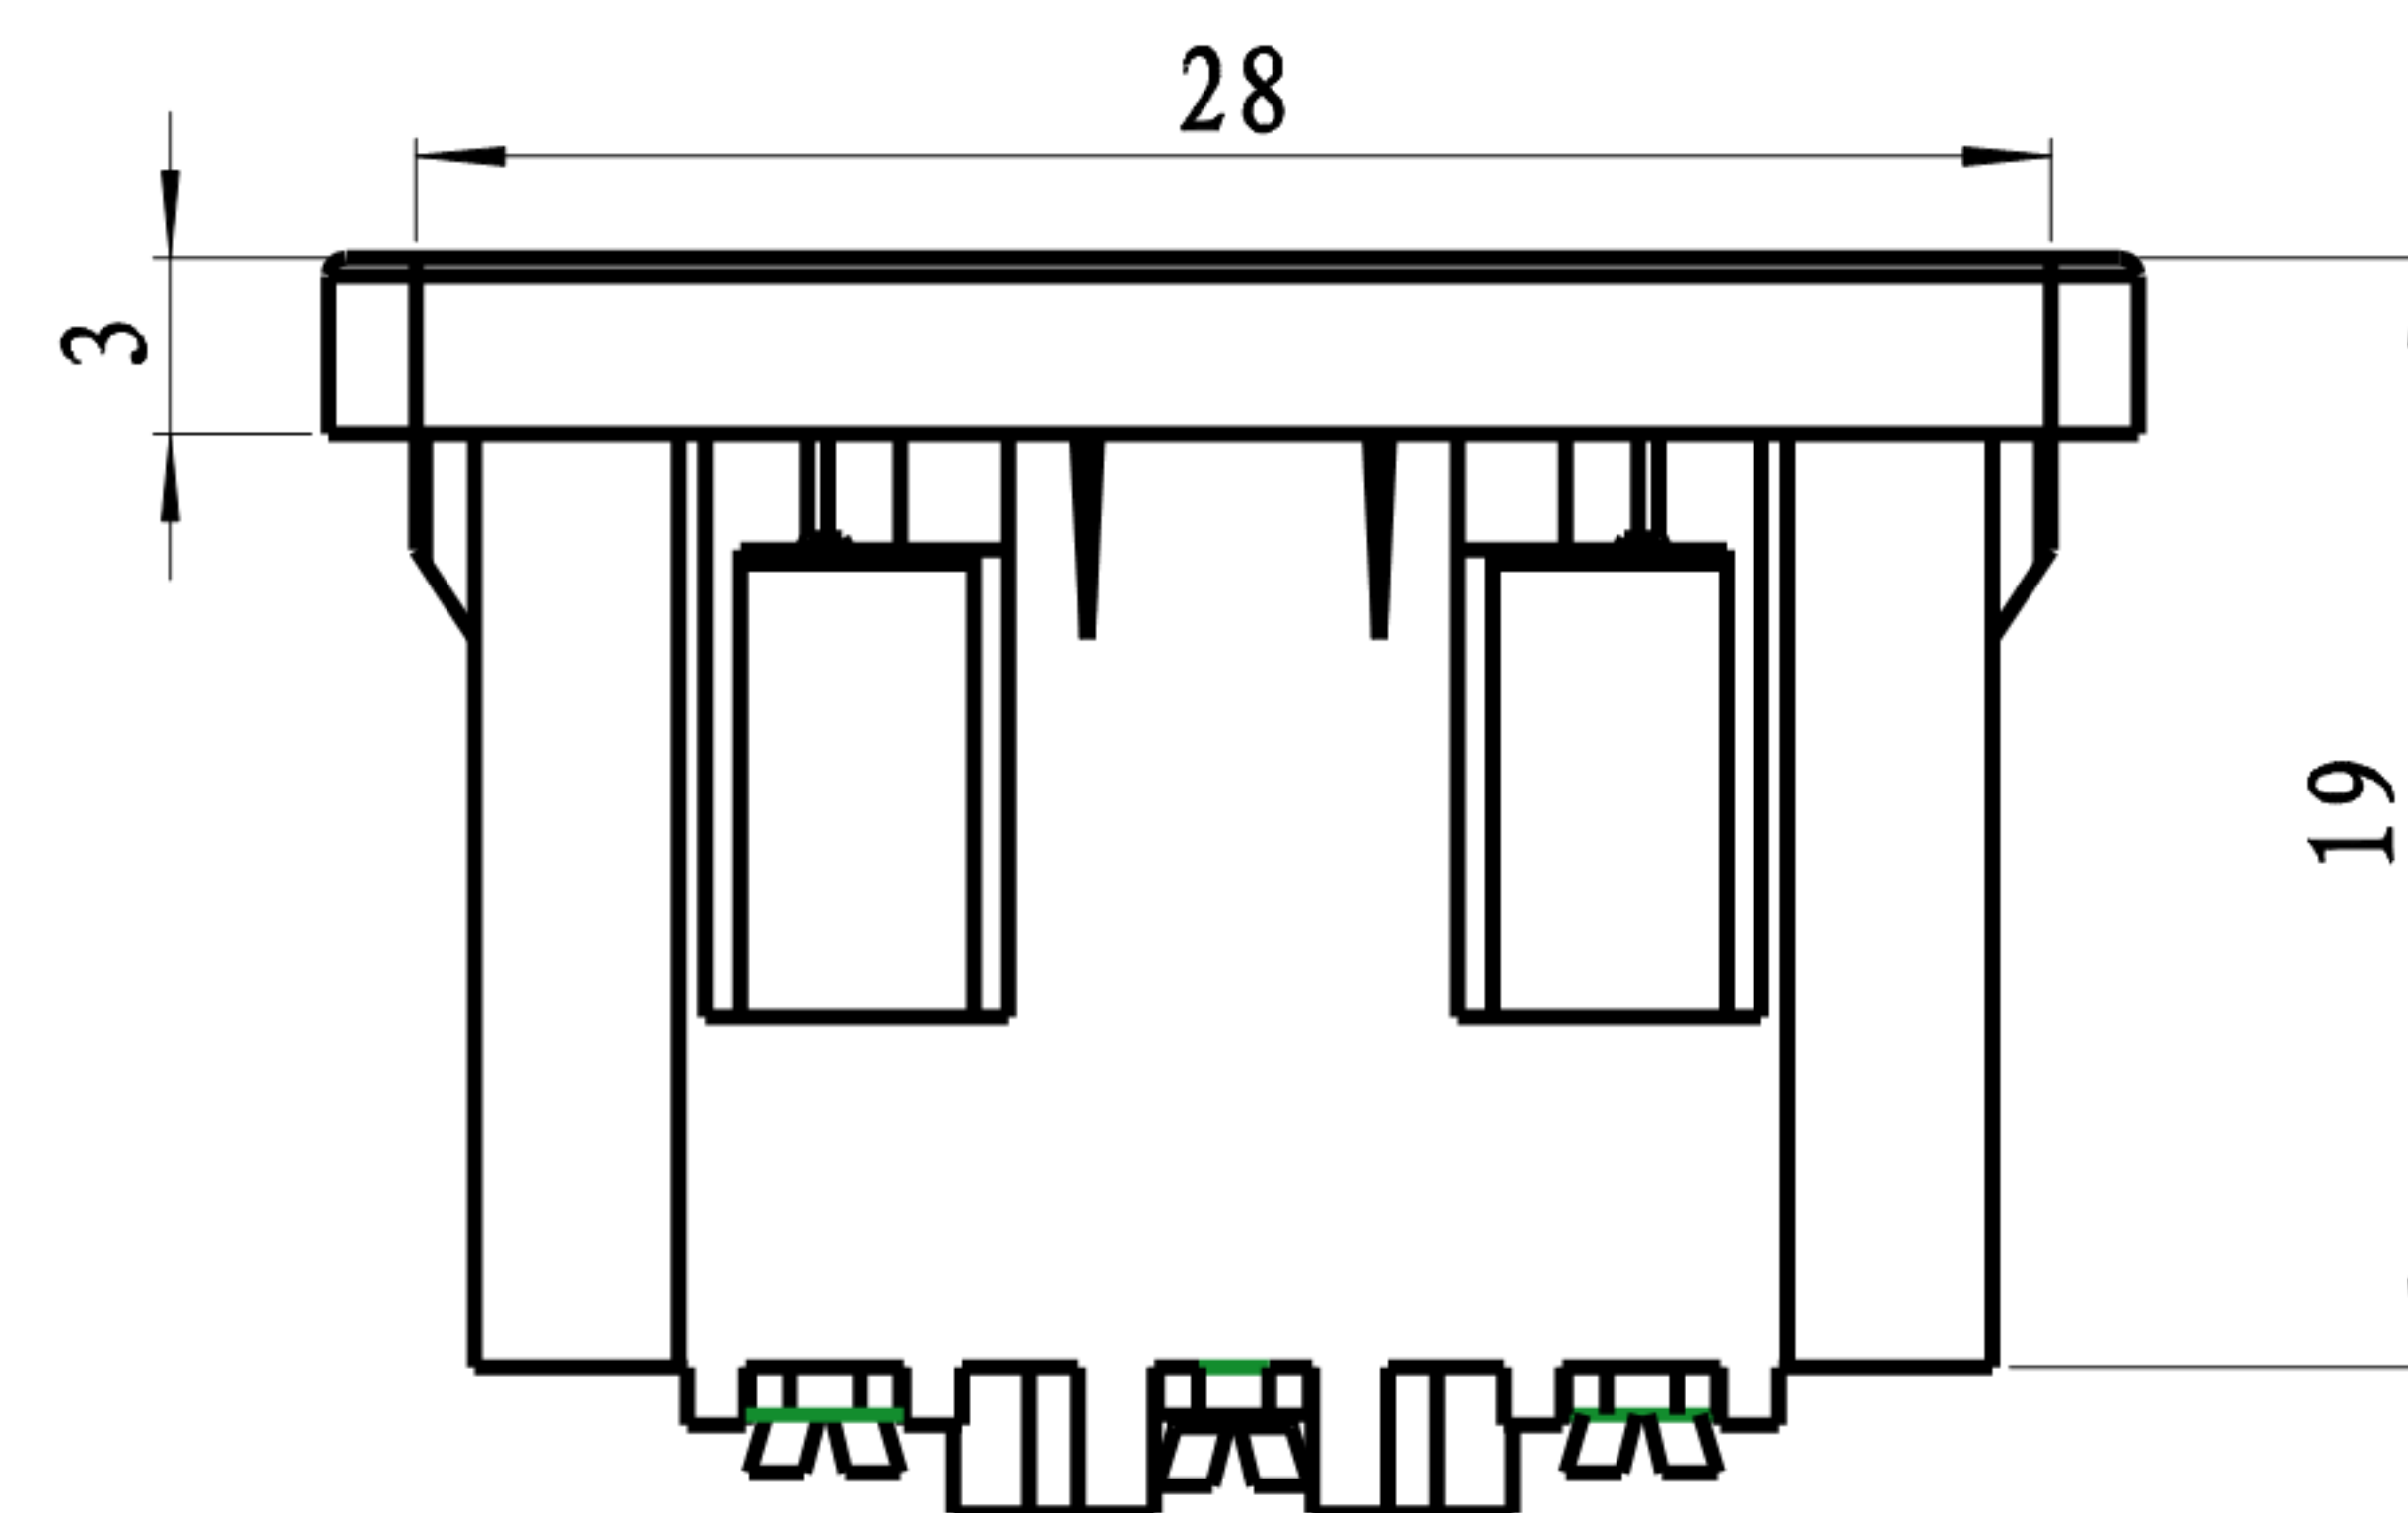
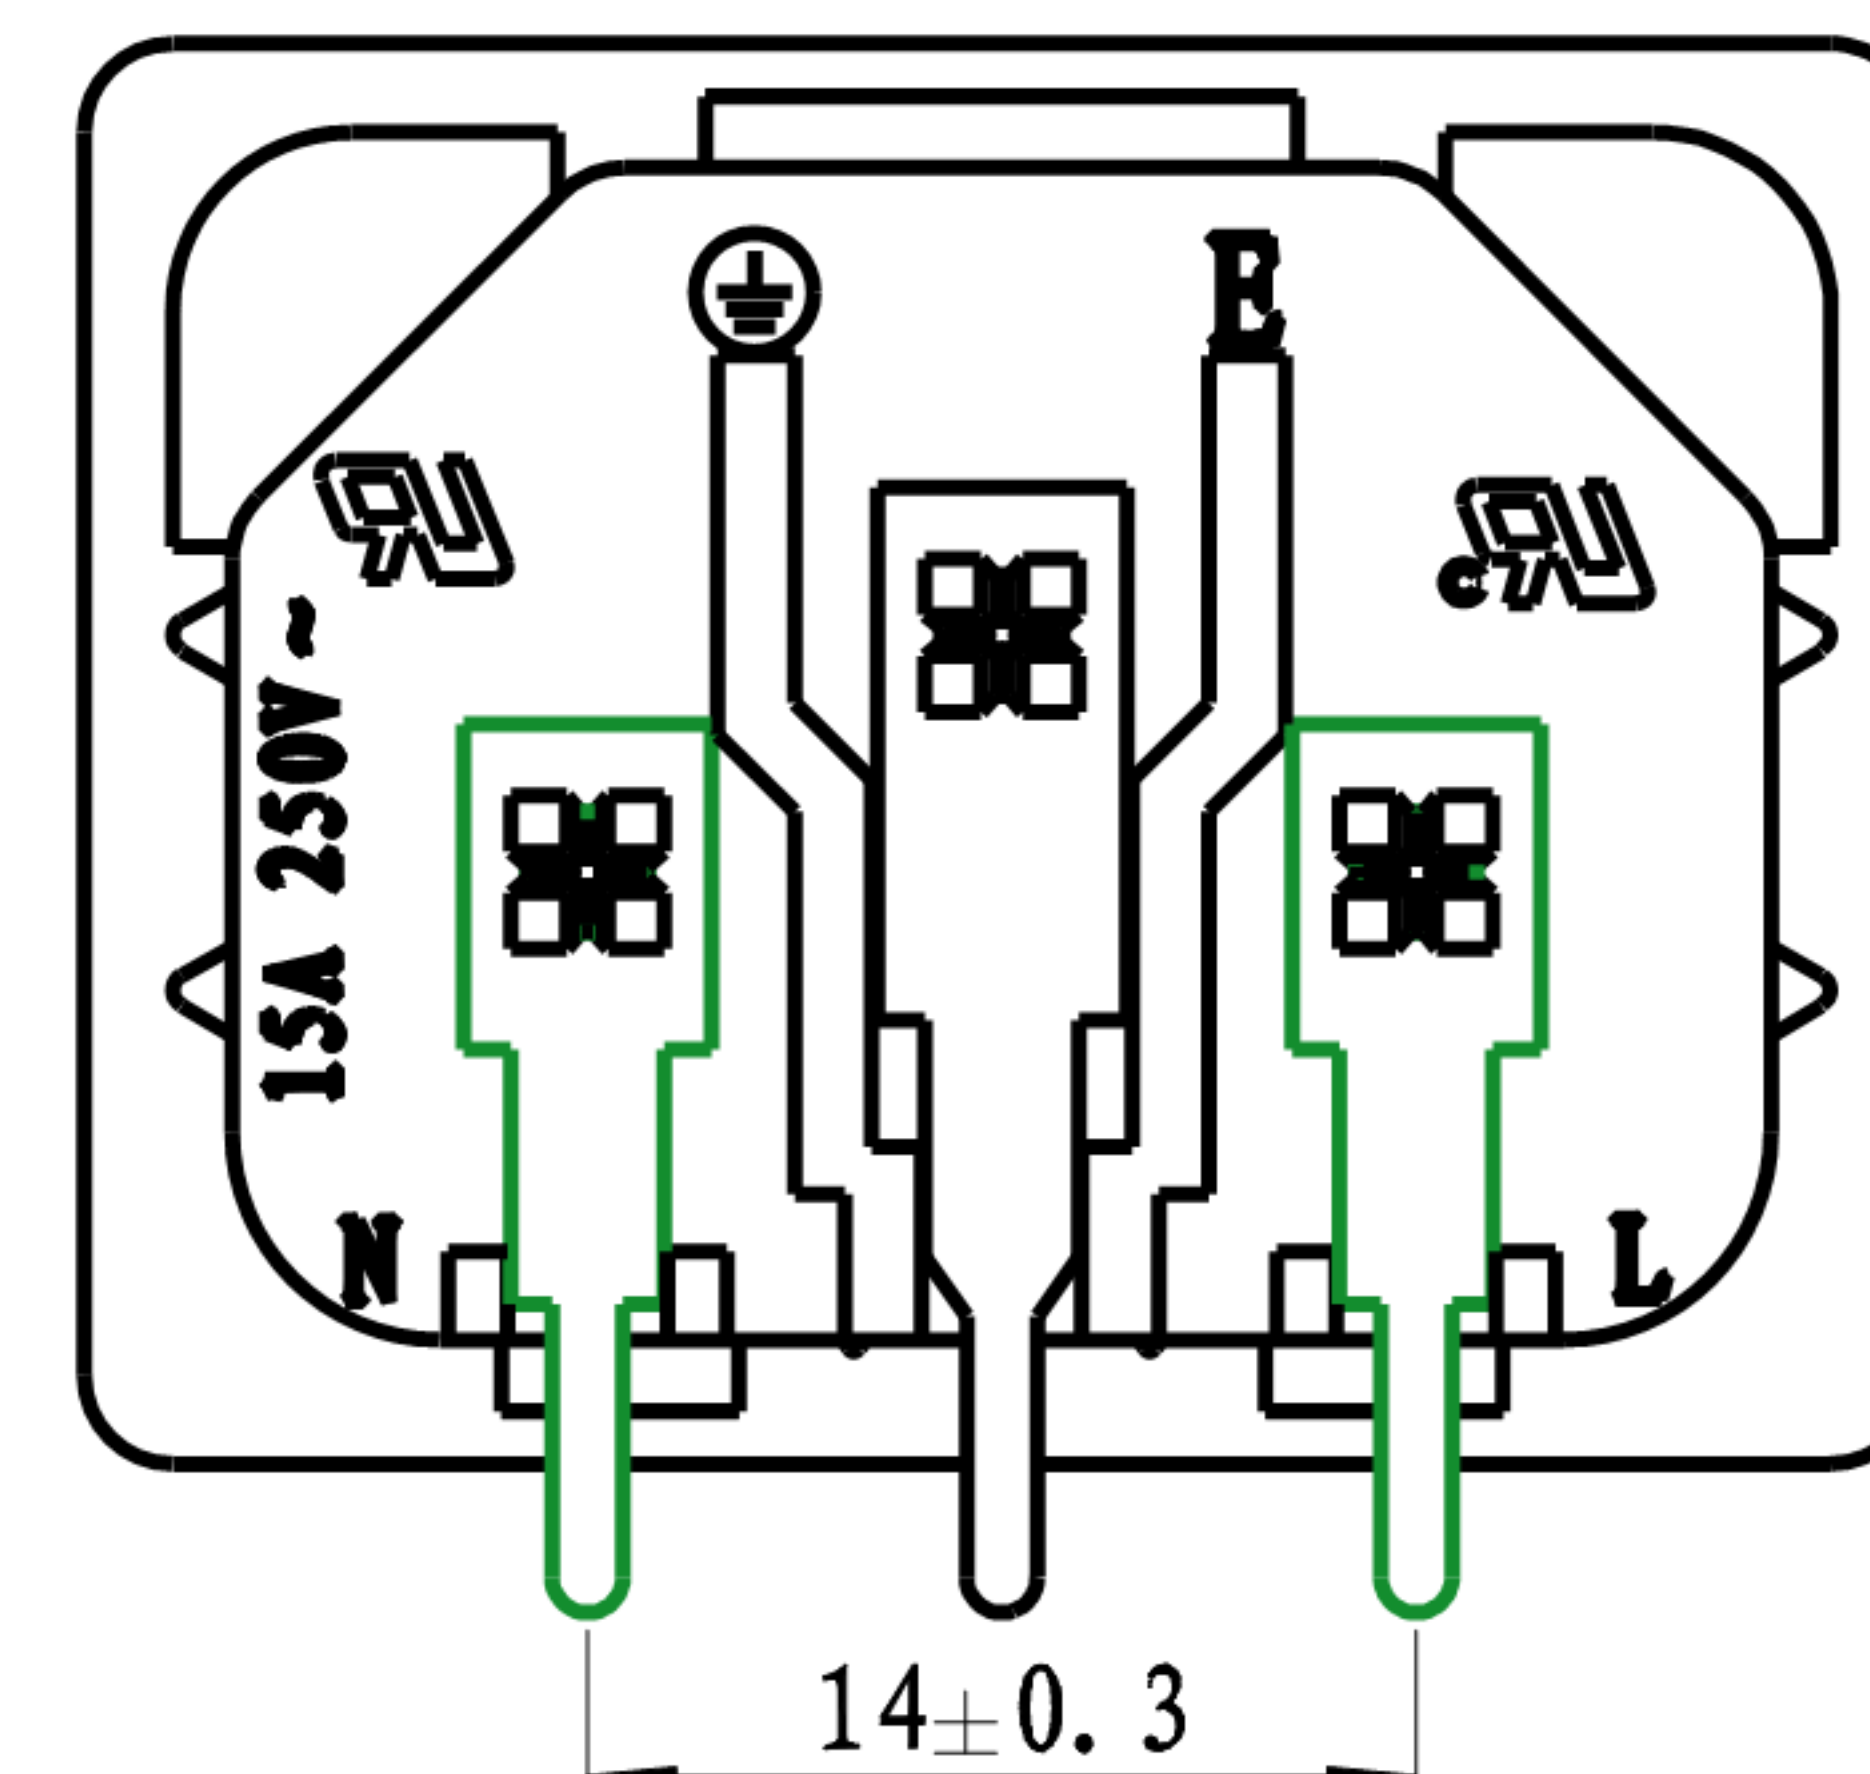
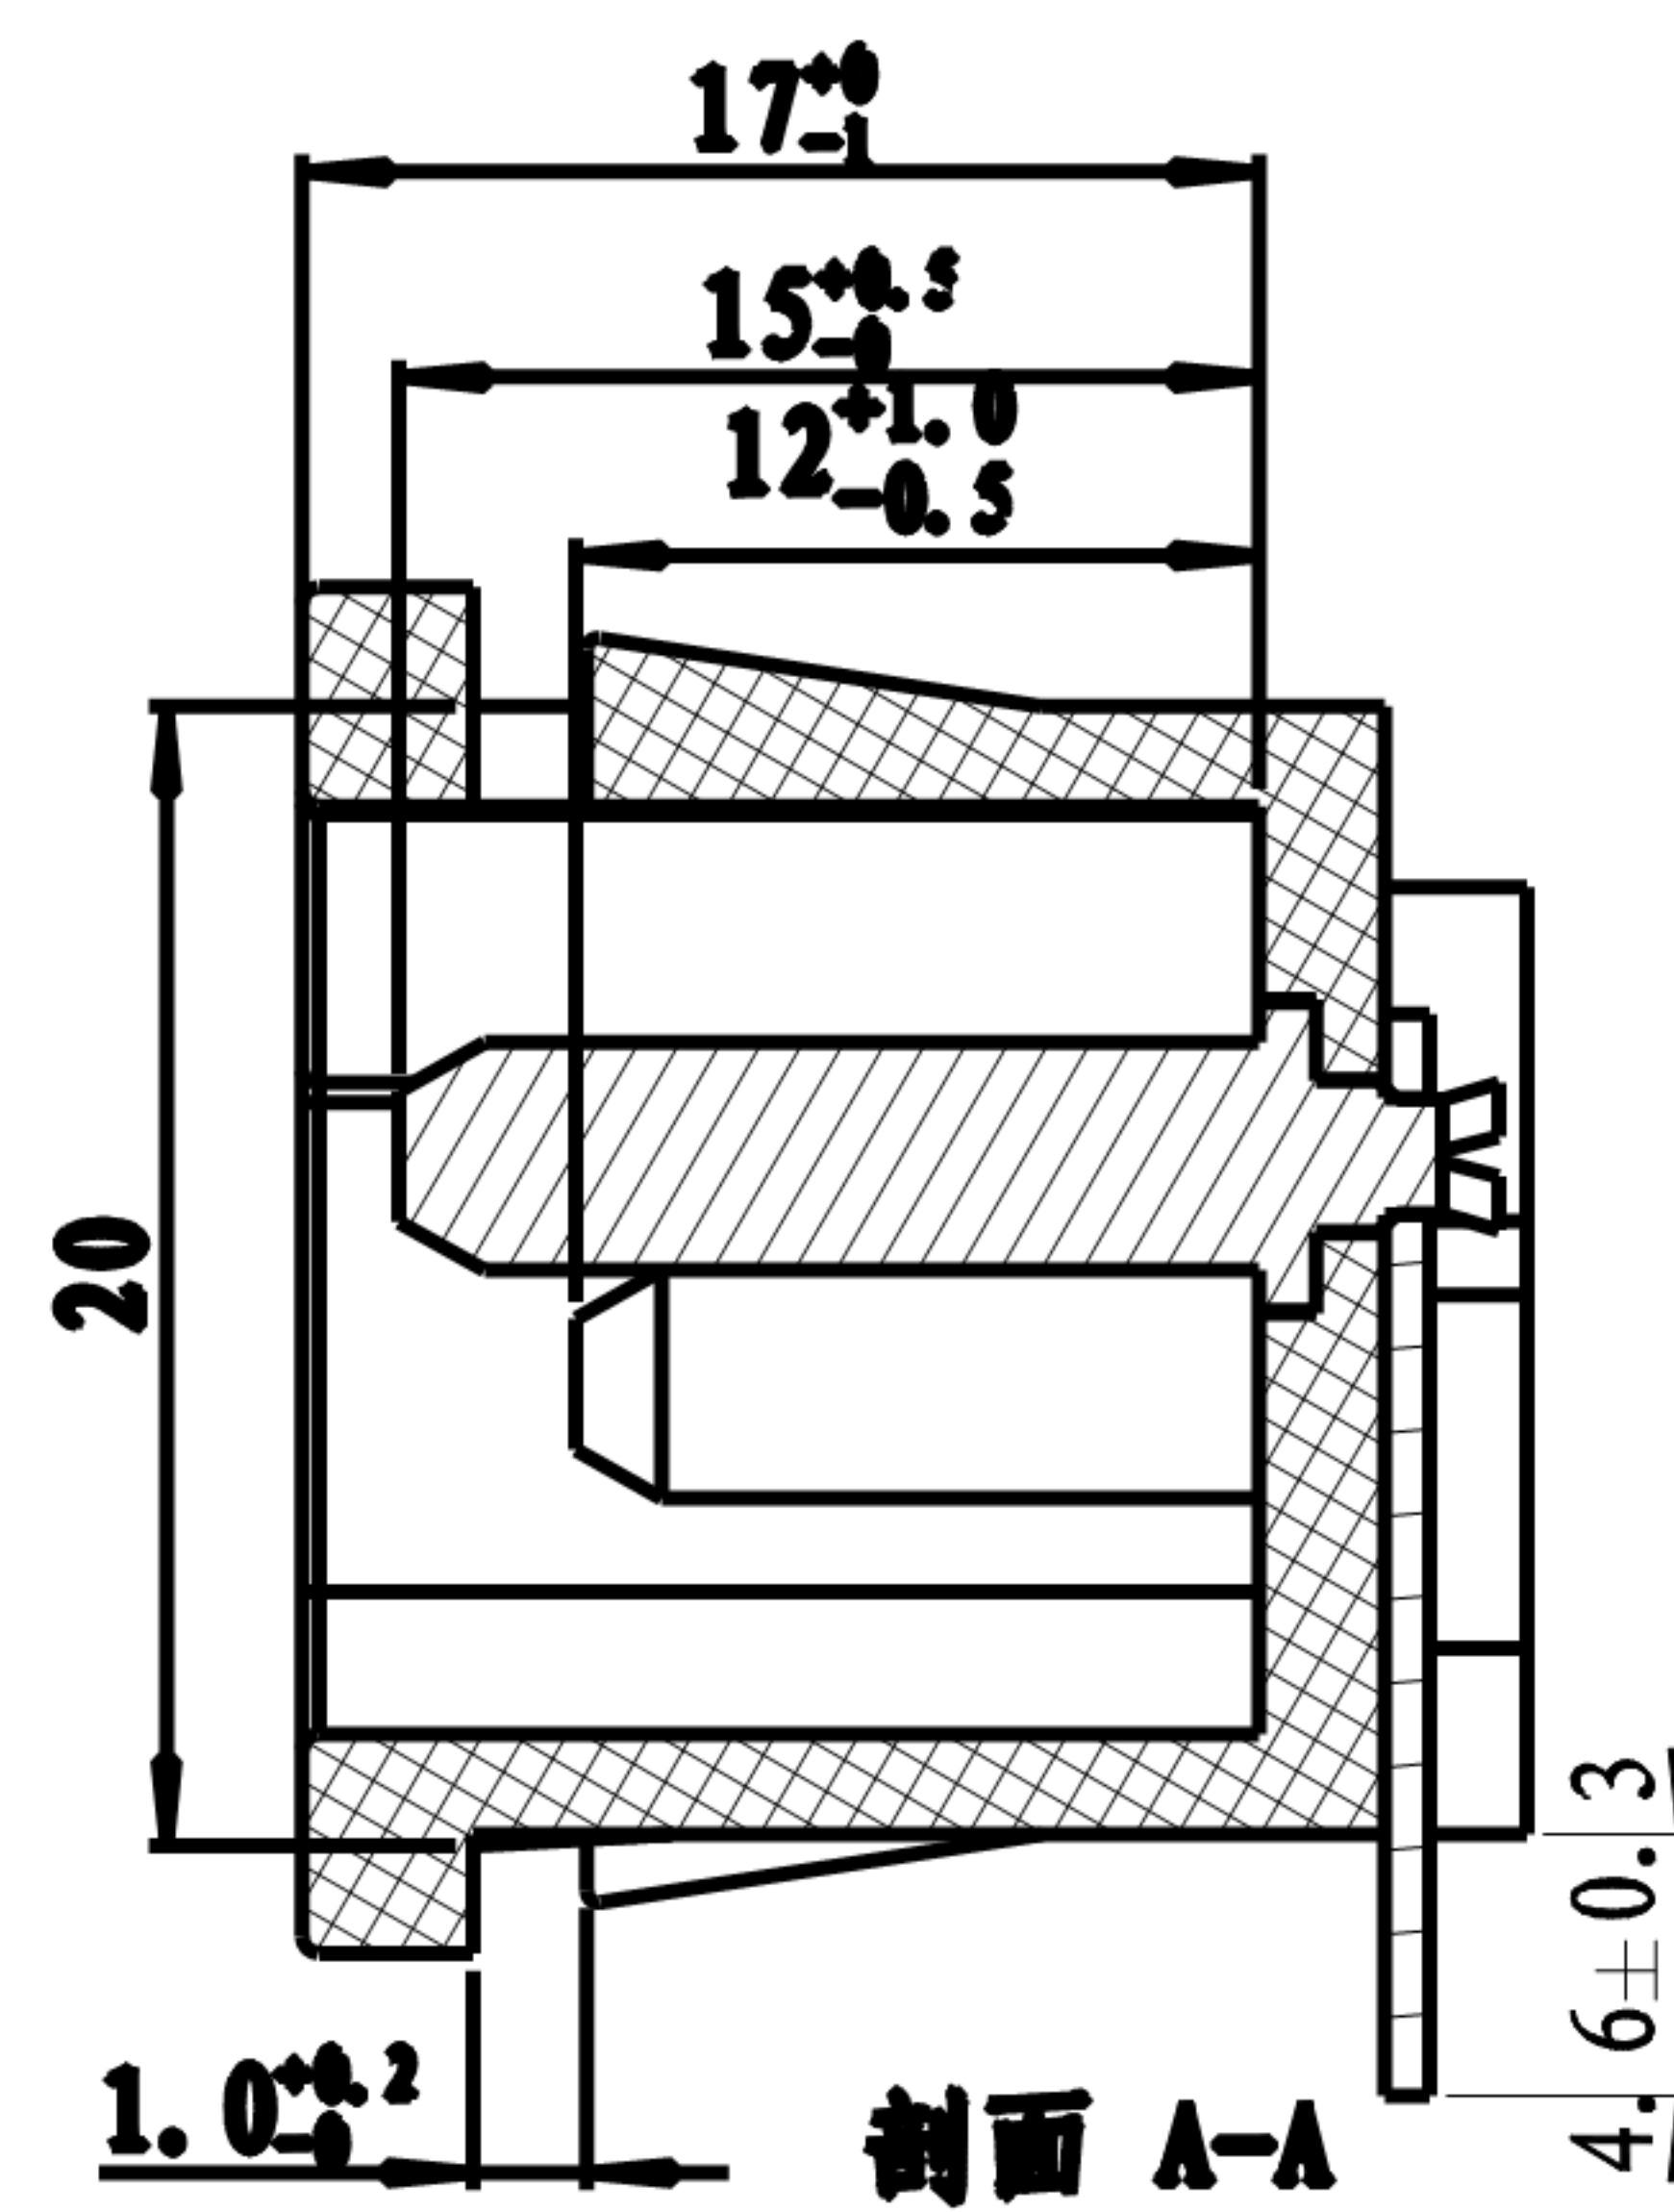


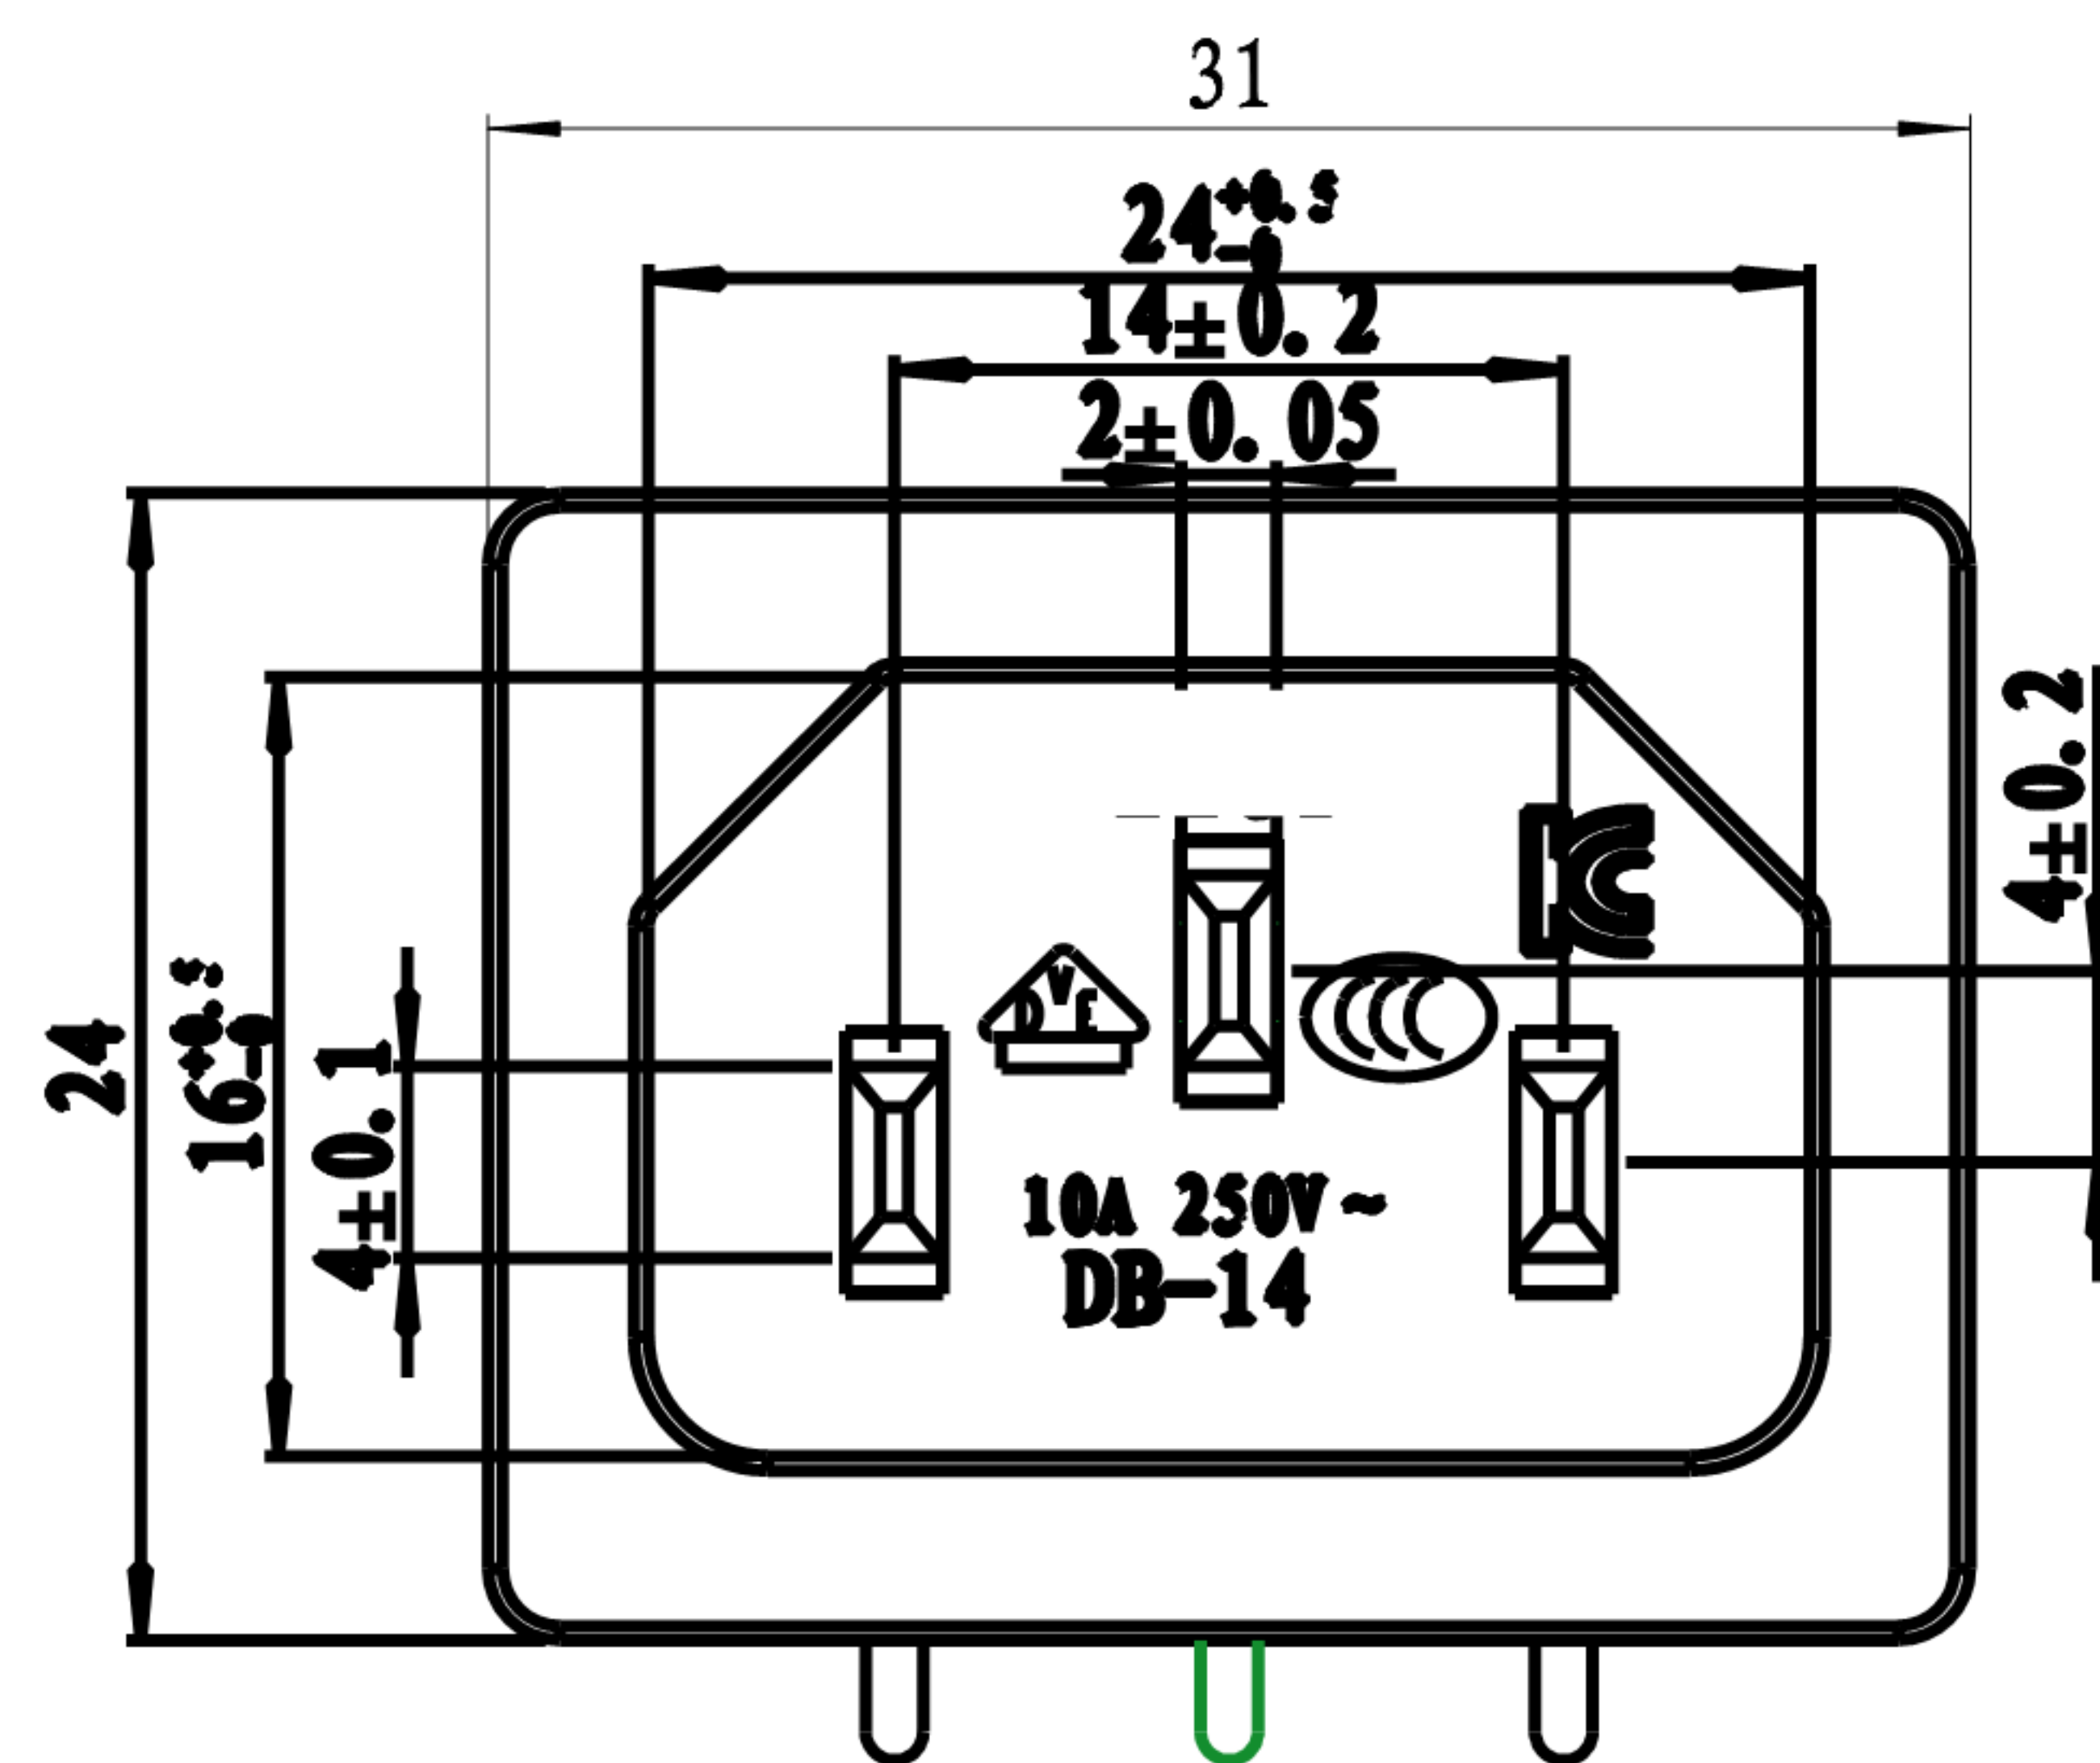

Rating :
 15A 250V AC UL cUL
 10A 250V AC VDE 3C KC
 Insert And Extract Force: 1.36kgf ~ 6.8kgf
 Terminal Strength: ≥80N
 Operating Life: ≥5000 cycles
 Withstand Voltage: Between all terminals: 2500VAC (50-60Hz) 1min
 terminals to Base: 3750V AC (50-60Hz) 1min
 Leakage Current: 1mA
 Insulation Resistance: ≥100MΩ 500V DC
 Body Materil: NYLON66 94V-2 ~ 0

				普通公差:		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.							
				COMMON TOLERANCE :									
				UP TO 5	±0.20	单 位	mm	投 影		品 名	Ac Inlet C14型	比 例	Free
				ABOVE 5 TO 30	±0.30	绘 图		核 对		型 号	DB-14		
				ABOVE 30	±0.50	DRAWN BY		CHECKED BY		料 号	DB-14-5P-55 (1. 0)		
REV.	DATE	REVISION DESCRIPTION	ISSUE	ANGULAR	±5°	日 期		核 准		PART NO.			