

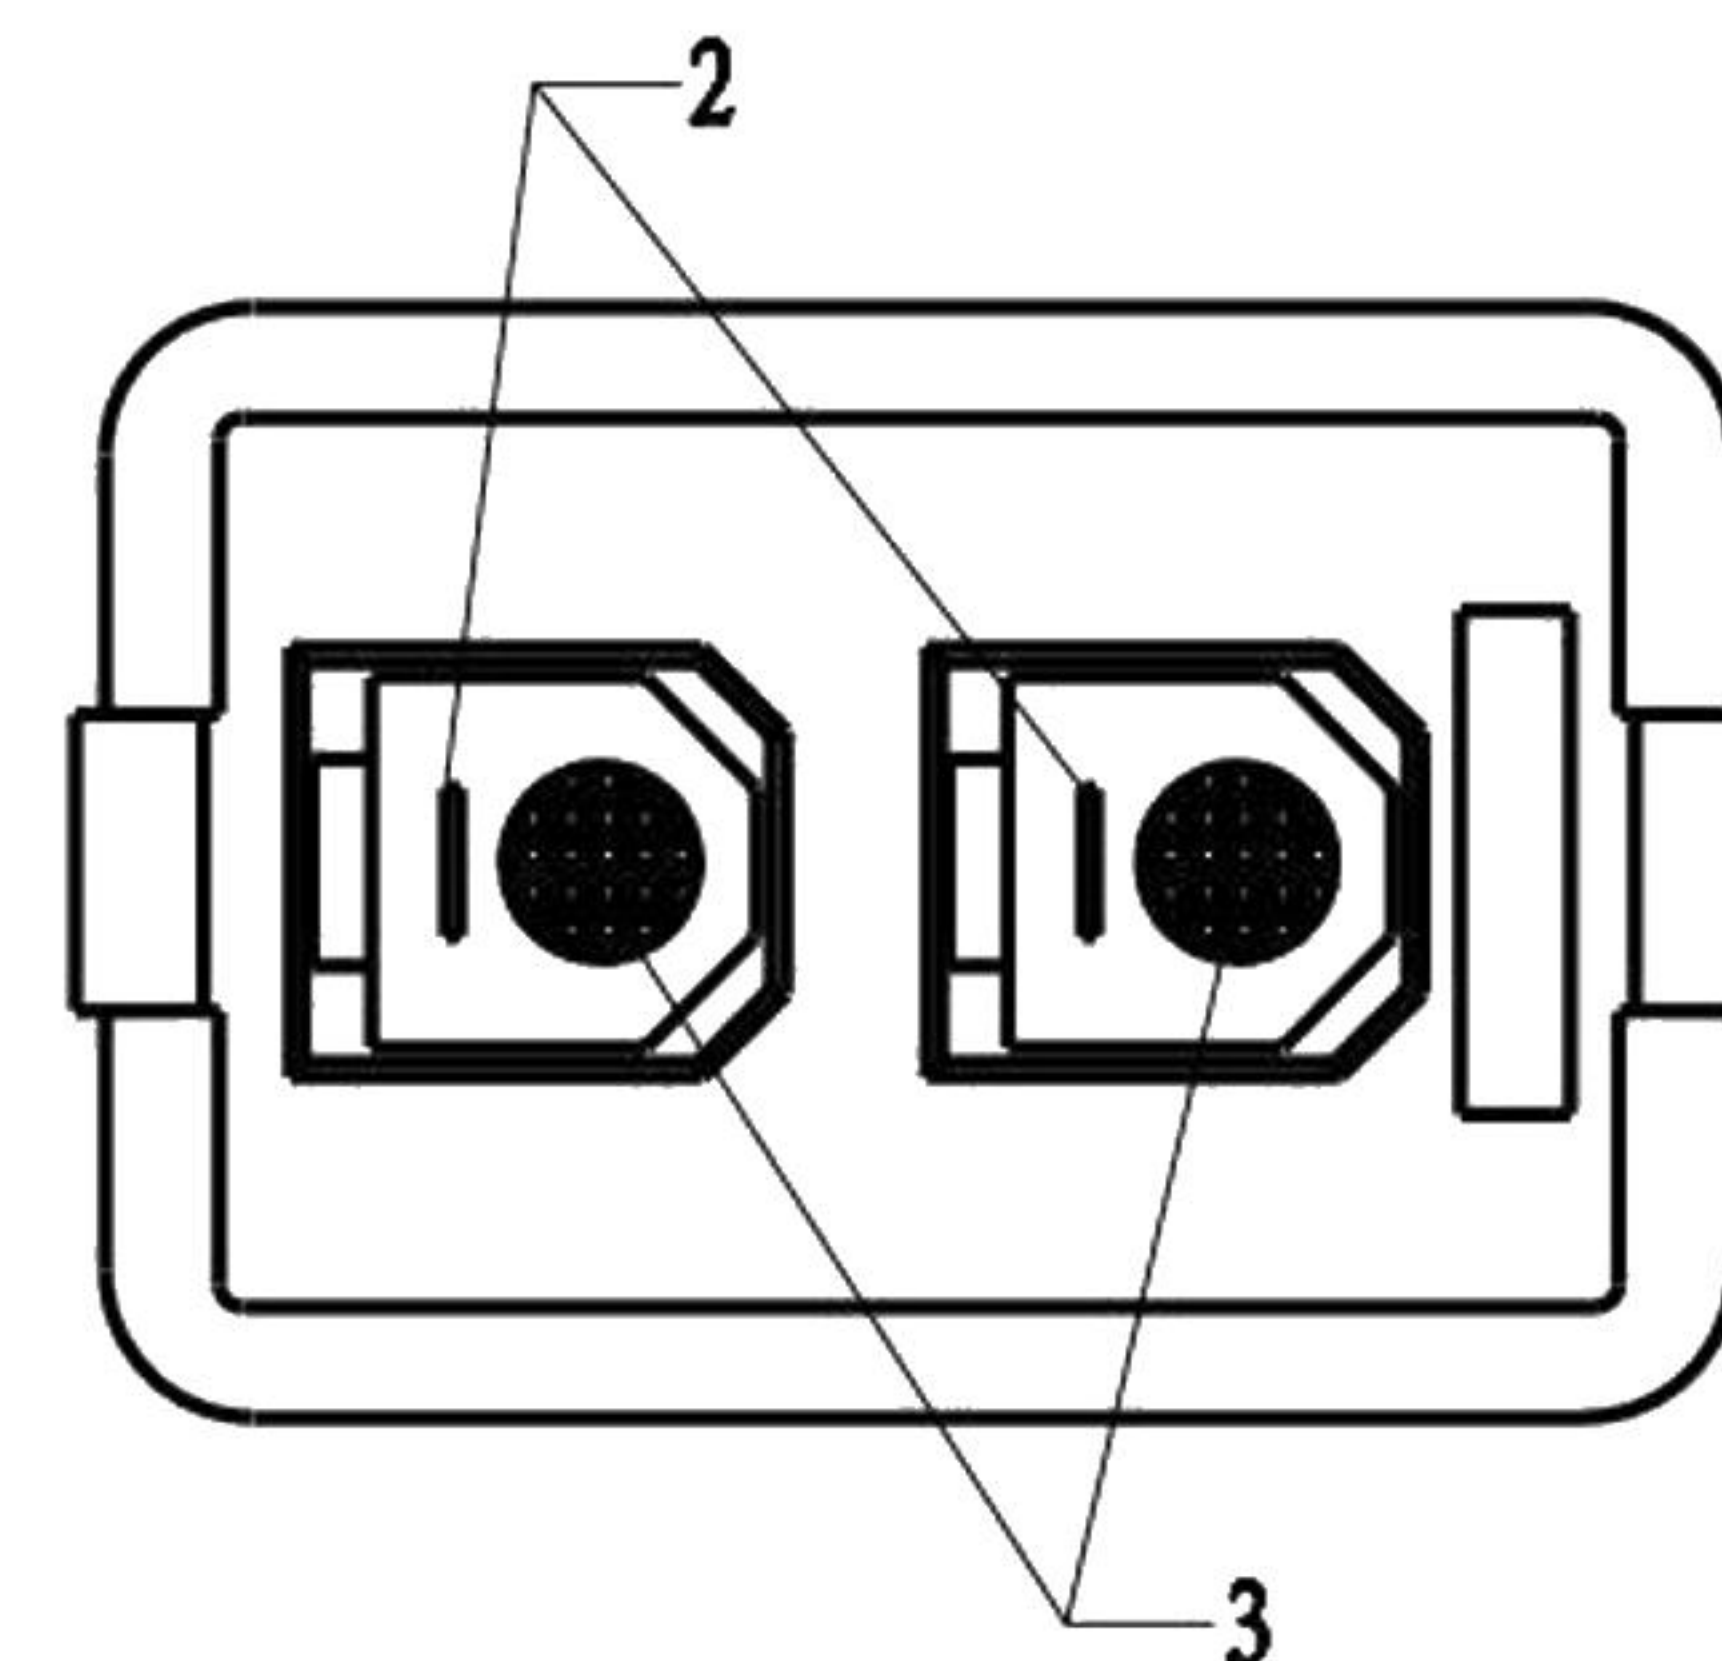


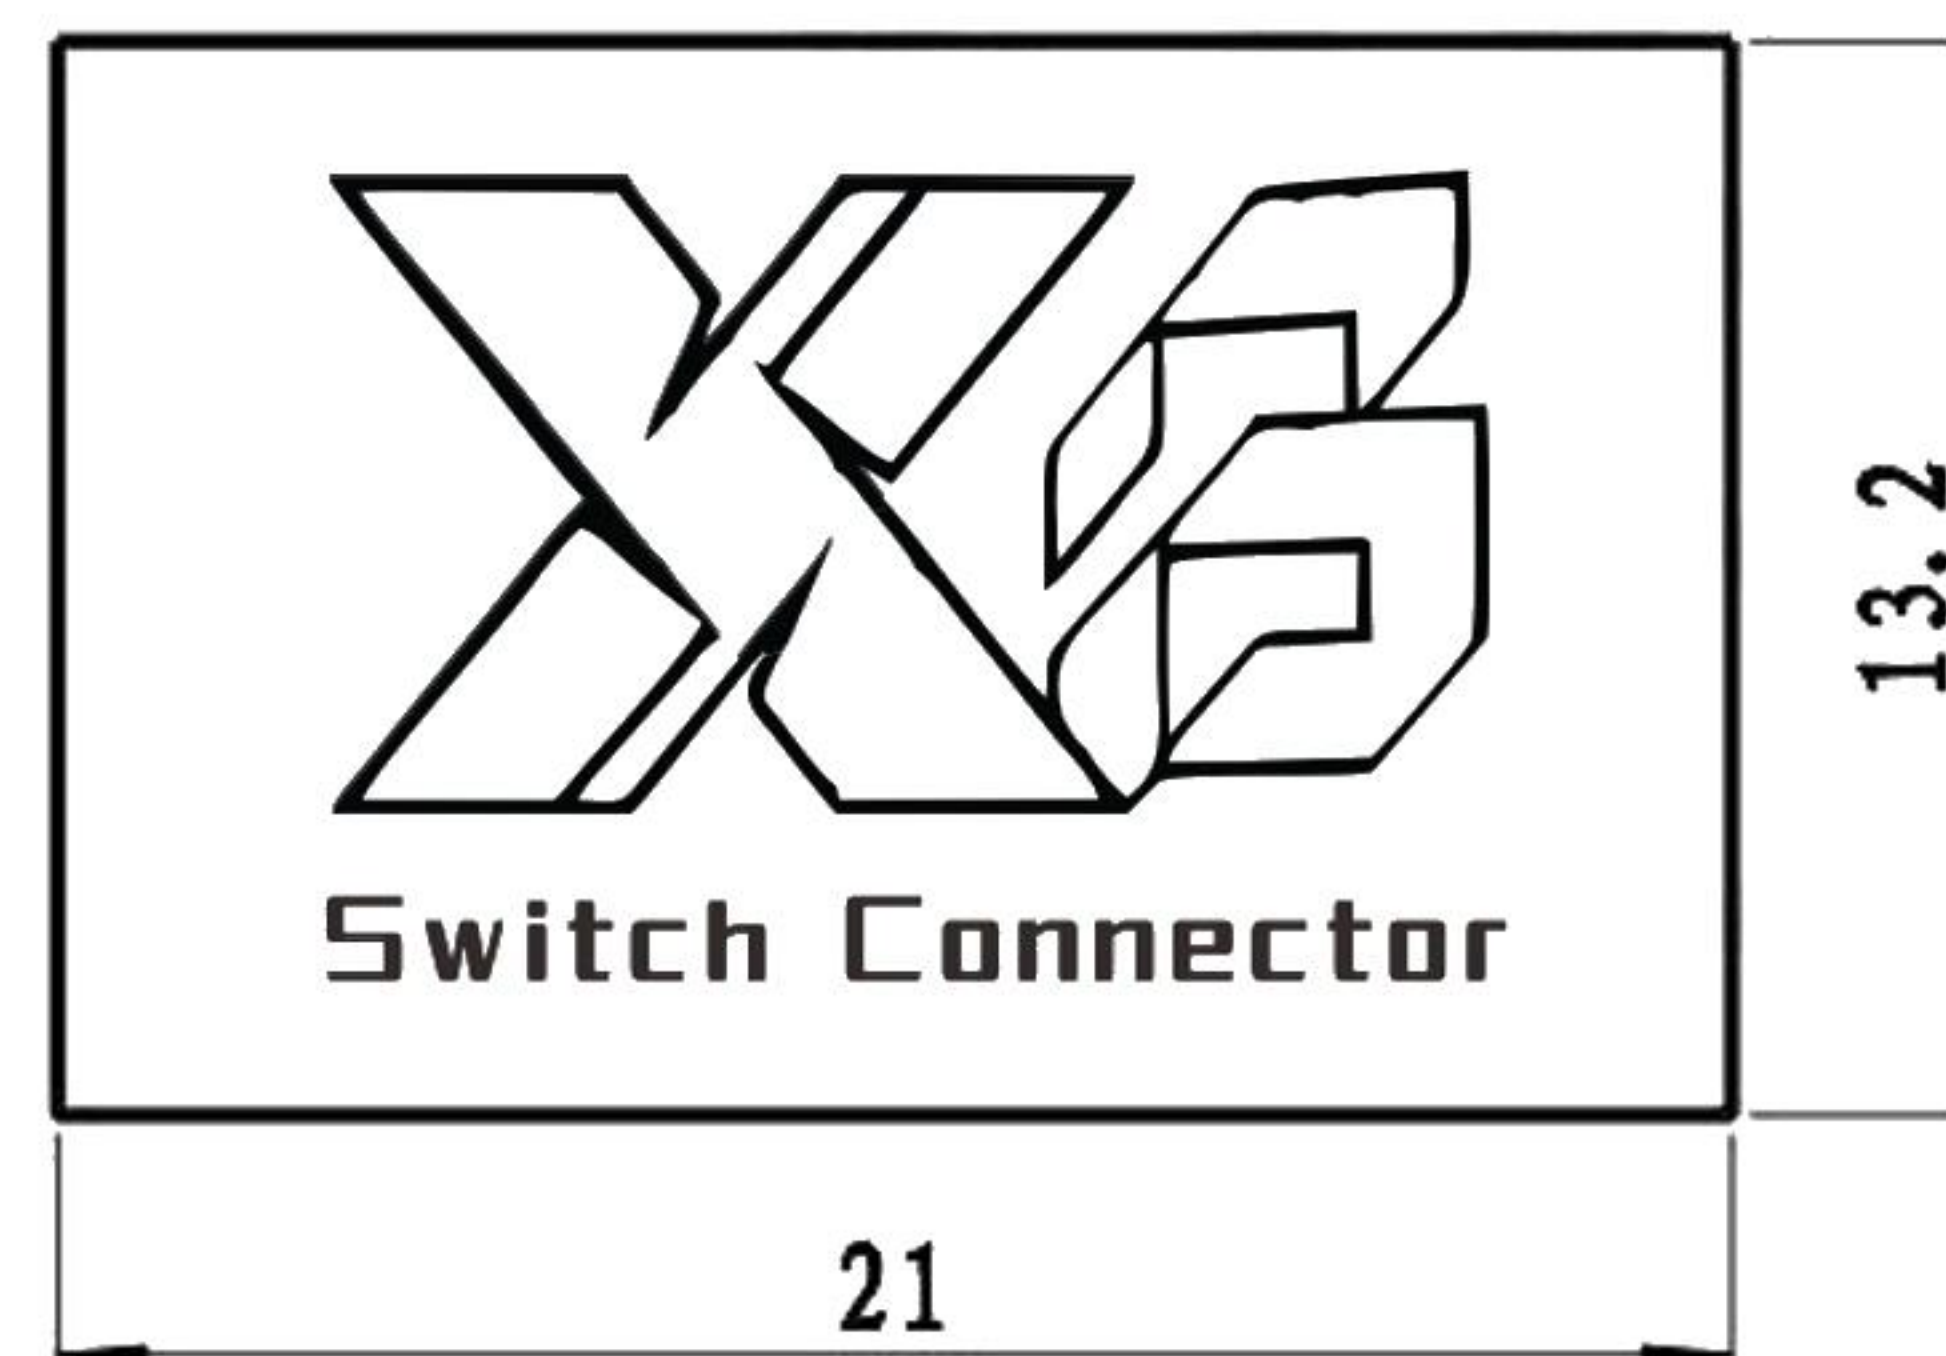

剖面 S-S

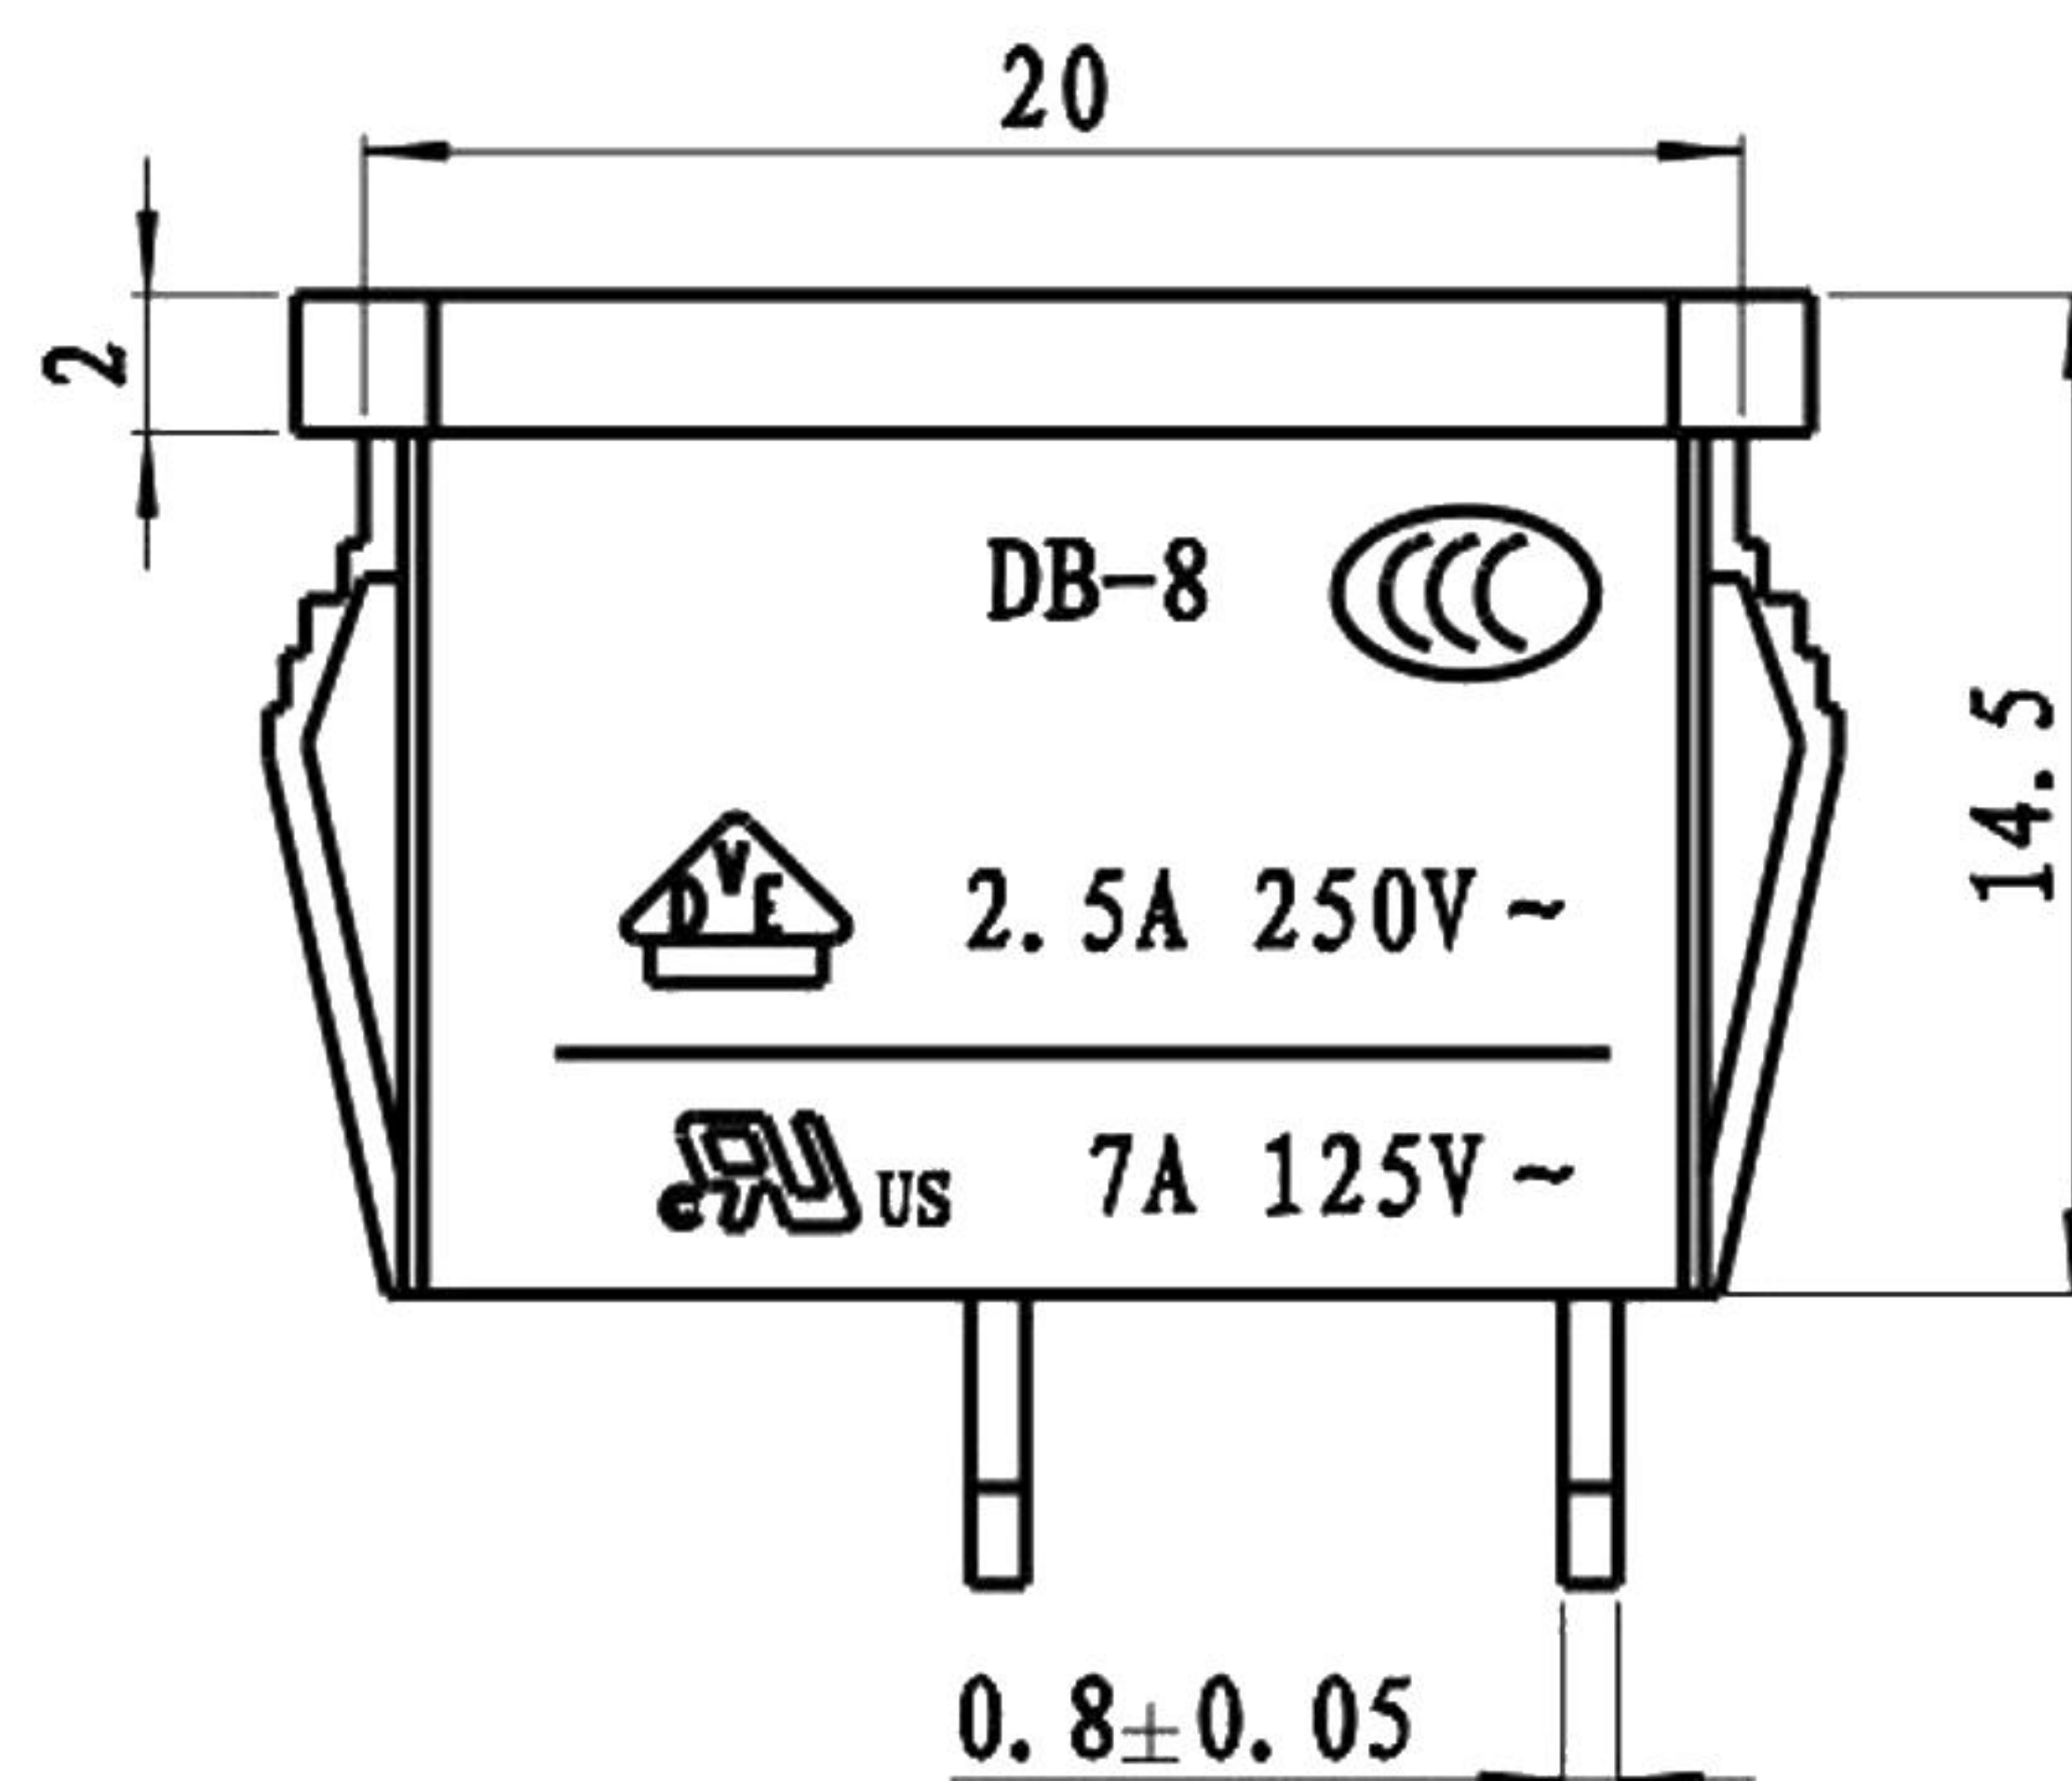

PANEL CUT-OUT

Rating:

7A 125V AC UL cUL

2.5A 250V AC VDE 3C

Insert And Extract Force: 20N~50N

Terminal Strength: $\geq 60\text{N}$

Operating Life: ≥ 6000 cycles

Withstand Voltage: Between all terminals: 2500VAC (50-60Hz) 1min

Terminals to Base: 3750V AC (50-60Hz) 1min

Leakage Current: 1mA

Insulation Resistance: $\geq 100\text{M}\Omega$ 500V DC

Body Material: NYLON 66 94V-2 ~ 0

序号	名称	材料	处理	数量	备注
1	DB-8-19A塑料件	环阻PA66	黑色	1	
2	DB-8-S1端子	黄铜	镀锡	2	Plating Thickness >80u''
3	DB-8-1DX圆针	黄铜	镀镍	2	Plating Thickness 40u'' -80u''

42*28*27cm箱, 200只*15袋装=3k件, 净重:12.6毛重:14.6=KG,

				普通公差:		X3 Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.							
				COMMON TOLERANCE :									
				UP TO 5	±0.20	单位 UNIT	mm	投影 PROJECTED		品名 PRODUCT NAME	Ac Inlet C8型	比例 SCALE	Free
				ABOVE 5 TO 30	±0.30	绘图 DRAWN BY	金泽杰	核对 CHECKED BY	张华龙	型号 MODEL NO.	/DB-8		
				ABOVE 30	±0.50	日期 DATE	2022/3/29	核准 APPROVAL BY	周培南	料号 PART NO.	DB-8-19AS1-ZP		
REV.	DATE	REVISION DESCRIPTION	ISSUE	ANGULAR	±5°								