
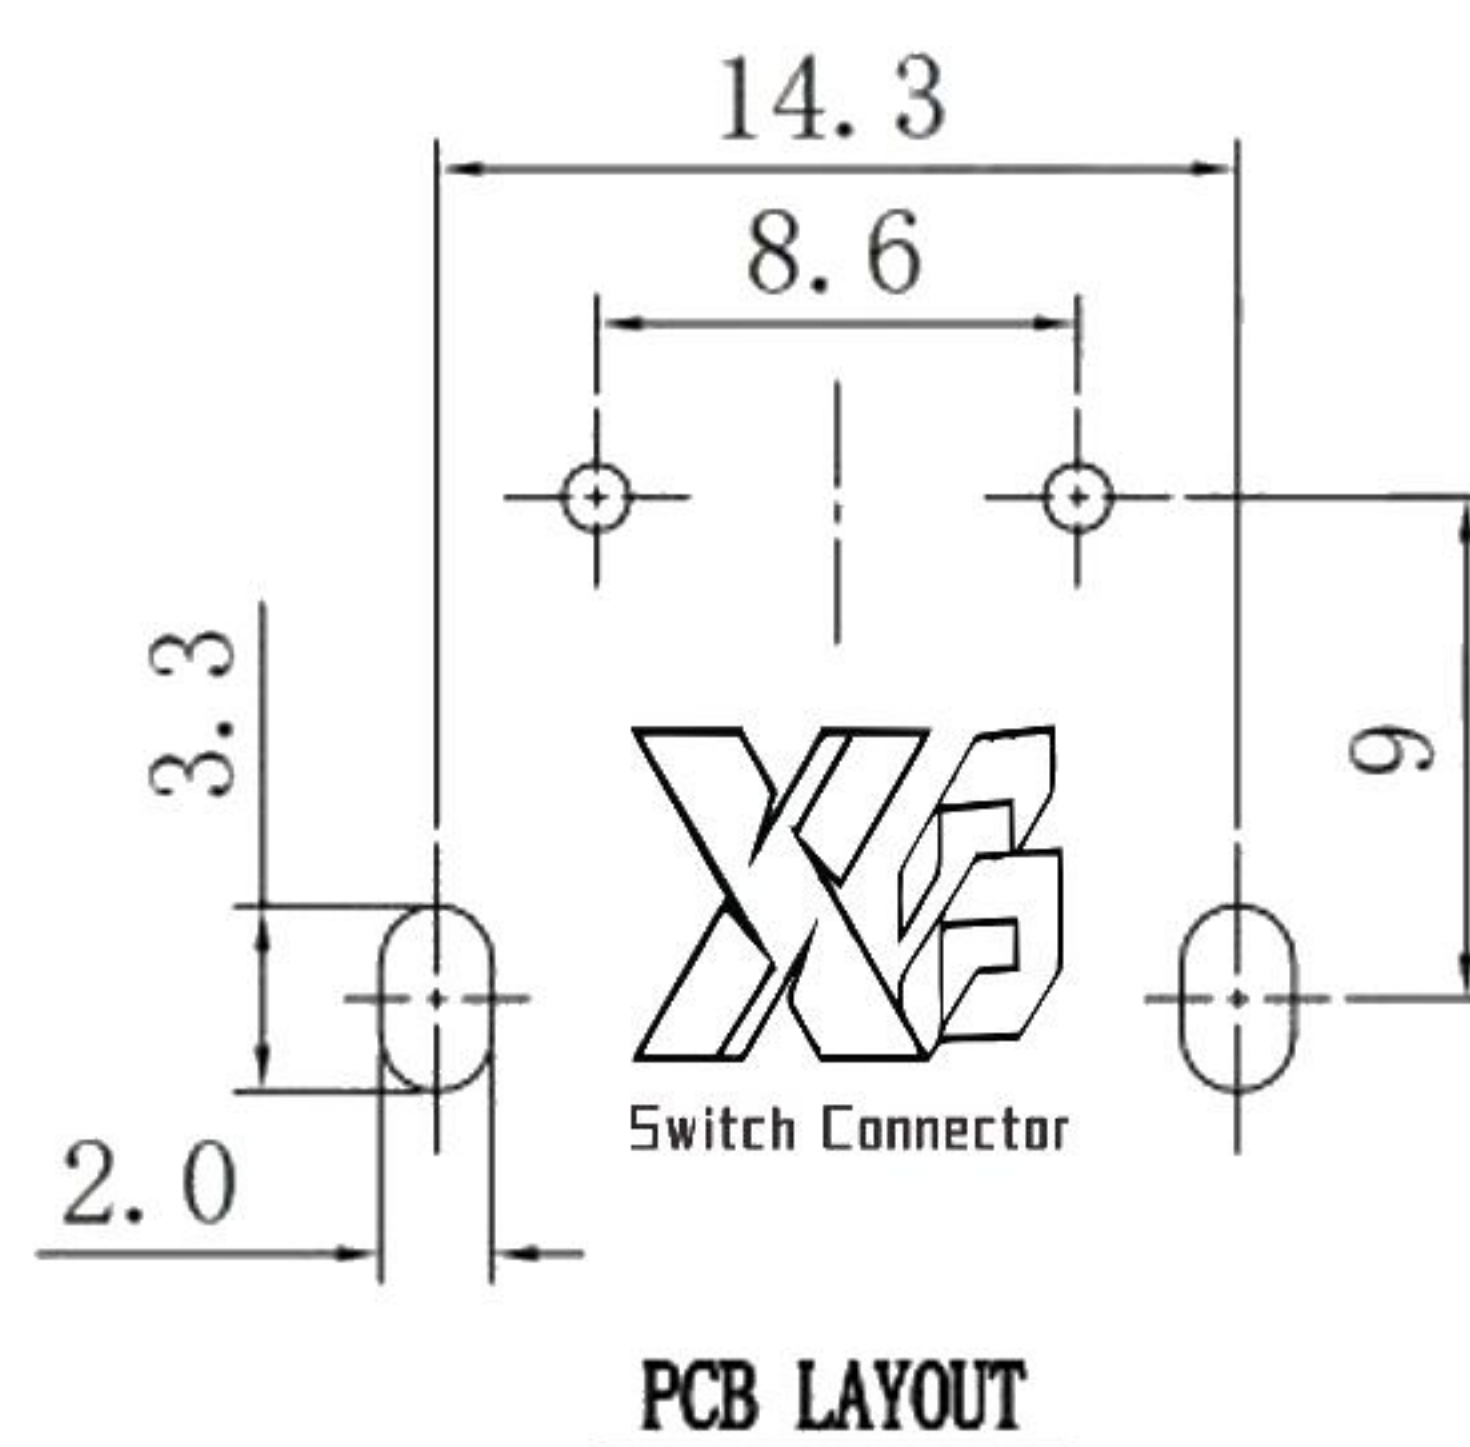
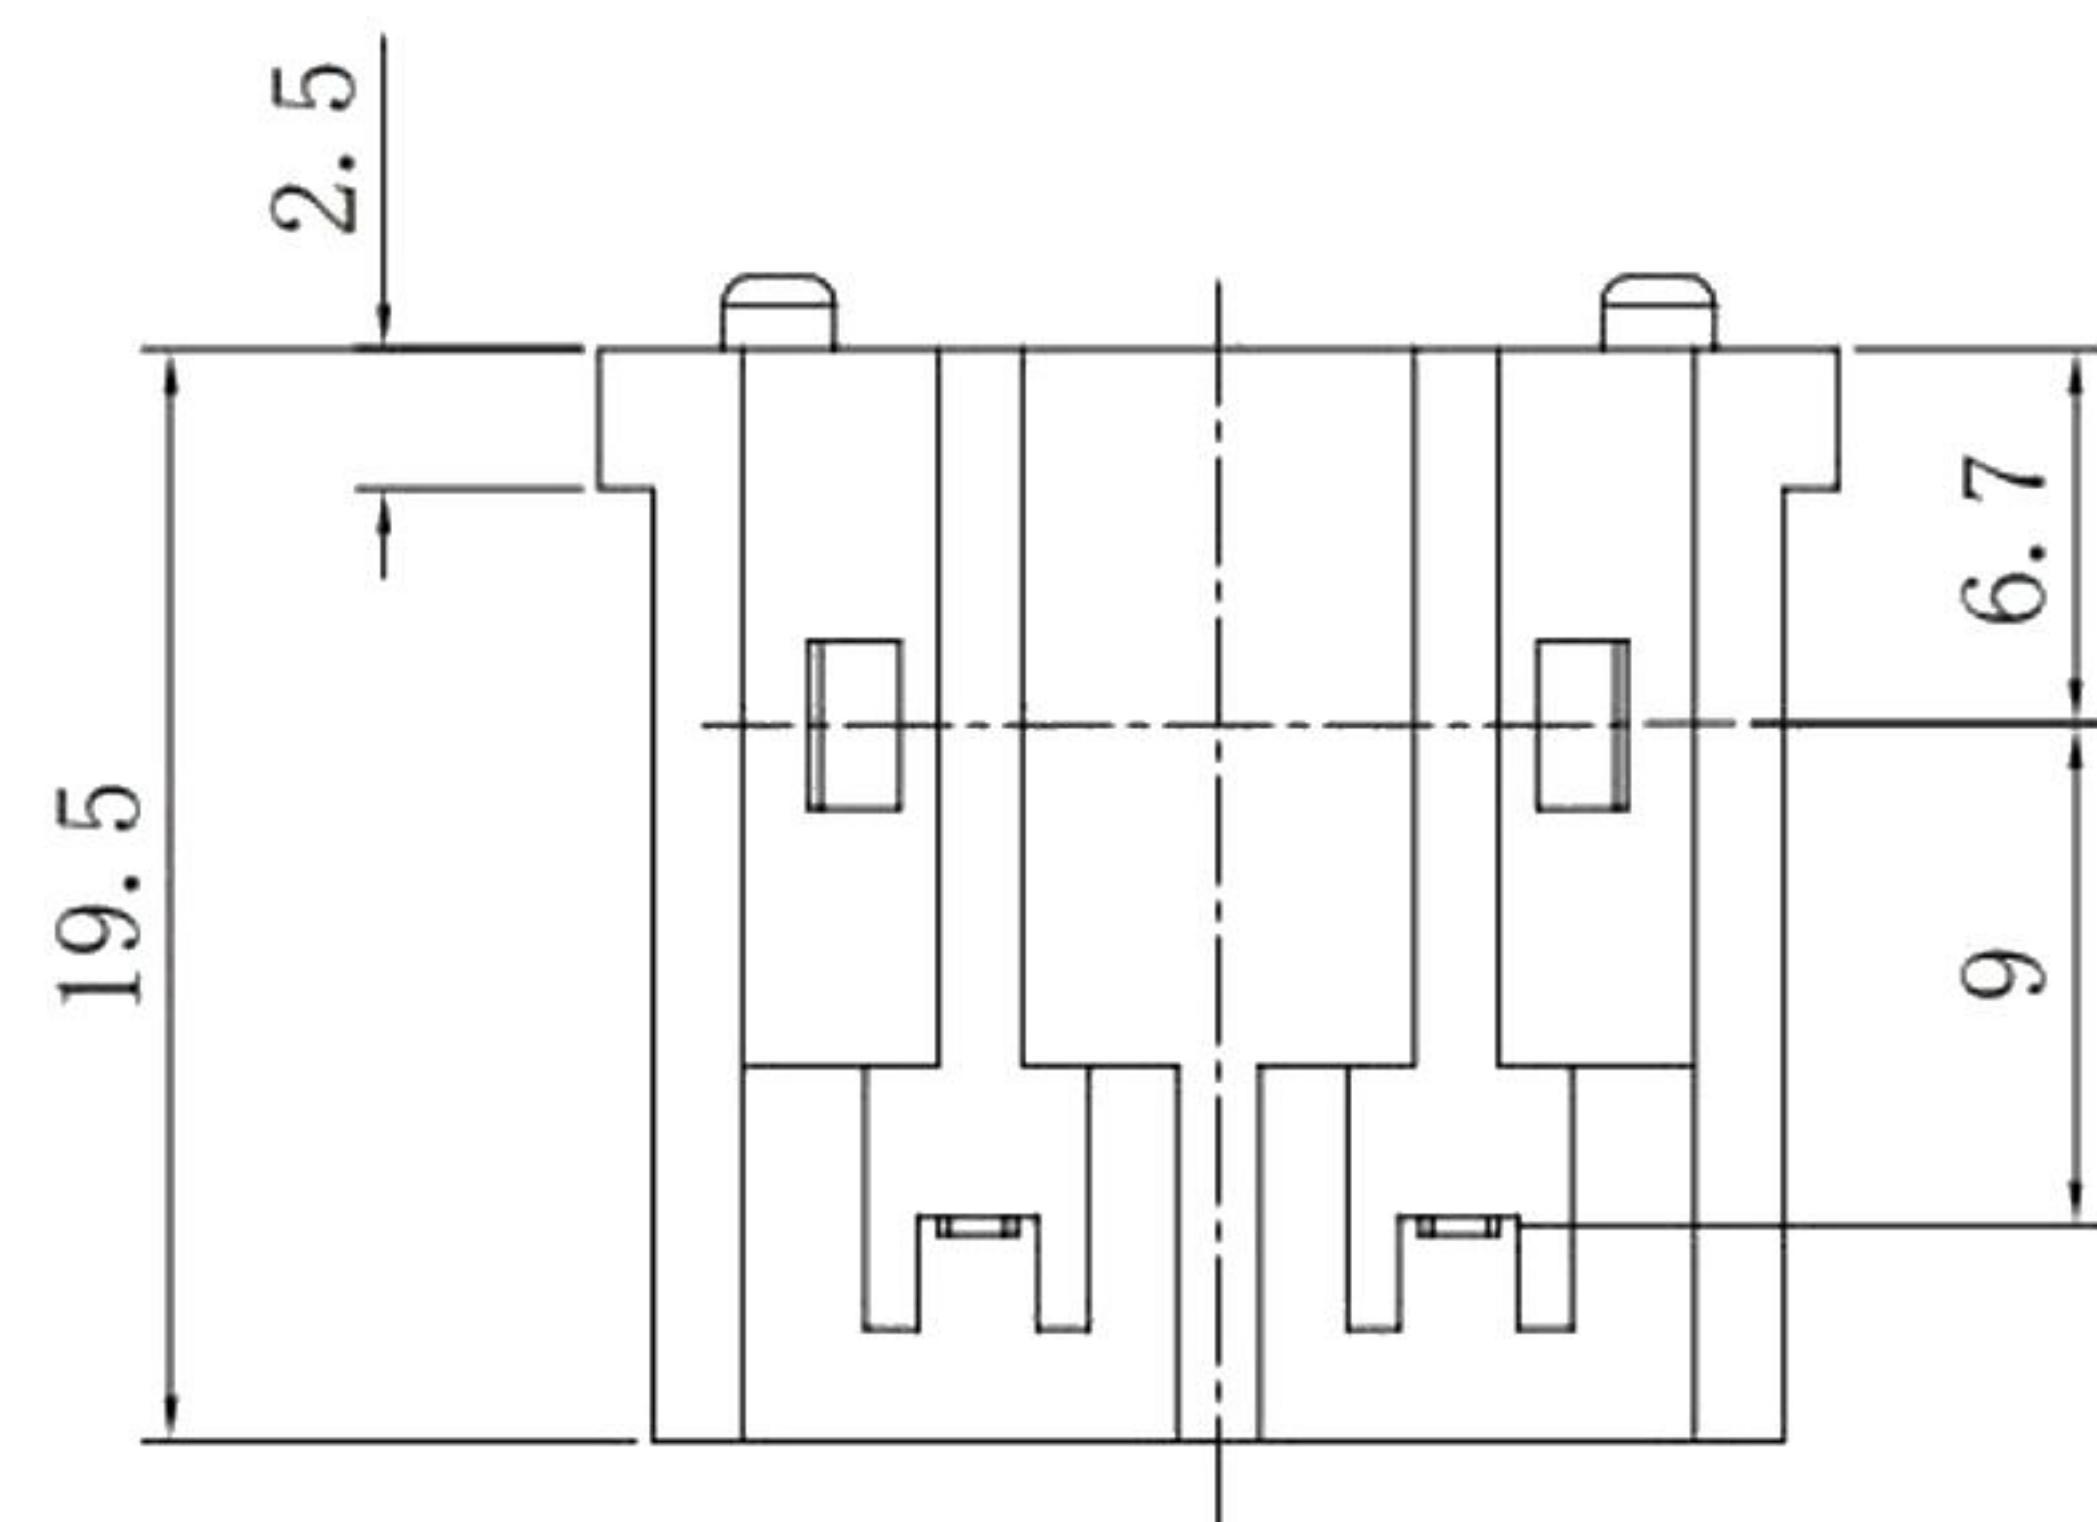
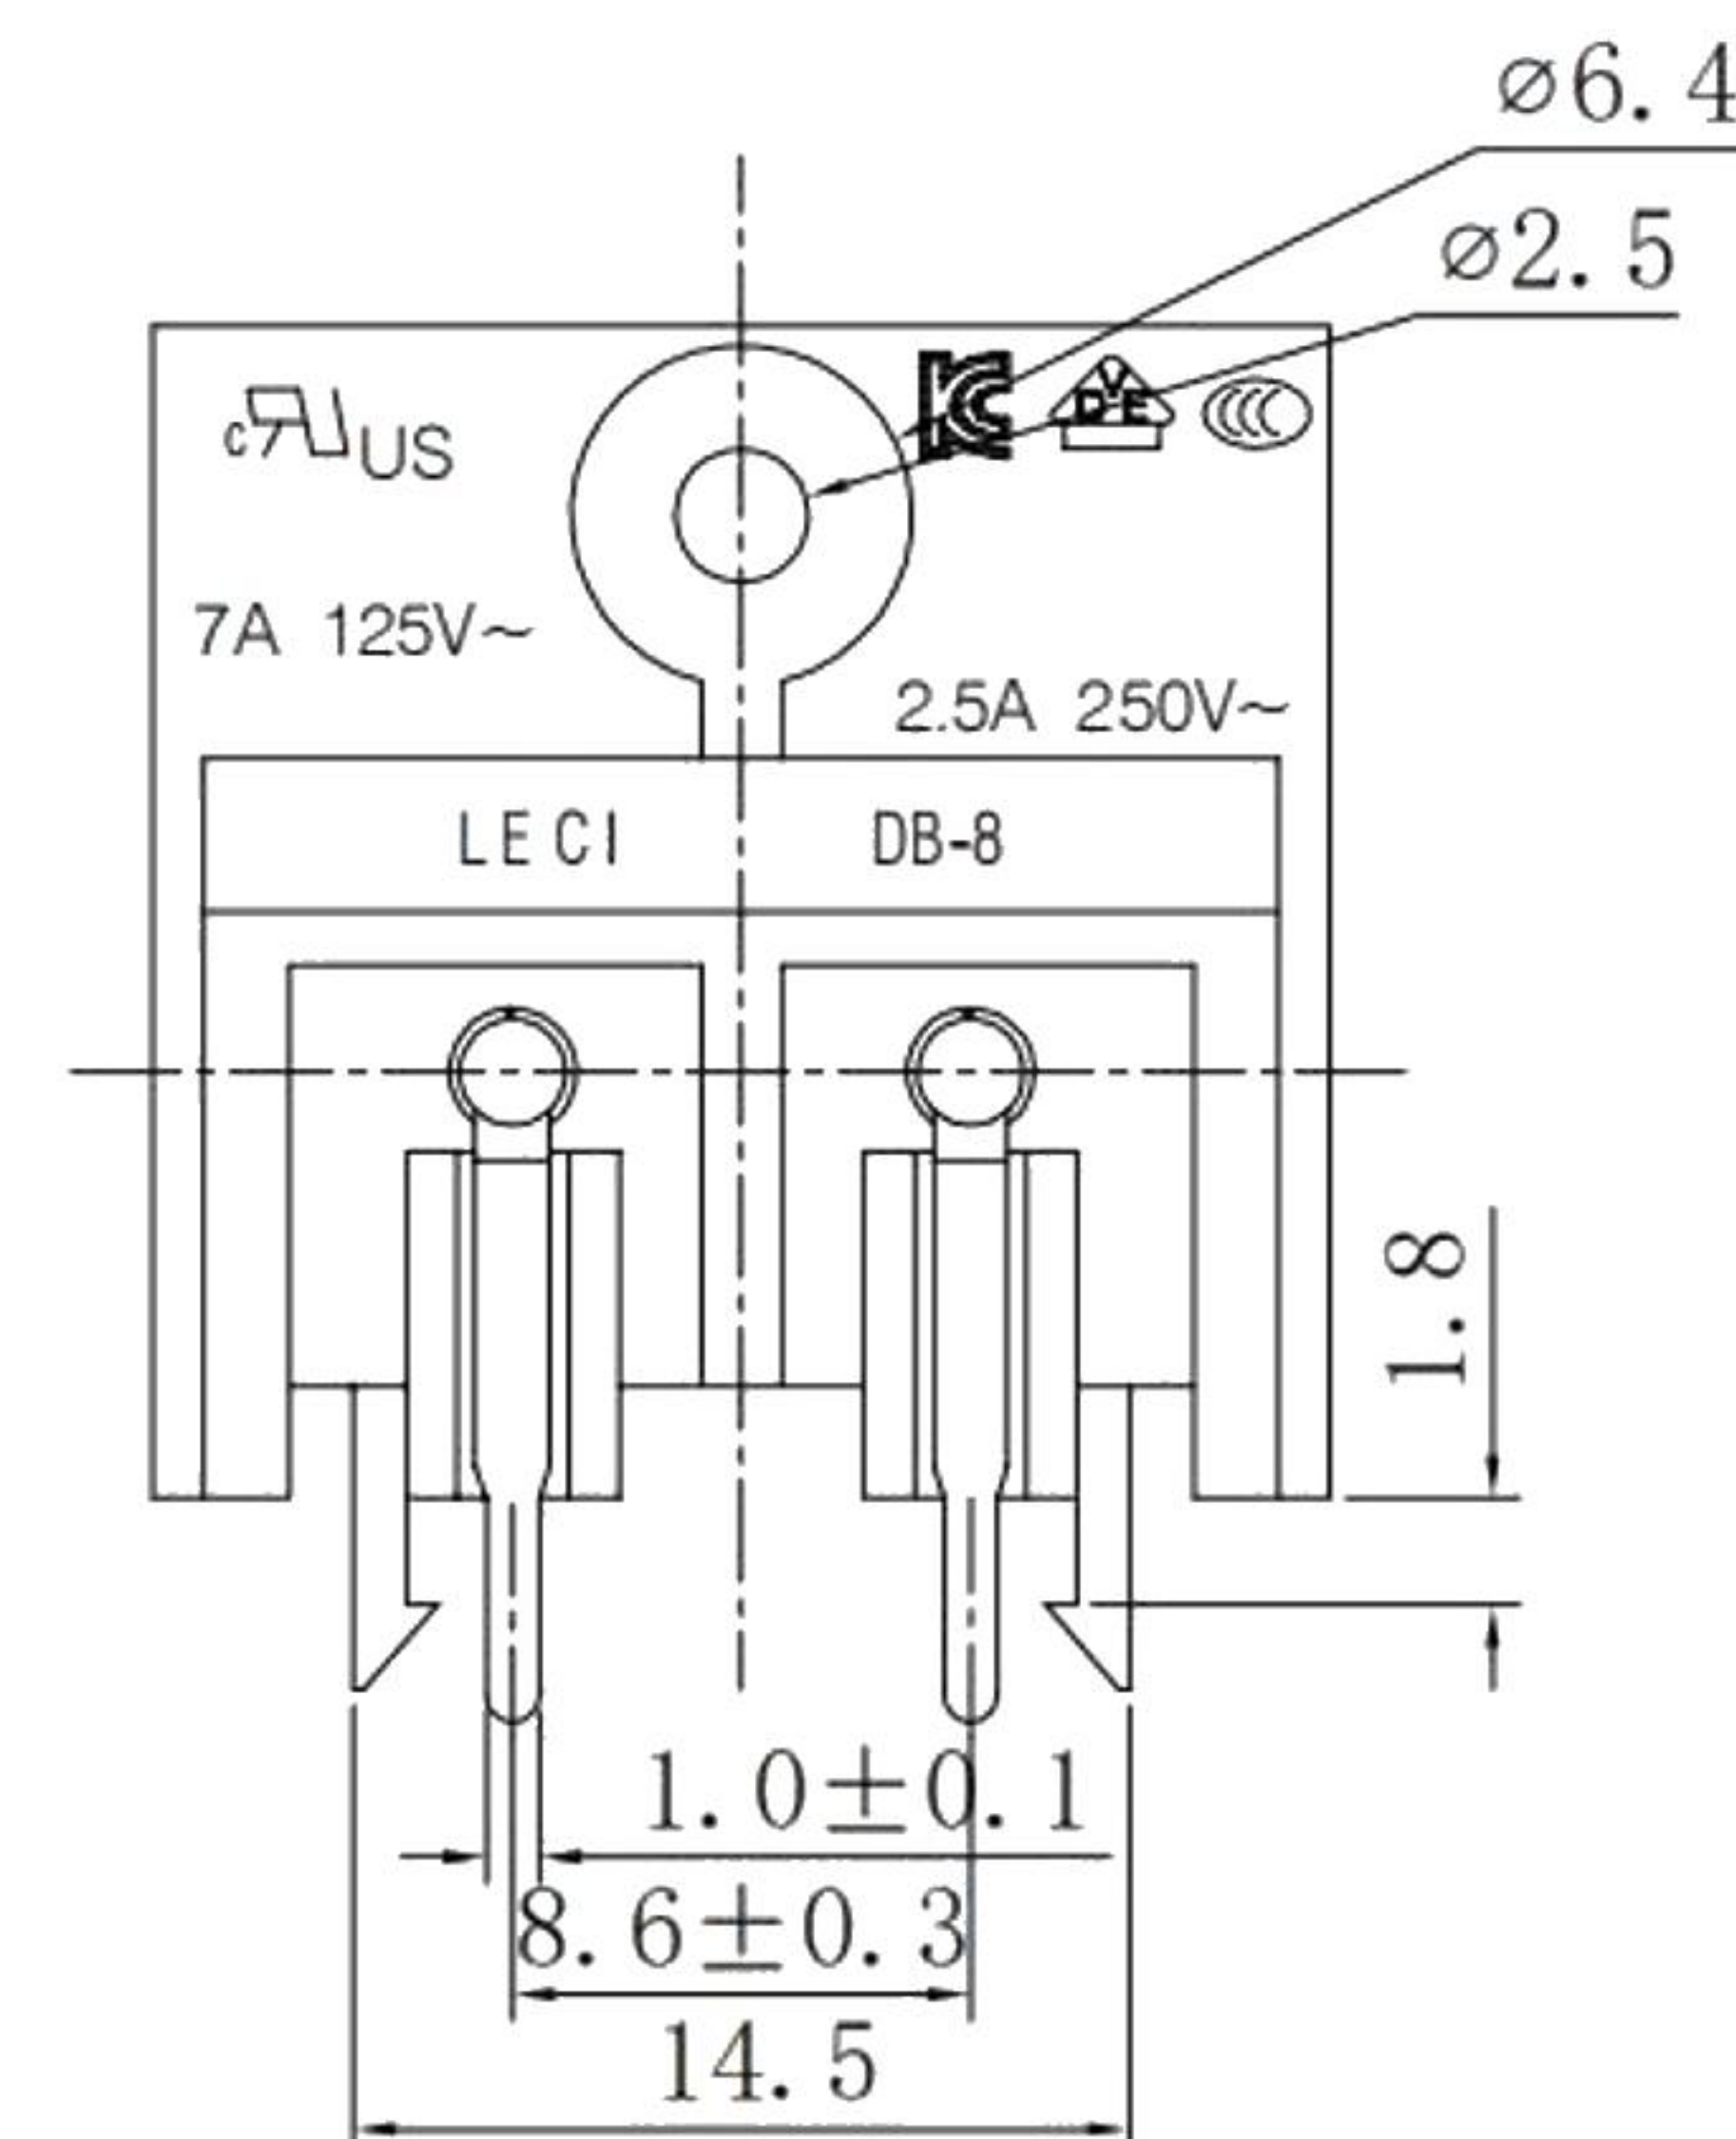
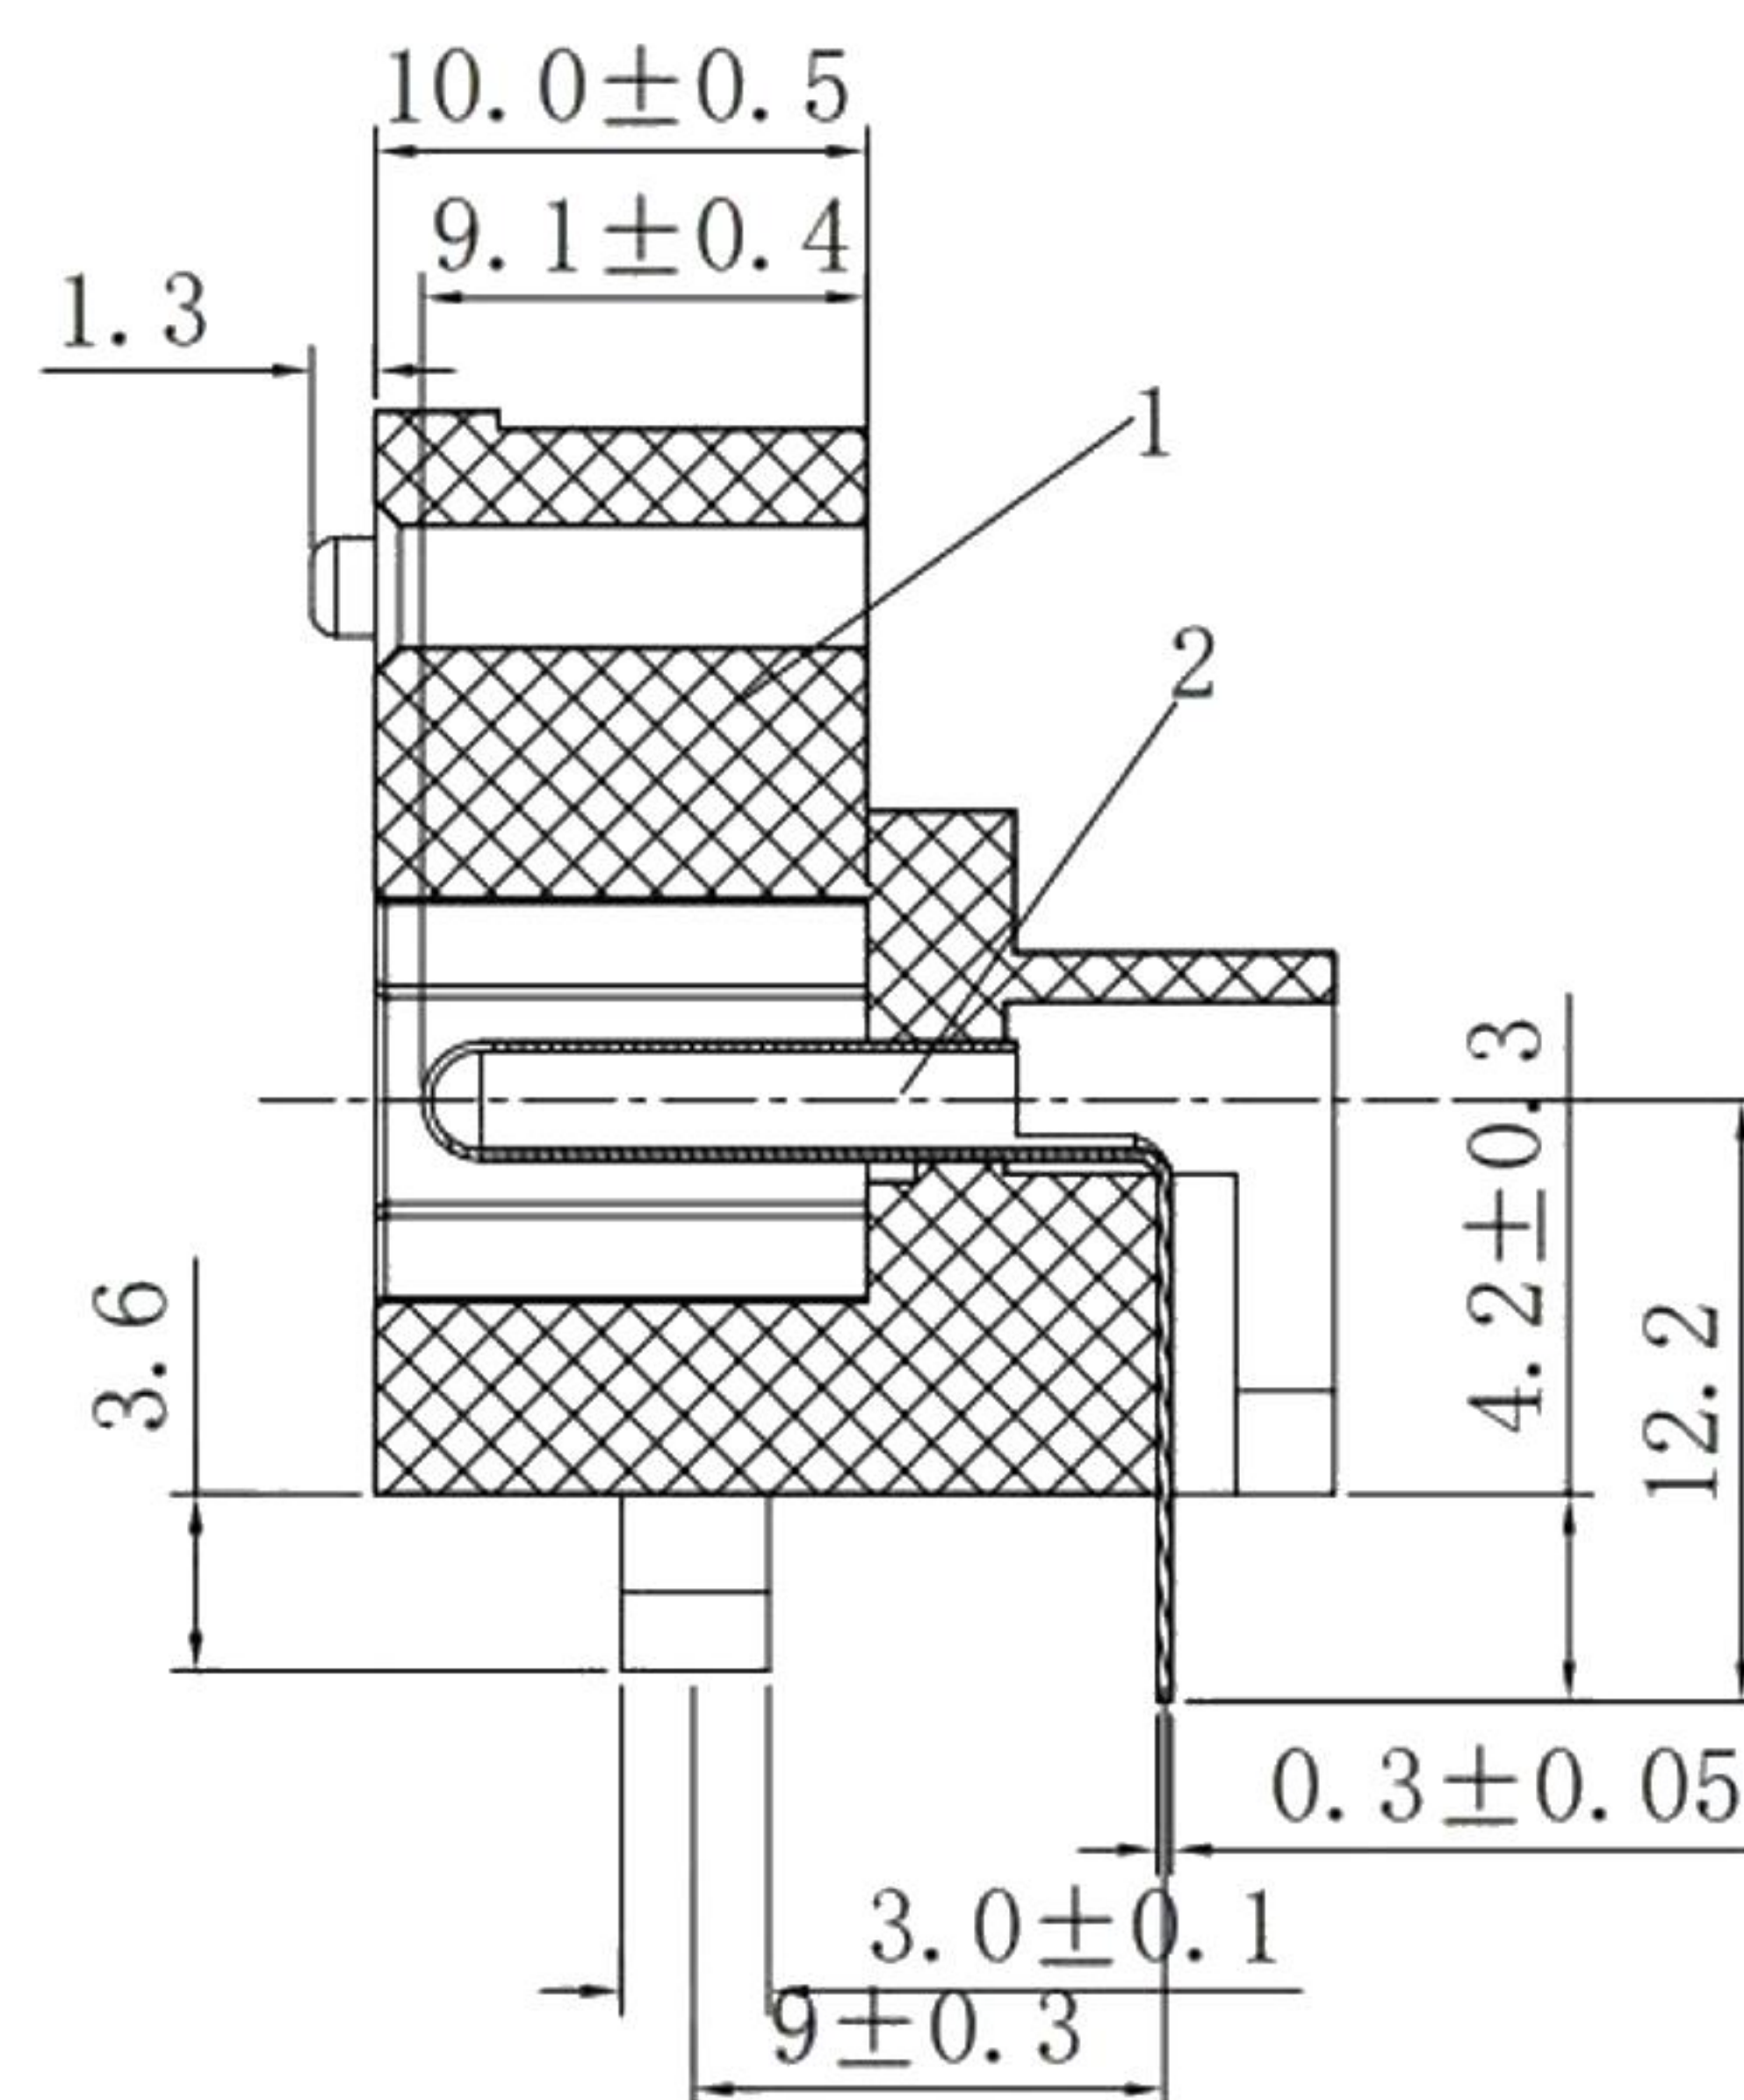


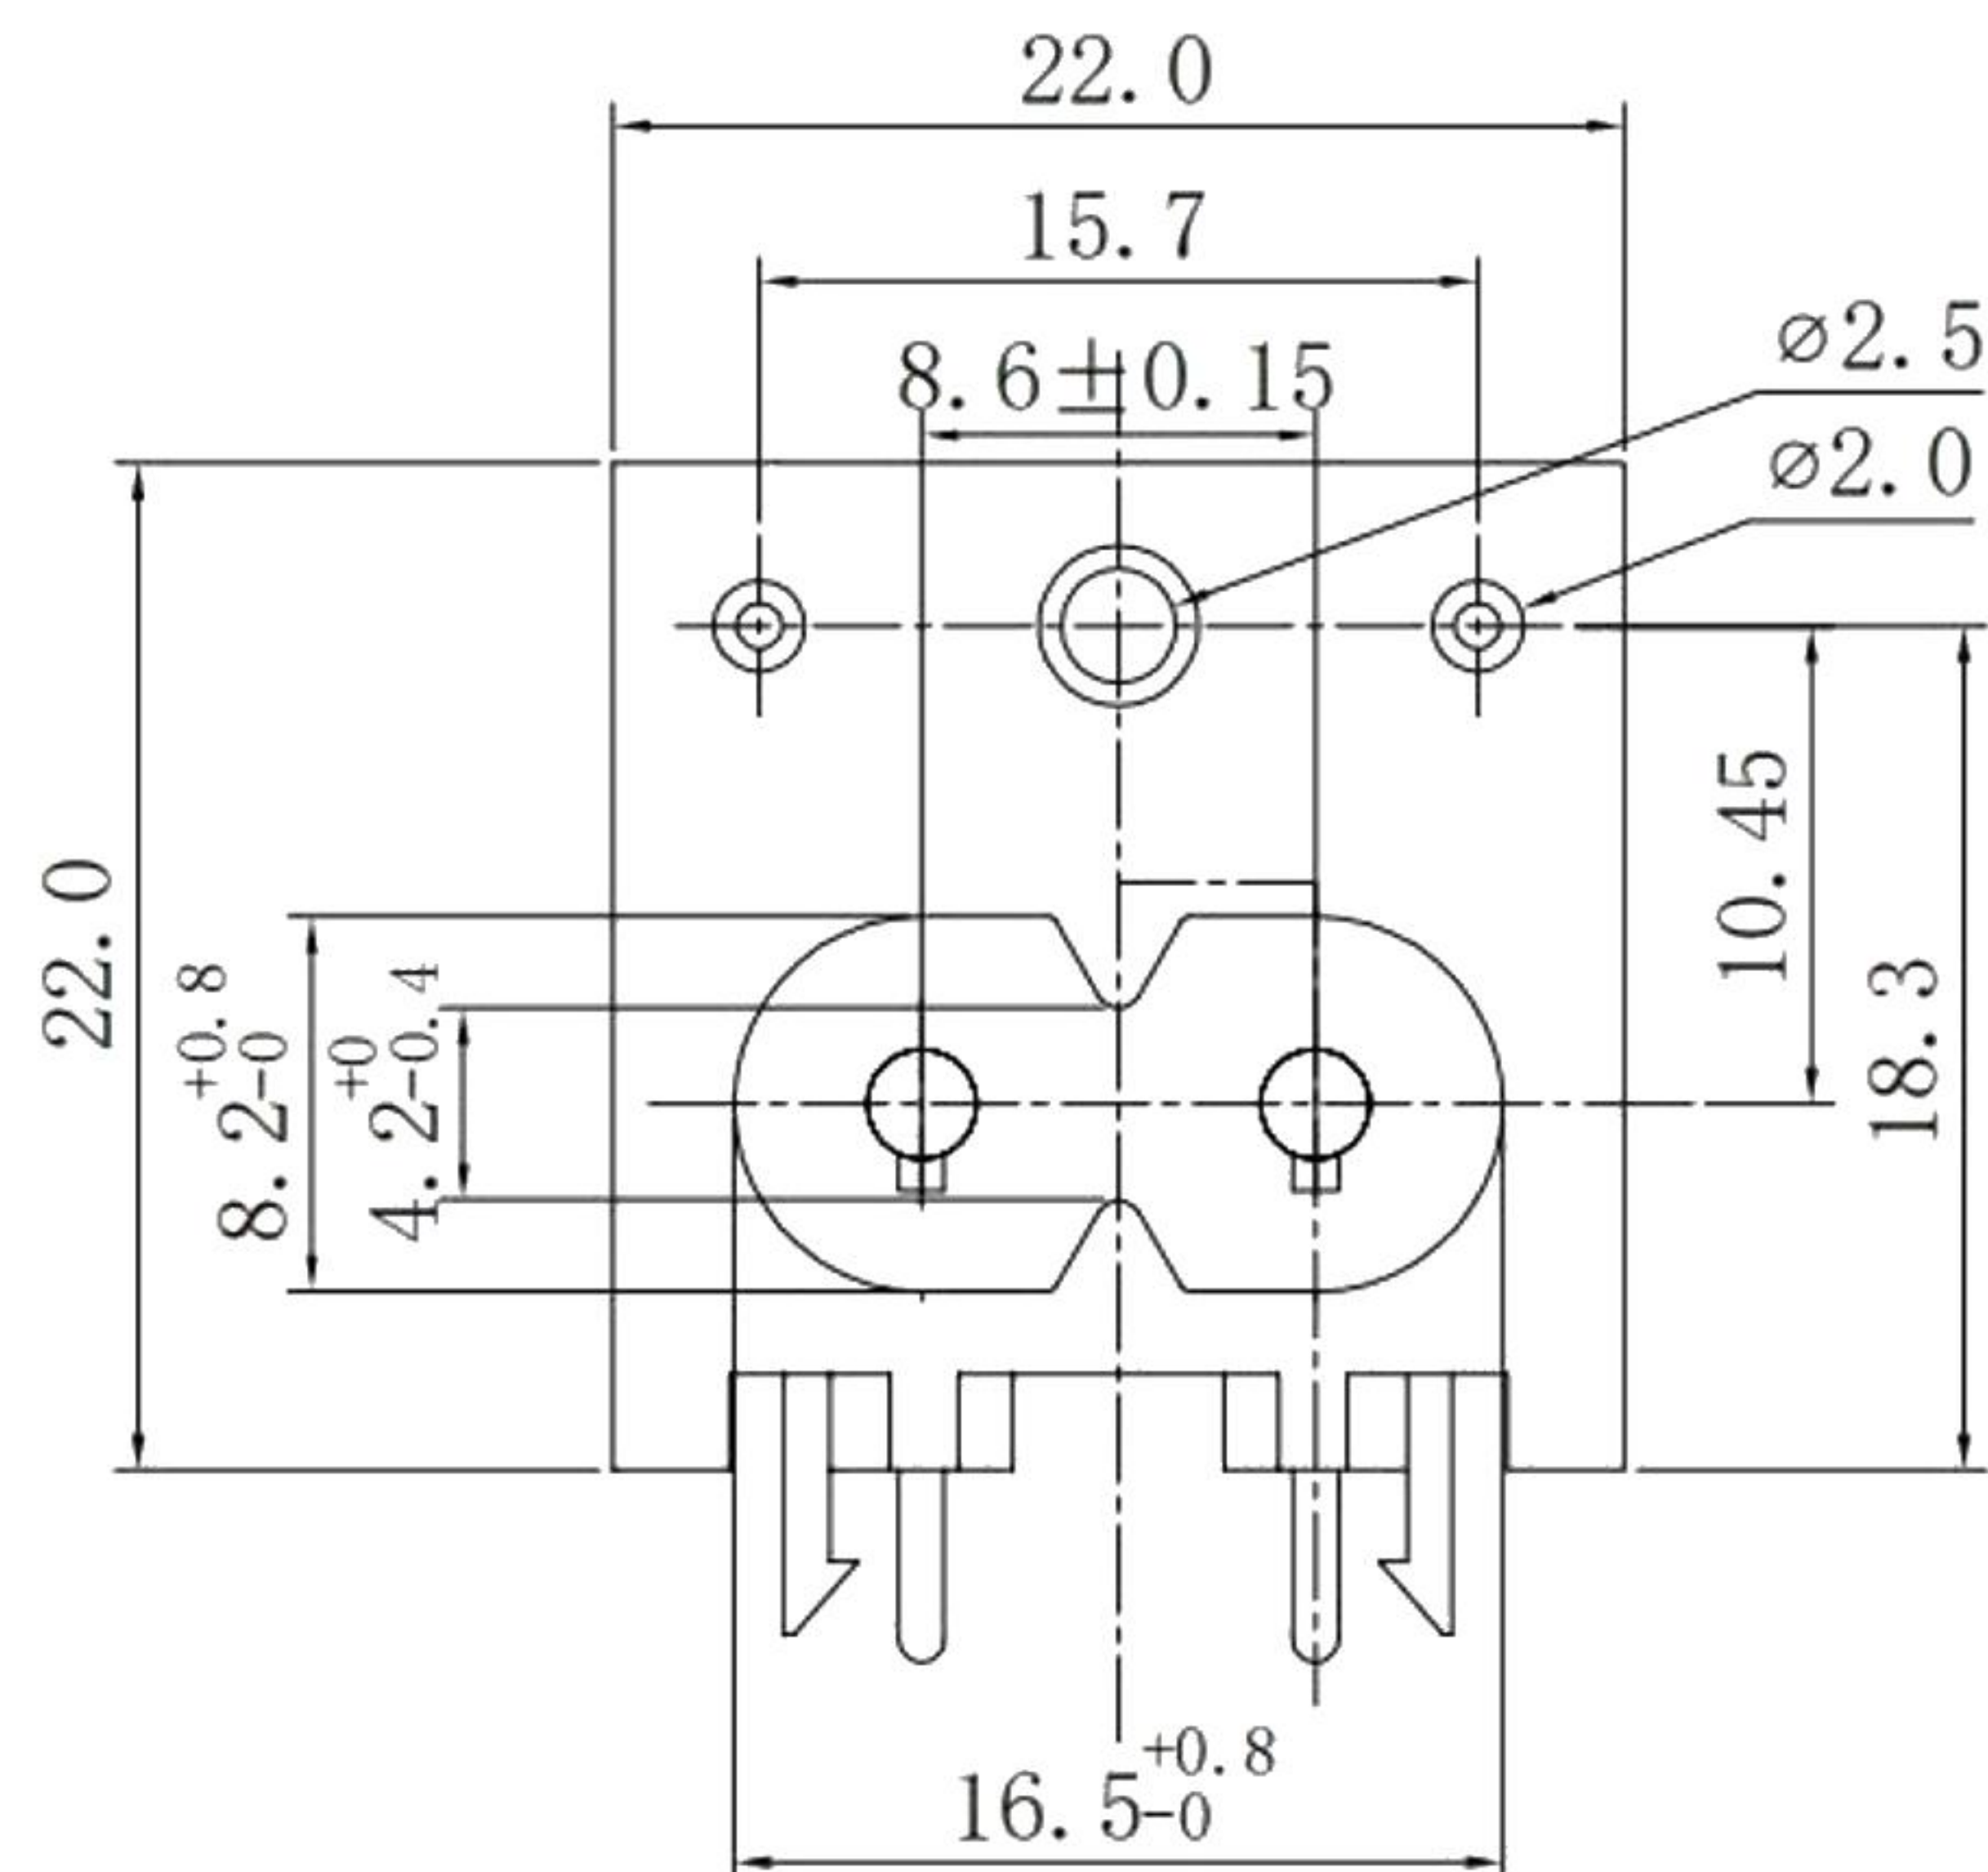

Rating :

7A 125V AC UL cUL
2.5A 250V AC VDE 3C KC

Terminal Strength: 20N~50N

Operating Life: ≥6000 cycles

Withstand Voltage: Between all terminals: 2500VAC(50-60Hz)1min
terminals to Base: 3750V AC(50-60Hz)1min
Leakage Current: 1mA

Insulation Resistance: ≥100MΩ 500V DC

Body Material: NYLON 66 94V-2~0

42*28*27cm箱, 50只*24吸盒装=1.2k件, 净重:6 毛重:7.5=KG,

序号	名称	材料	处理	数量	备注
1	DB-8-20塑料件	环阻PA66	黑色	1	
2	DB-8-R5空心针	黄铜	镀锡	2	Plating Thickness >80u"

A4				普通公差		 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.								
A3				COMMON TOLERANCE		:								
A2				UP TO 5	±0.20	单 位	mm	投 影		品 名	Ac Inlet C8型	比 例	Free	
A1				ABOVE 5 TO 30	±0.30	绘 图	金泽水	核 对		型 号	/DB-8			
				ABOVE 30	±0.50									日 期
REV.	DATE	REVISION	DESCRIPTION	ISSUE	ANGULAR	±5°								