

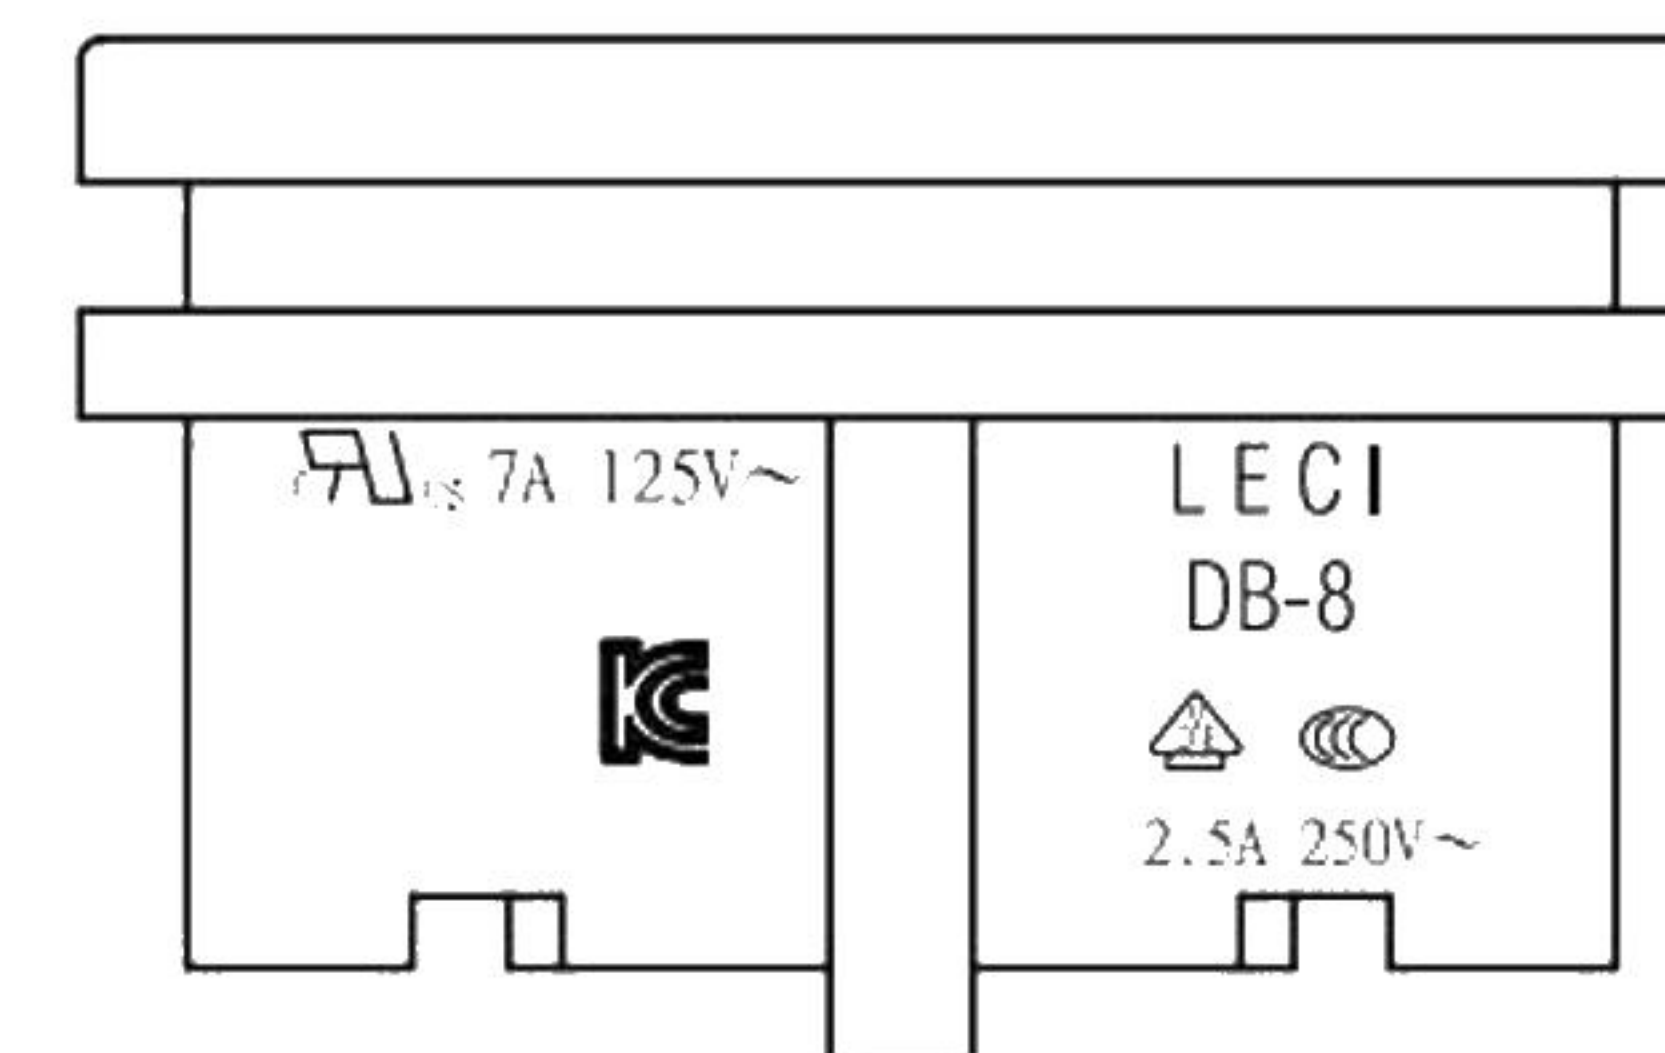
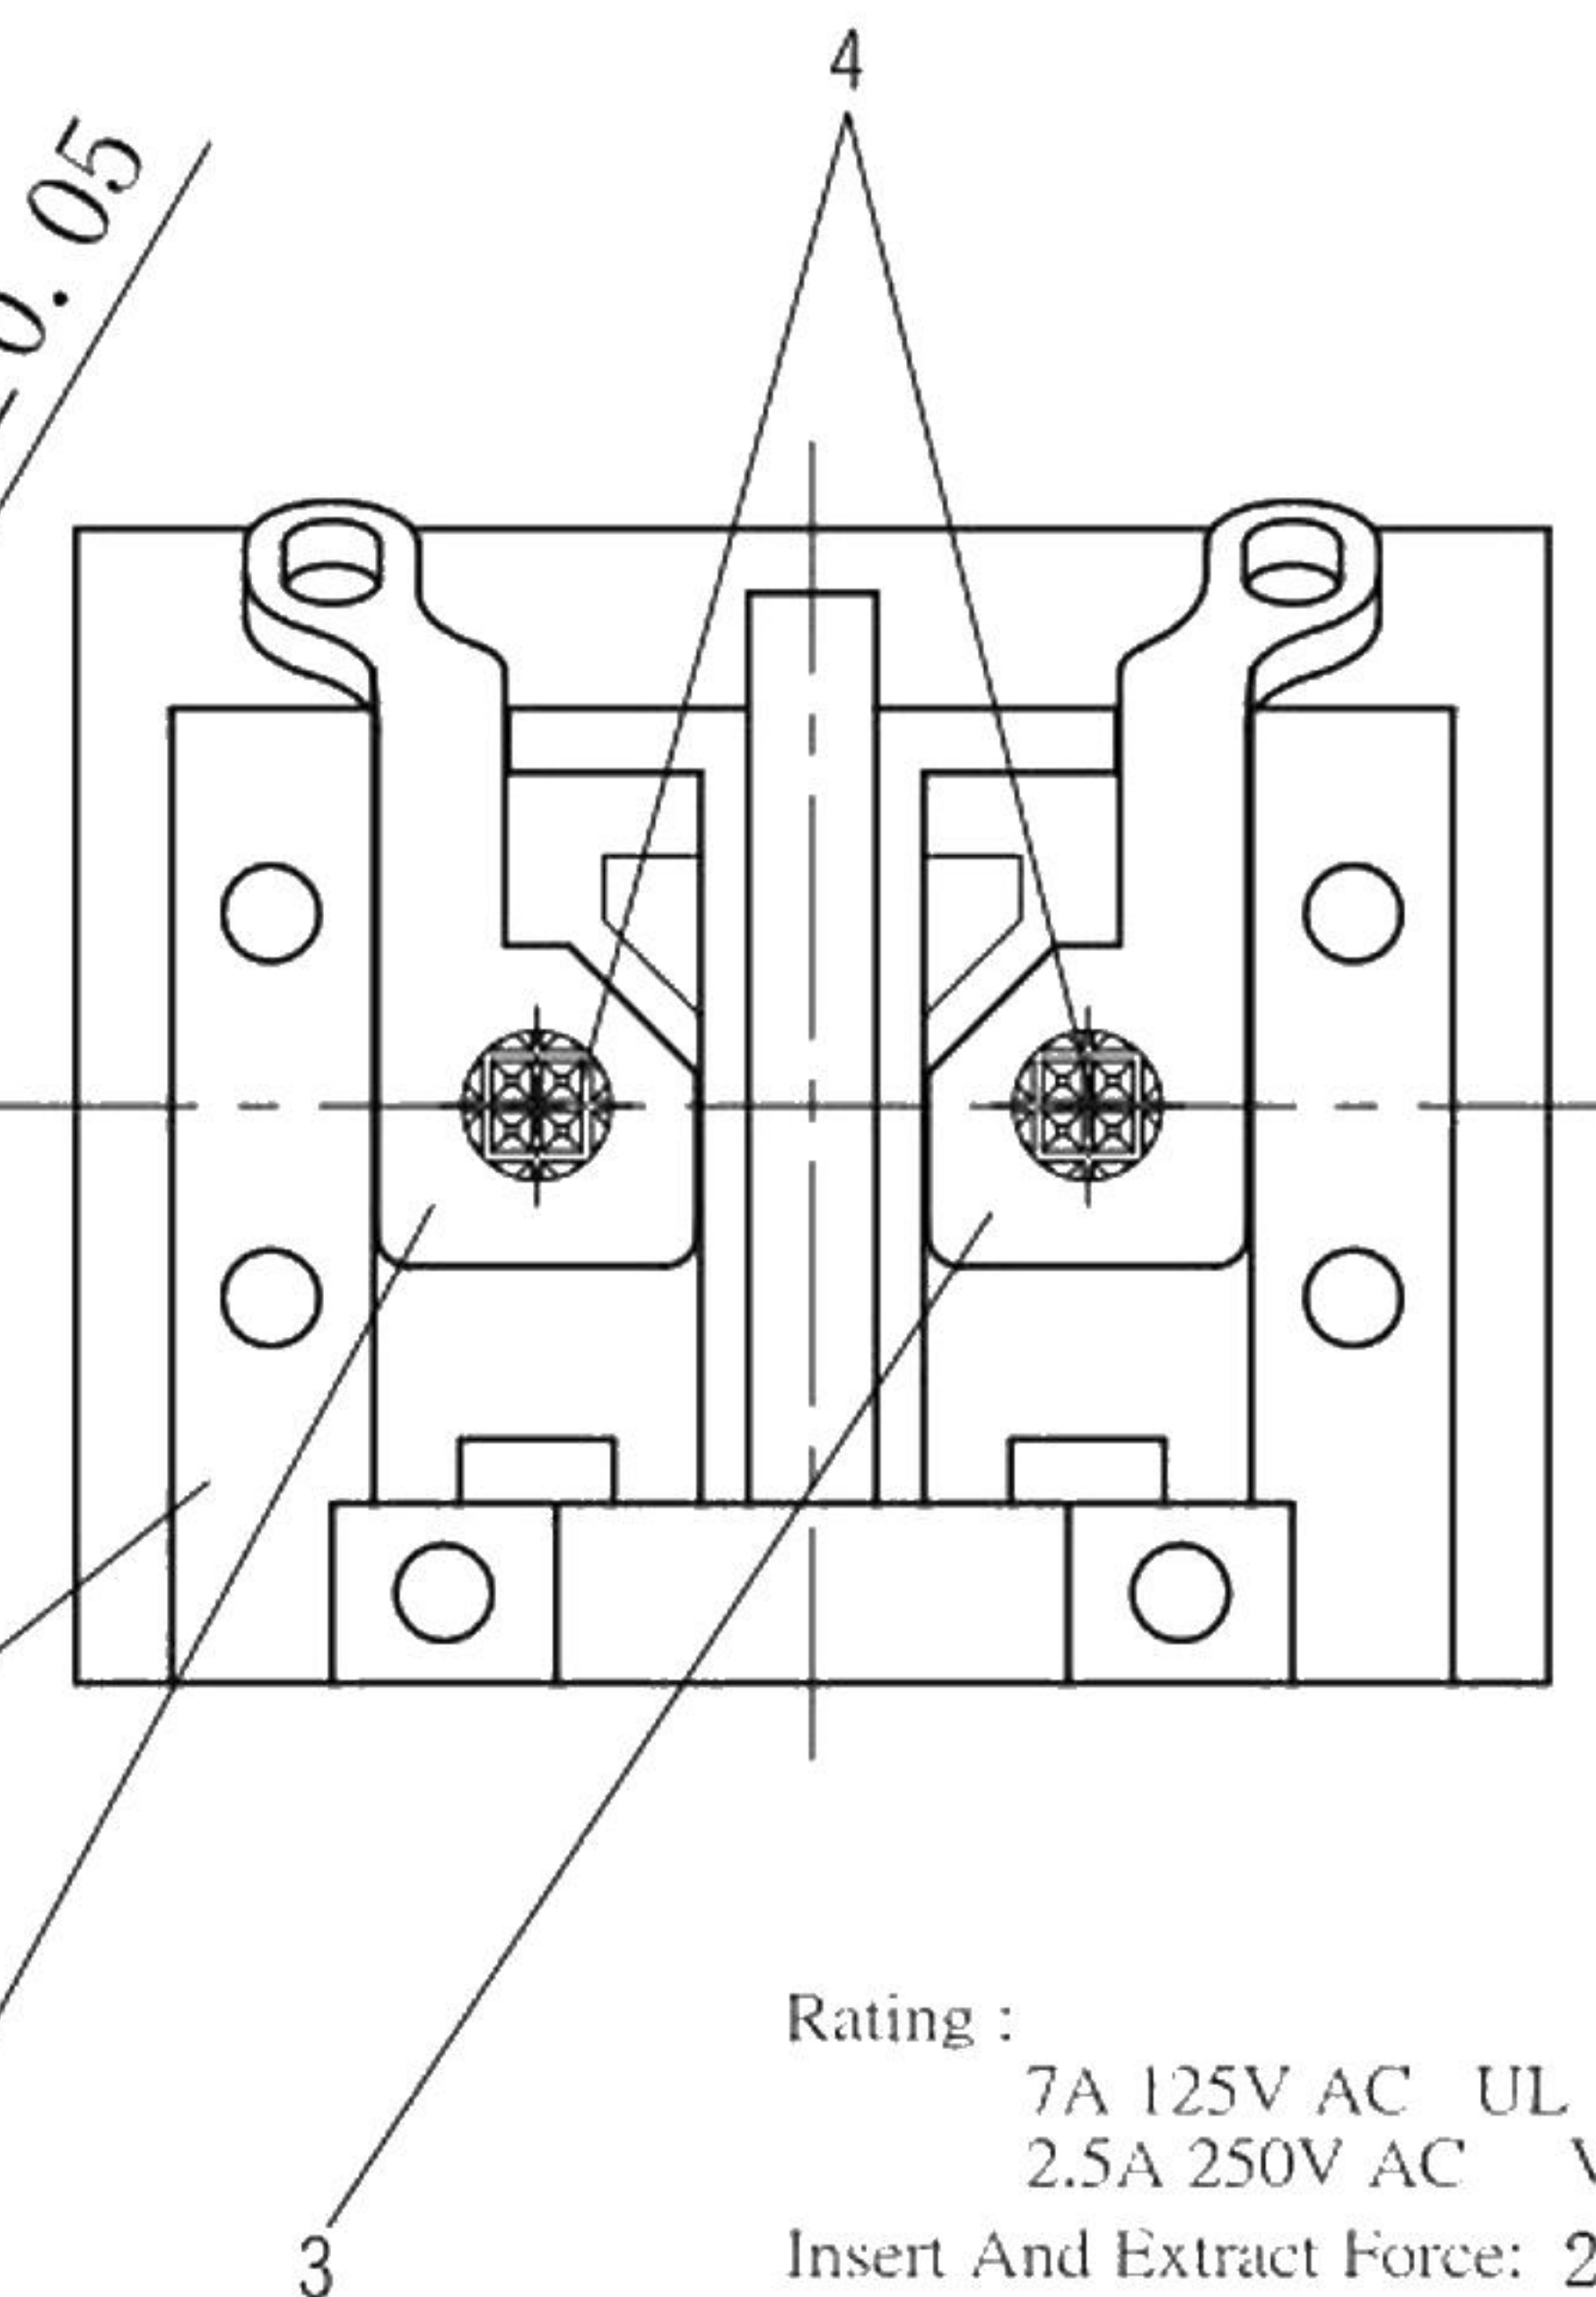
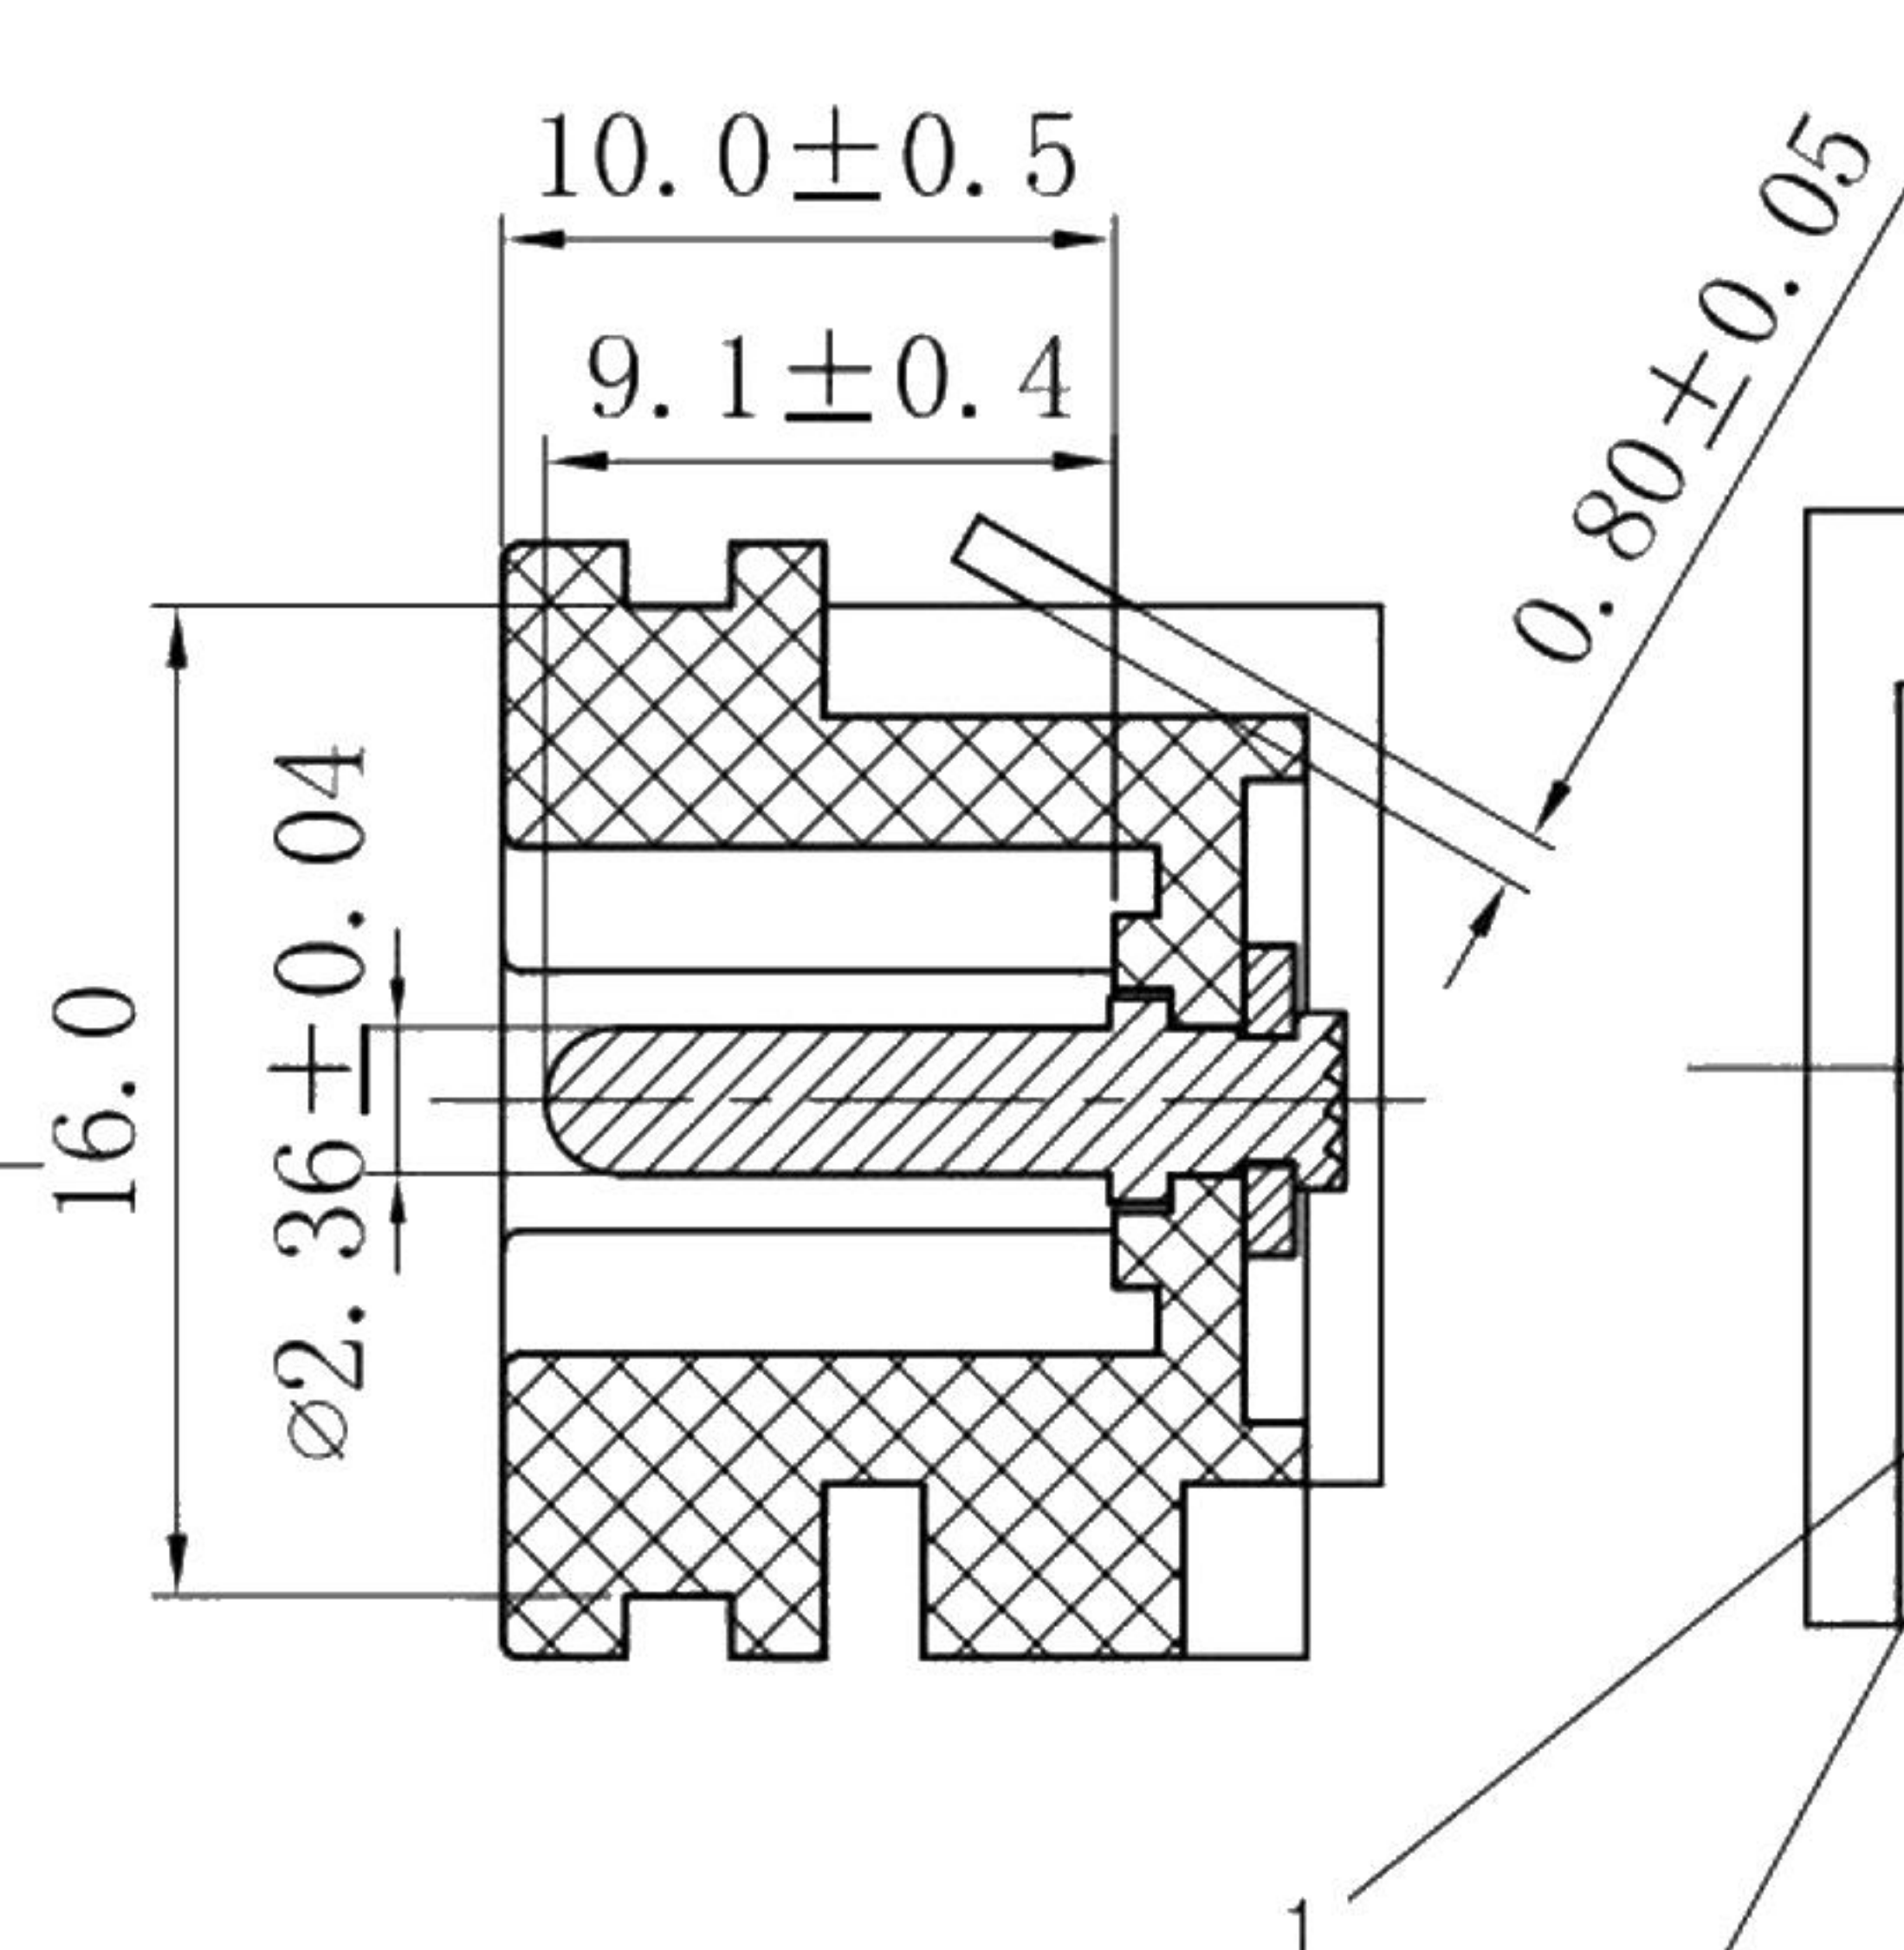


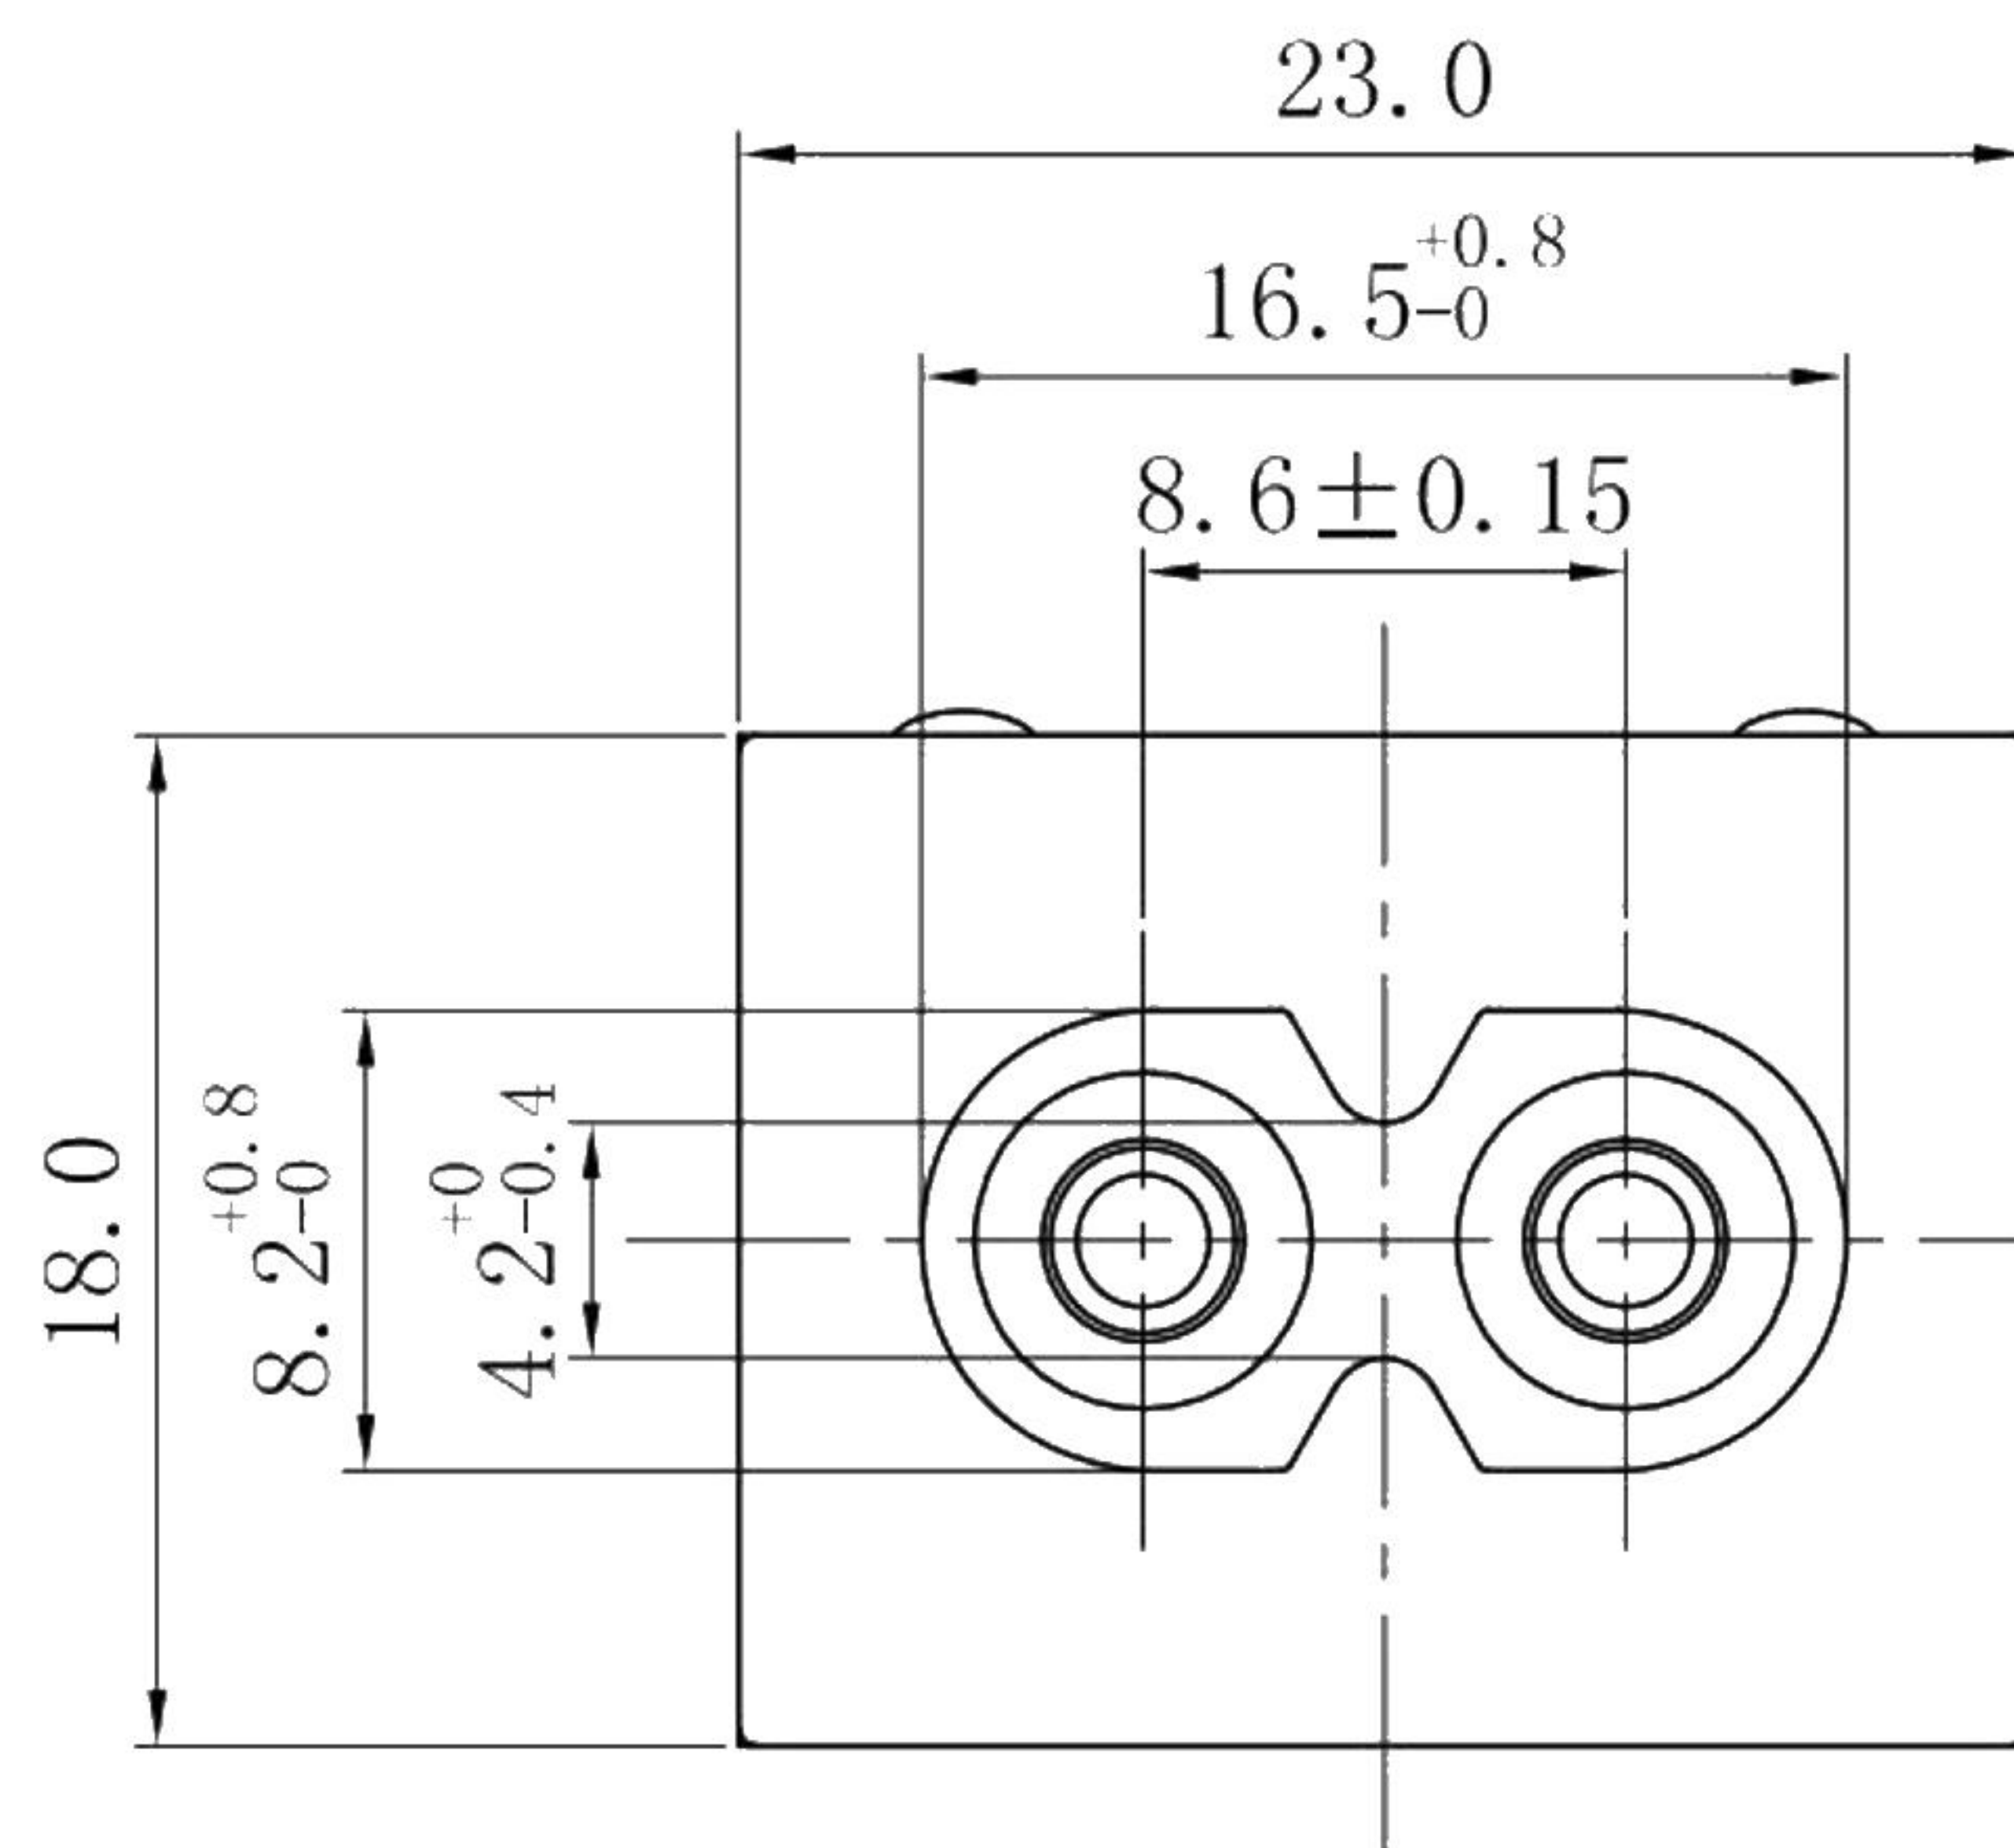

Rating :
 7A 125V AC UL cUL
 2.5A 250V AC VDE 3C KC
 Insert And Extract Force: 20N~50N
 Operating Life: ≥6000 cycles
 Withstand Voltage: Between all terminals:2500VAC (50-60Hz)1min
 Terminals to Base:3750V AC (50-60Hz)1min
 Leakage Current : 1mA
 Insulation Resistance: ≥100MΩ 500V DC
 Body Materil: PC 94V-2~0

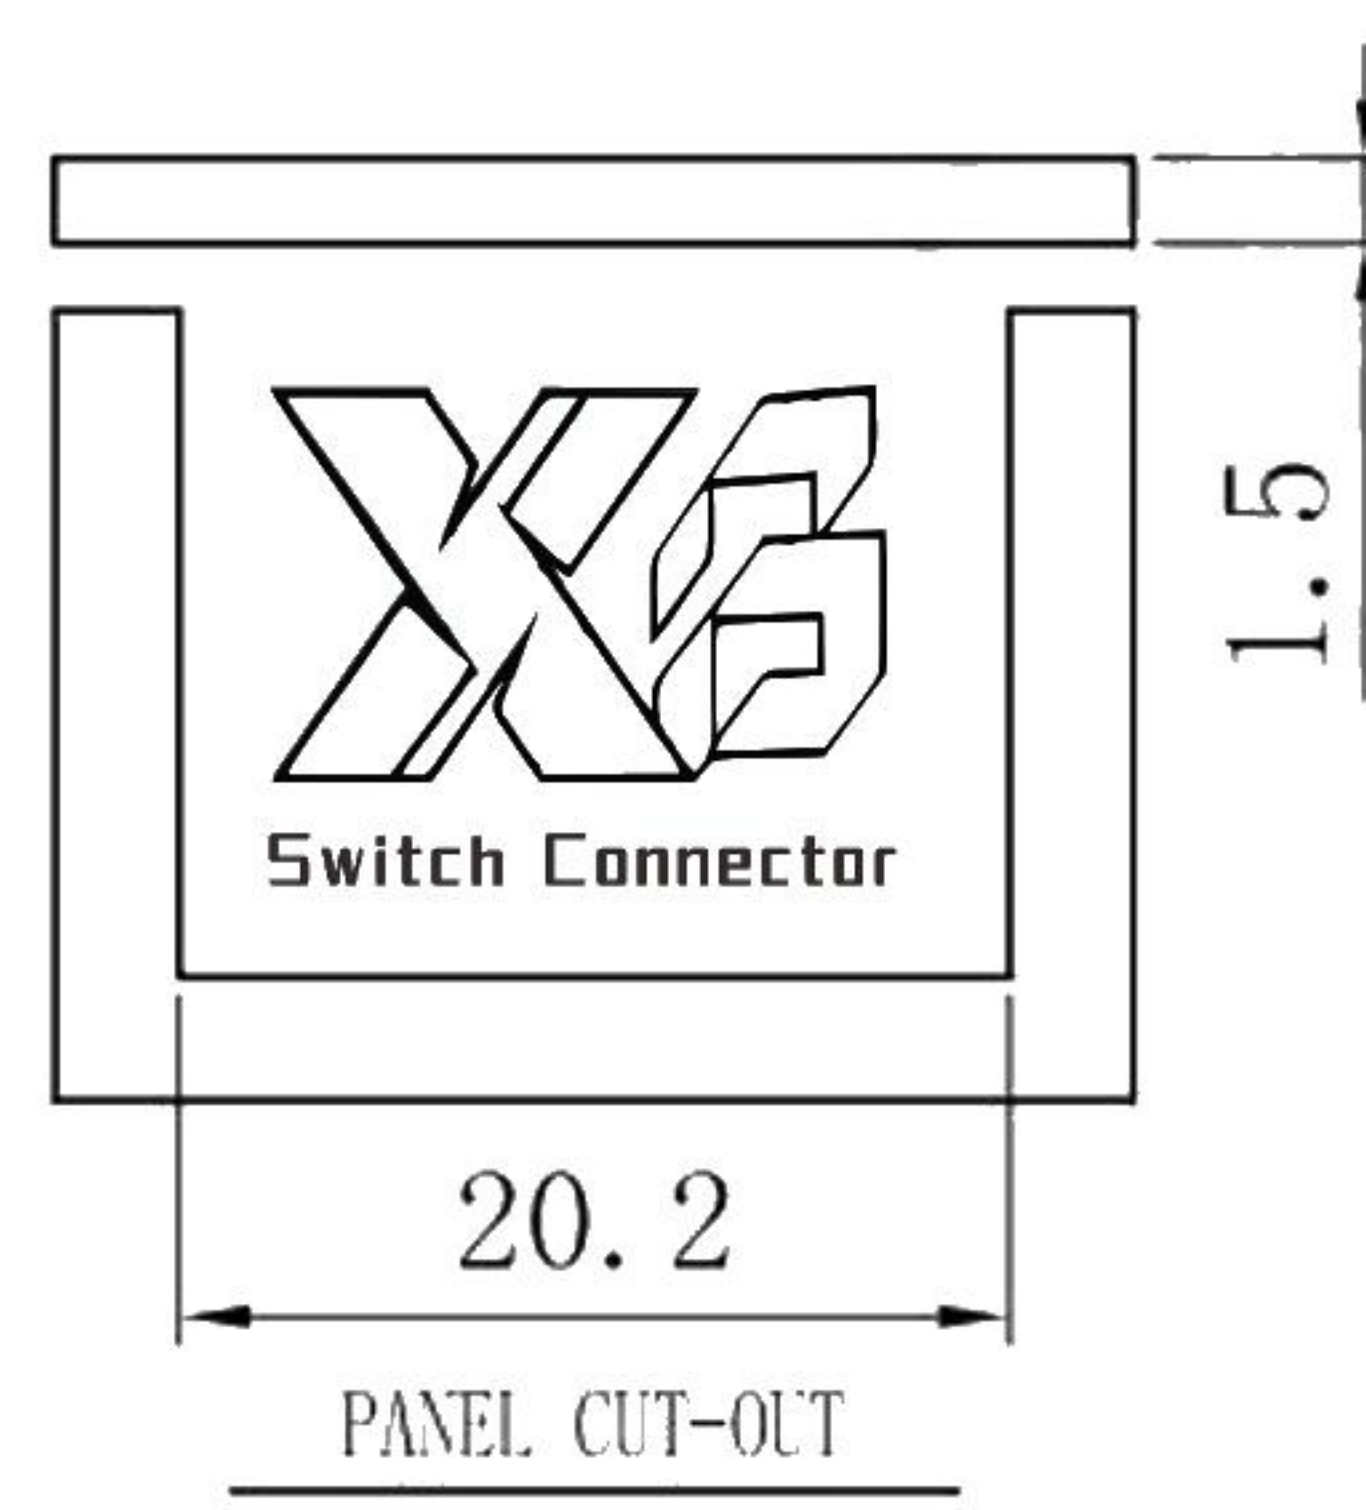

序号	名称	材料	处理	数量	备注
1	DB-8-21塑料件	PC	黑色	1	
2	DB-8-S8L端子	黄铜	镀锡	1	Plating Thickness >80u''
3	DB-8-S8R端子	黄铜	镀锡	1	Plating Thickness >80u''
4	DB-8-2DX圆针	黄铜	镀镍	2	Plating Thickness 40u''-80u''

55*32*25cm箱, 200只*20袋装=4K件, 净重:19.2 KG, 毛重:21.2=KG,

A4				普通公差:	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.						
A3				COMMON TOLERANCE :							
A2				UP TO 5	±0.20	单位	mm	投影	Ac Inlet C8型	比例	Free
A1				ABOVE 5 TO 30	±0.30	绘图	金泽杰	核对应	型号	'DB-8	
REV.	DATE	REVISION DESCRIPTION	ISSUE	ABOVE 30	±0.50	日期	2021/10/19	核准	料号		
				ANGULAR	±5°				DB-8-21S8-ZP		