



主要技术参数、性能
Main technical parameter, performance

项目 Project	参数 Parameter
电路图 Circuit diagram	2P ON-OFF 
额定电流、电压 Rating	VDE 6(4)A 250VAC μ
	UL cUL 10A 125VAC
	UL cUL 6A 250VAC
	CQC 6A 250VAC T85
	CQC 6A/125A 250VAC
绝缘电阻 Insulation resistance	EK 6(4)A 250VAC
	$\geq 100M\Omega$
接触电阻 Contact resistance	$\leq 20m\Omega$
耐电压(端子与端子) Withstand voltage	$\geq 1500VAC/5S$
(极对按钮) Terminals to button	$\geq 3000VAC/5S$
电气寿命 Electrical life	$\geq 1 \times 10^4$ Cycles
端子强度 Terminal strength	$\geq 80N$

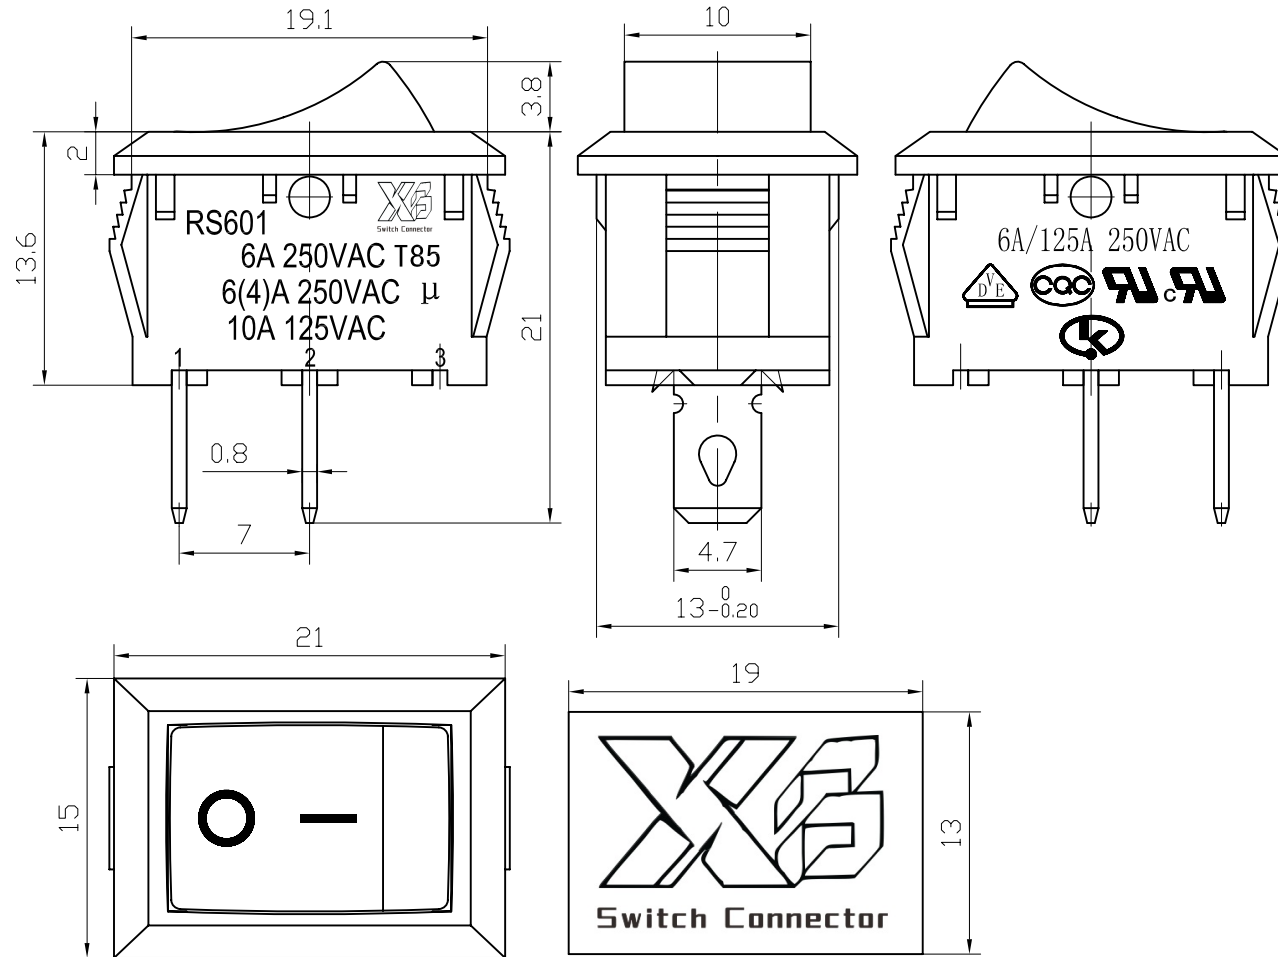

版本 Addition	修改 Revision	核准 Approval	日期 Date	普通公差: 0~3 ± 0.05 ; 3~6 ± 0.10 ; Common Tolerance 6~30 ± 0.20 ; 30~- ± 0.30 ;			 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			成品图 Product's Drawing	
							比例 Scale	Free	名称 Name	跷板开关	
				设计 Drawn by	周益强	日期 Date	2007.07.26	单位 Units	mm	料号 Part NO.	RS601
				审核 Checked by	周培雷	核准 Approved by	张光良	投影 Projected		图号 File No.	RS601-10111BB