



cec 5(2)A 250V~ 5E4 T85μ

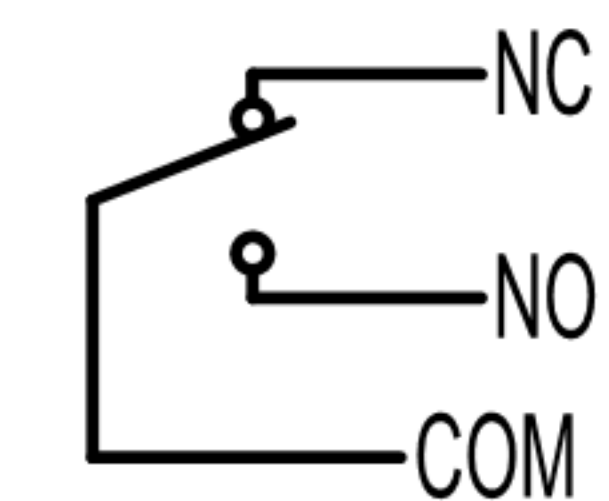

SCHEMATIC

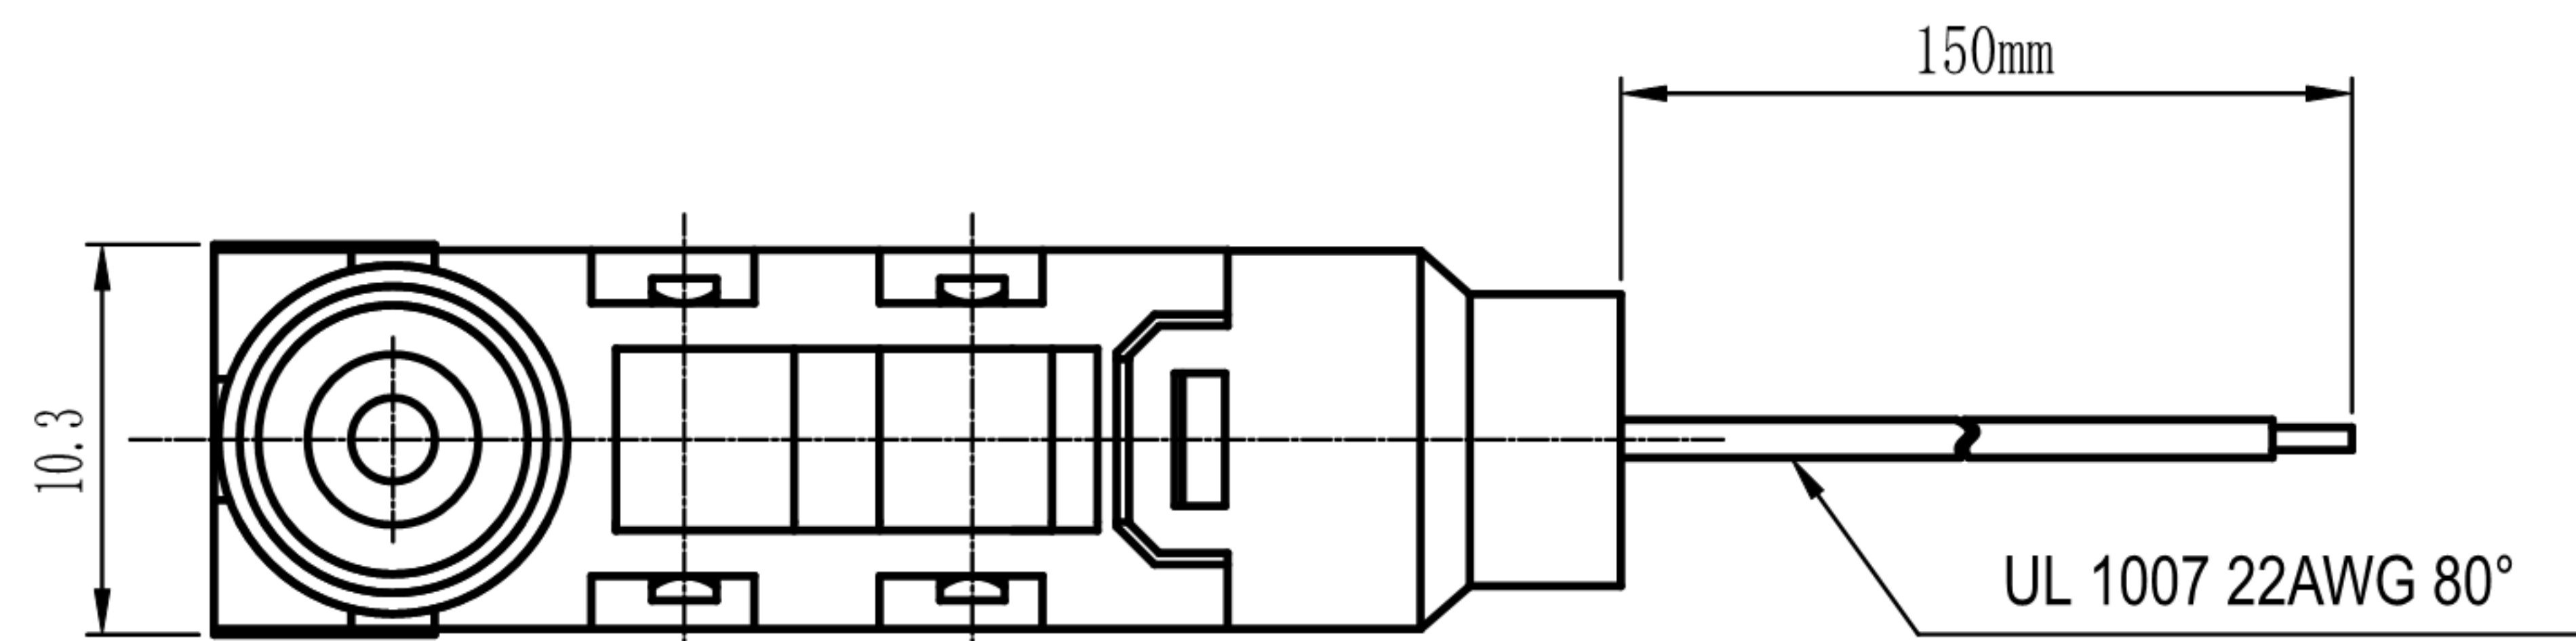

1. 技术参数

序号	技术参数值(Technical Parameters)
1	电气额定值(Electrical Rating): 5(2)A 125V/250VAC
2	温度等级(temperature grade): 25T85
3	动作力(OF): 3.0 N(Max)
4	动作行程(PT): 0.6~1.5 mm
5	接触电阻(Contact Resistance): $\leq 50\text{m}\Omega$ (不含线)
6	绝缘电阻(Insulation Resistance): $\geq 100\text{M}\Omega$ (试验电压50VDC)
7	耐压(Withstand Voltage): 端—端500VAC/60S, 漏电流5mA;
	外壳与端子之间1500VAC/60S, 漏电流5mA开关应无击穿现象。
8	电气寿命(Electrical Service Life): 10000 Cycles
9	外壳防护等级(DEGREE PROTECTION PROVIDED BY ENCLOSURE): IP67
10	

8					TOLERANCE UNLESS SPECIFIED						
7											
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版		ZENQ. CHEN	
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.	
4	CONTACT	SUS	1	Ag CLAD	TITLE : Micro SWitch			UNIT : mm	DRWG NO.: XB-FSK-14		
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEI:			SCALE: 5:1	DWN.	JUN. YANG	2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司			CHK'D	DONG. PANG	2012-9-25	
1	KNOB	PPA	1	BLACK				DONG GUAN XI BANG ELECTRONI CS CO., LTD.			APPD.
NO.	PARTS	MATERIALS	Q'TY	FINISH							