

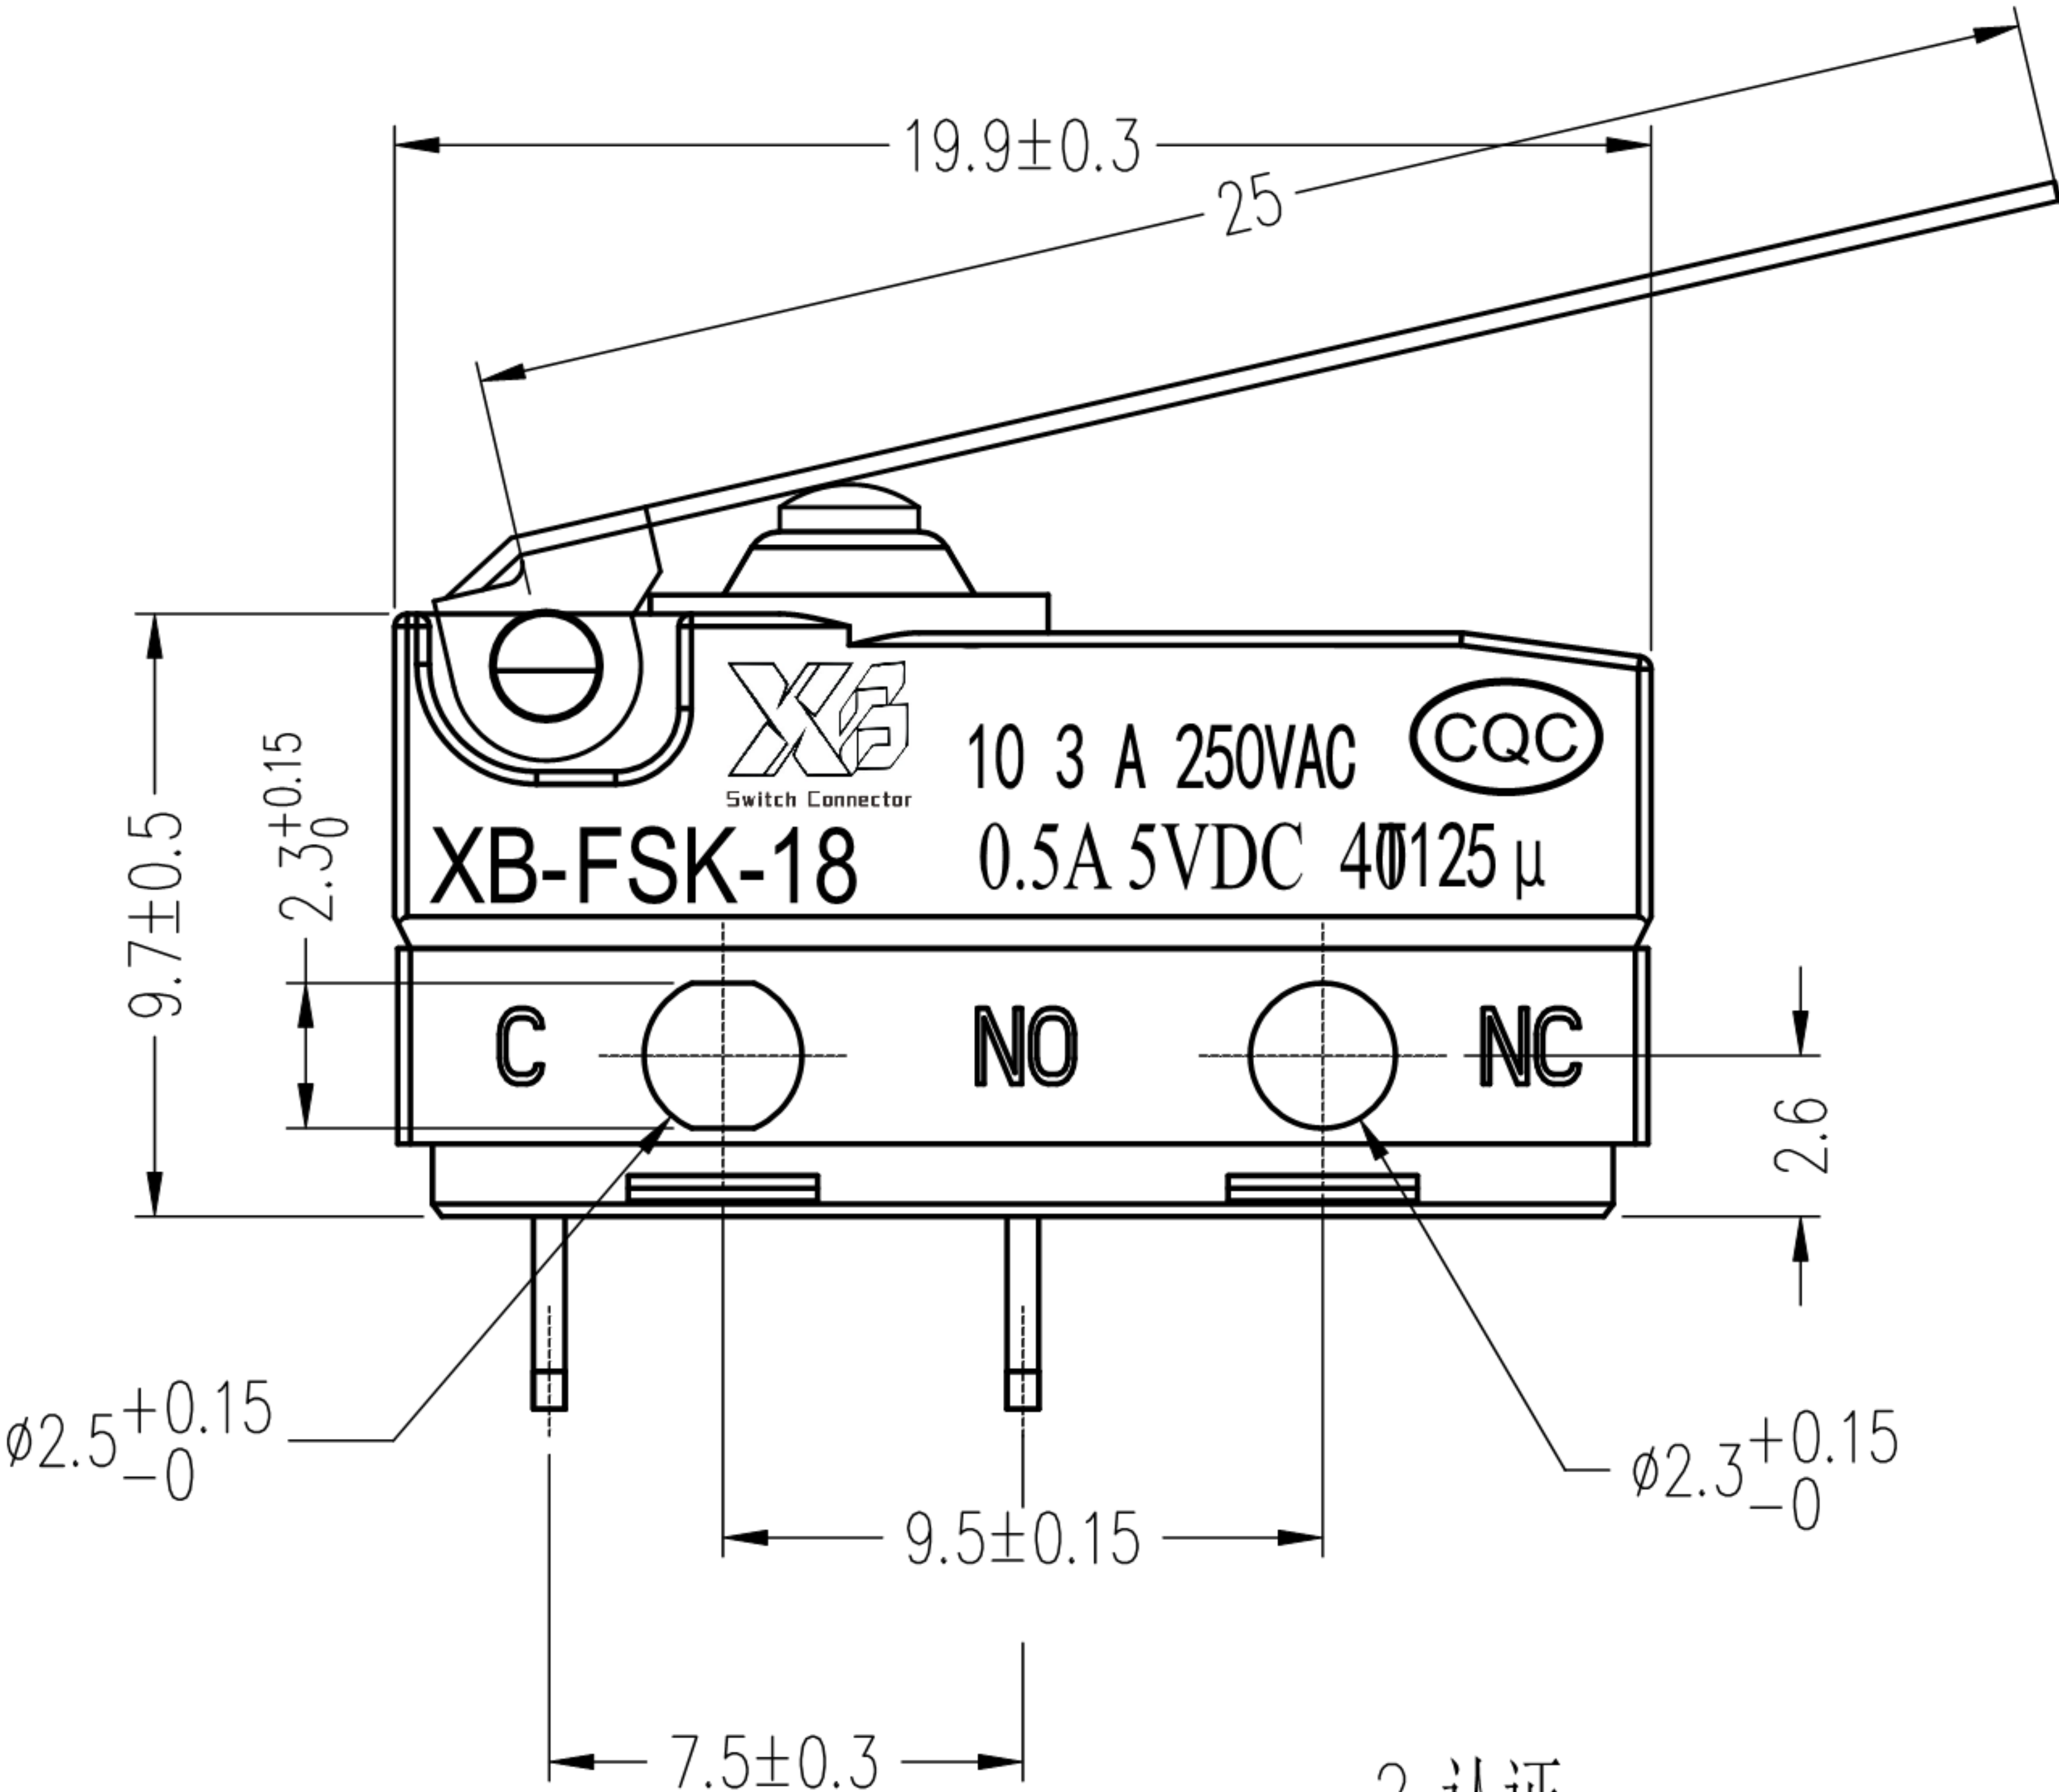


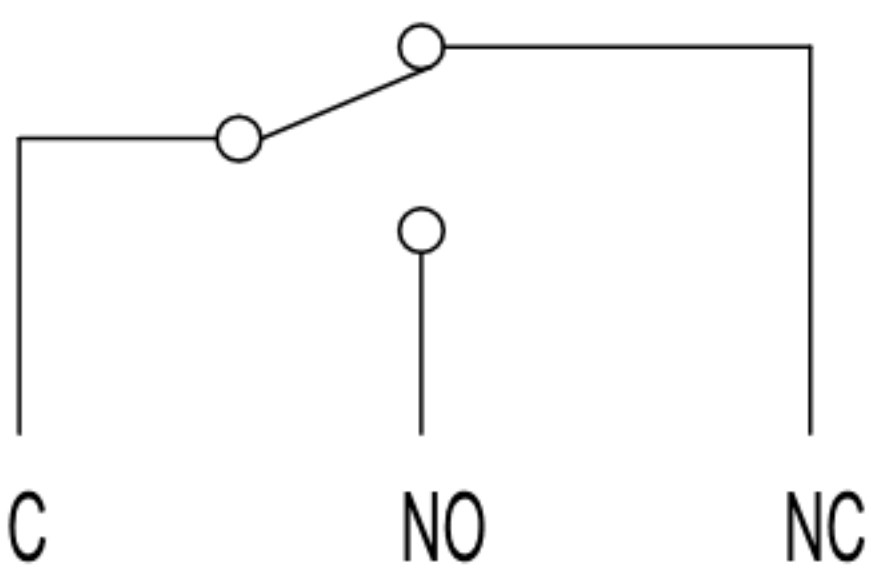

2. 认证:

 10(3)A 250VAC 0.5A 5VDC 40T125μ

  10.1(3)A 125/250V~ 6A 36VDC 40T125μ

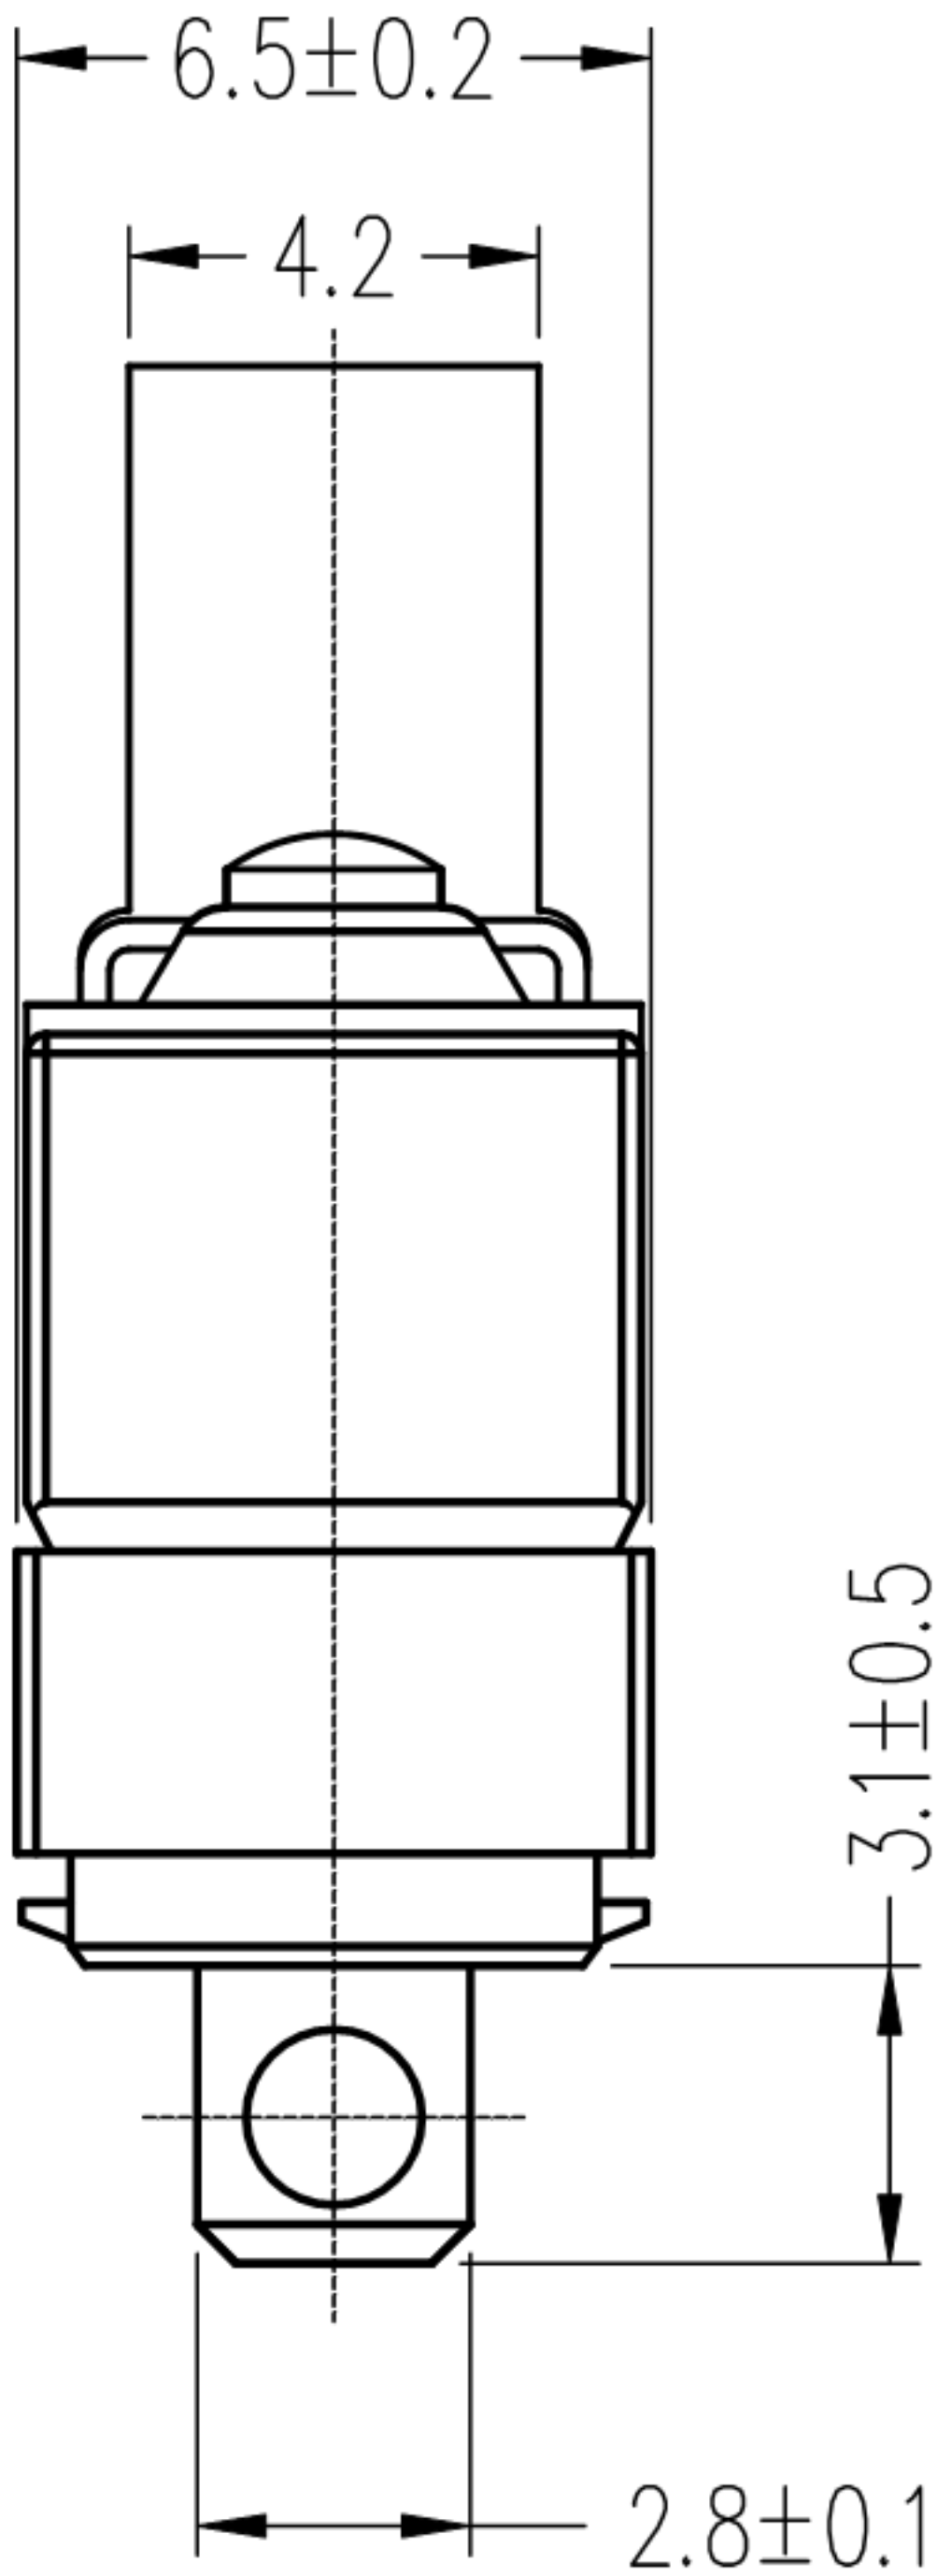

SCHEMATIC

1. 技术参数 (Technical Parameters)

序号	主要技术参数(Main Technical Parameters)
1	电气额定值(Electrical Rating): 10(3)A 250VAC 0.5A 5VDC
2	电气寿命(Electrical lifetime): 1E4 cycles
3	接触电阻(Contact Resistance): ≤50mΩ
4	操作力(Operating force): 1.0±0.6N
5	动作位置(OP): 17.7±1mm
6	耐压(Withstand Voltage): 脚与脚 500V/5S/5mA; 脚与壳 1500/5S/5mA
7	绝缘电阻(Insulation Resistance): ≥100MΩ (Test Voltage 500VDC)
8	漏电起痕指数Proof Tracking Index (PTI): 175V
9	环境温度(Ambient temperature): 125°
10	防护等级: IP67

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版	ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Micro SWitch			UNIT : mm	DRWG NO.: XB-FSK-18-D-1068
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEI:			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED					
1	KNOB	PPA	1	BLACK					
NO.	PARTS	MATERIALS	Q'TY	FINISH	 东莞市溪榜电子有限公司			CHK'D DONG. PANG 2012-9-25	
					DONG GUAN XI BANG ELECTRONI CS CO., LTD.			APPD. ZENQ. CHEN 2012-9-25	