


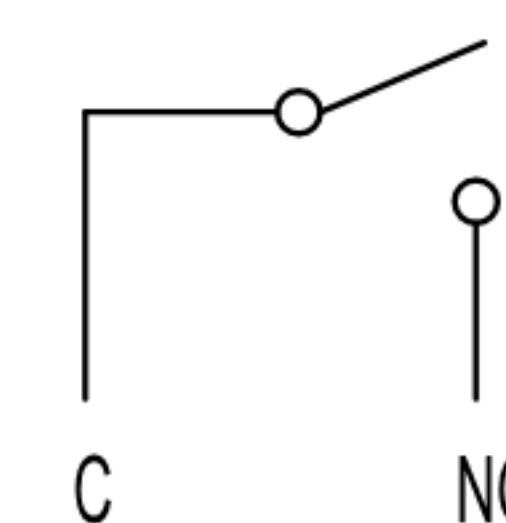

SCHEMATIC

序号	主要技术参数(Main Technical Parameters)
1	电气额定值(Electrical Rating): 0.5A 5VDC/10(3)A 250VAC
2	电气寿命(Electrical lifetime): 5E4 cycles/1E4 cycles
3	机械寿命(Mechanical lifetime): Min.500000 cycles
4	接触电阻(Contact Resistance): $\leq 50m\Omega$ (不含线)
5	操作力(Operating force): $0.8 \pm 0.6N$
6	自由位置(FP): $17.5 \pm 1mm$
7	动作位置(OP): $15.5 \pm 1mm$
8	耐压(Withstand Voltage): 脚与脚 500V/60S/5mA;脚与壳 1500/60S/5mA
9	绝缘电阻(Insulation Resistance): $\geq 100M\Omega$ (Test Voltage 500VDC)
10	漏电起痕指数Proof Tracking Index (PTI): 175V
11	环境温度(Ambient temperature): 40T125°
12	防护等级: IP67

CQC 10(3)A 250VAC 0.5A 5VDC 40T125μ

cALus  10.1(3)A 125/250V~ 6A 36VDC 40T125μ

8					TOLERANCE						
7					UNLESS SPECIFIED						
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版		ZENQ. CHEN	
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.	
4	CONTACT	SUS	1	Ag CLAD	TITLE : Micro SWitch			UNIT : mm	DRWG NO.: XB-FSK-18-D-1211		
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEI:			SCALE: 5:1	DWN.	JUN. YANG	2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			CHK'D	DONG. PANG	2012-9-25	
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN	2012-9-25	
NO.	PARTS	MATERIALS	Q'TY	FINISH							