
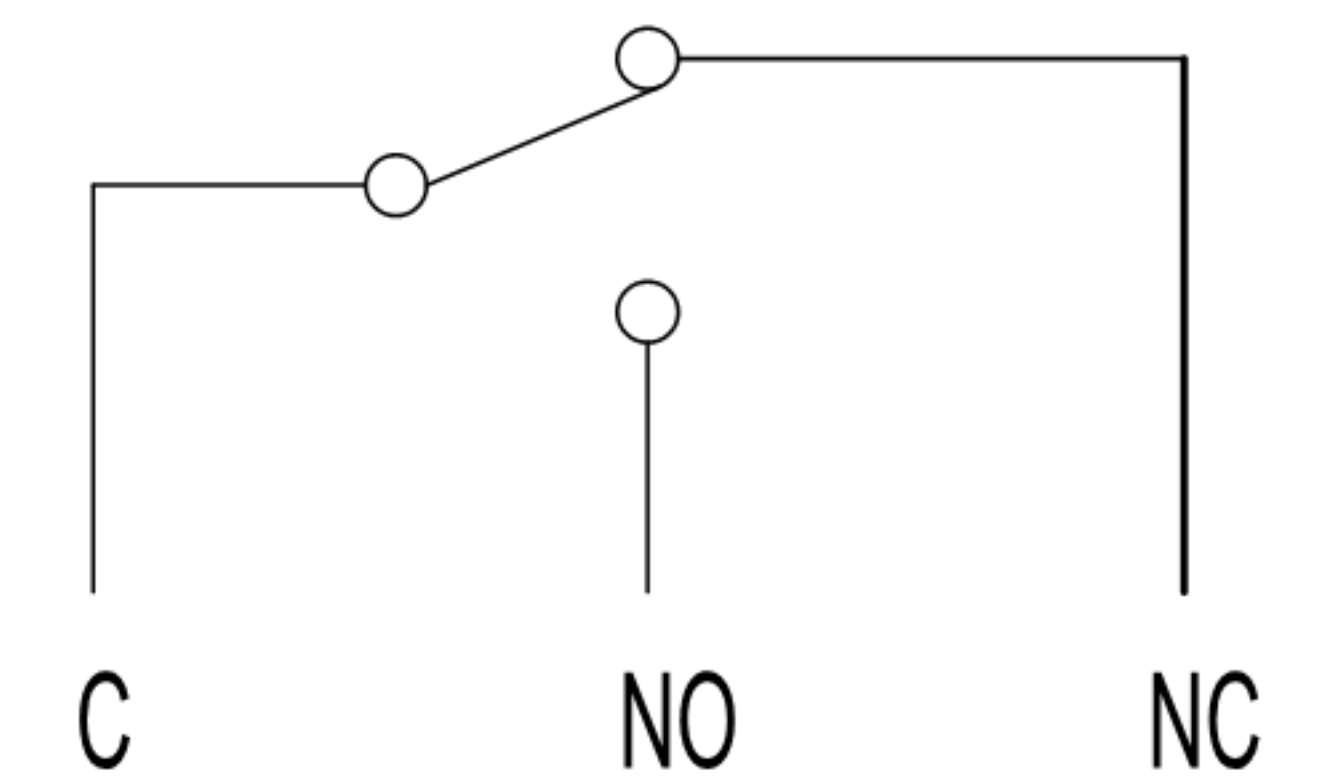
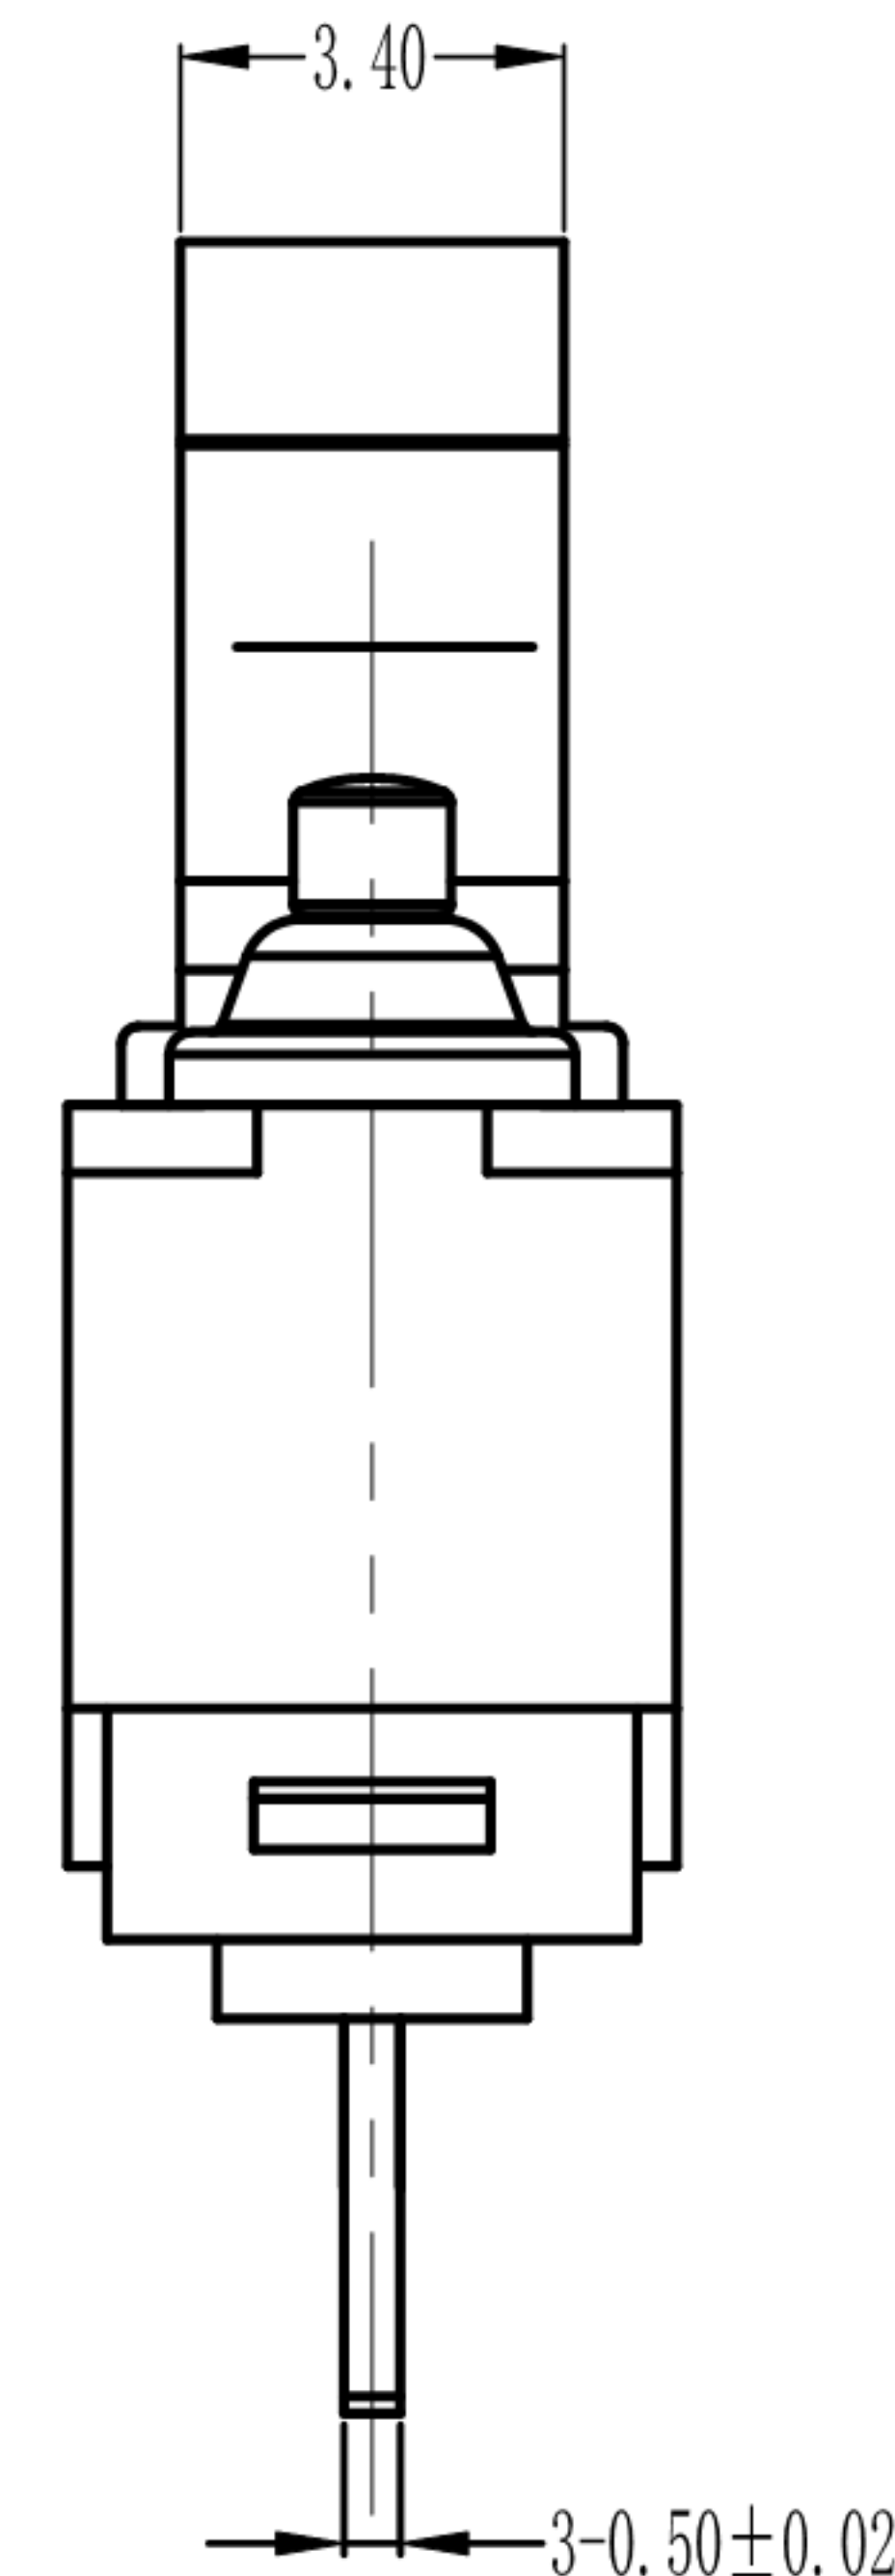


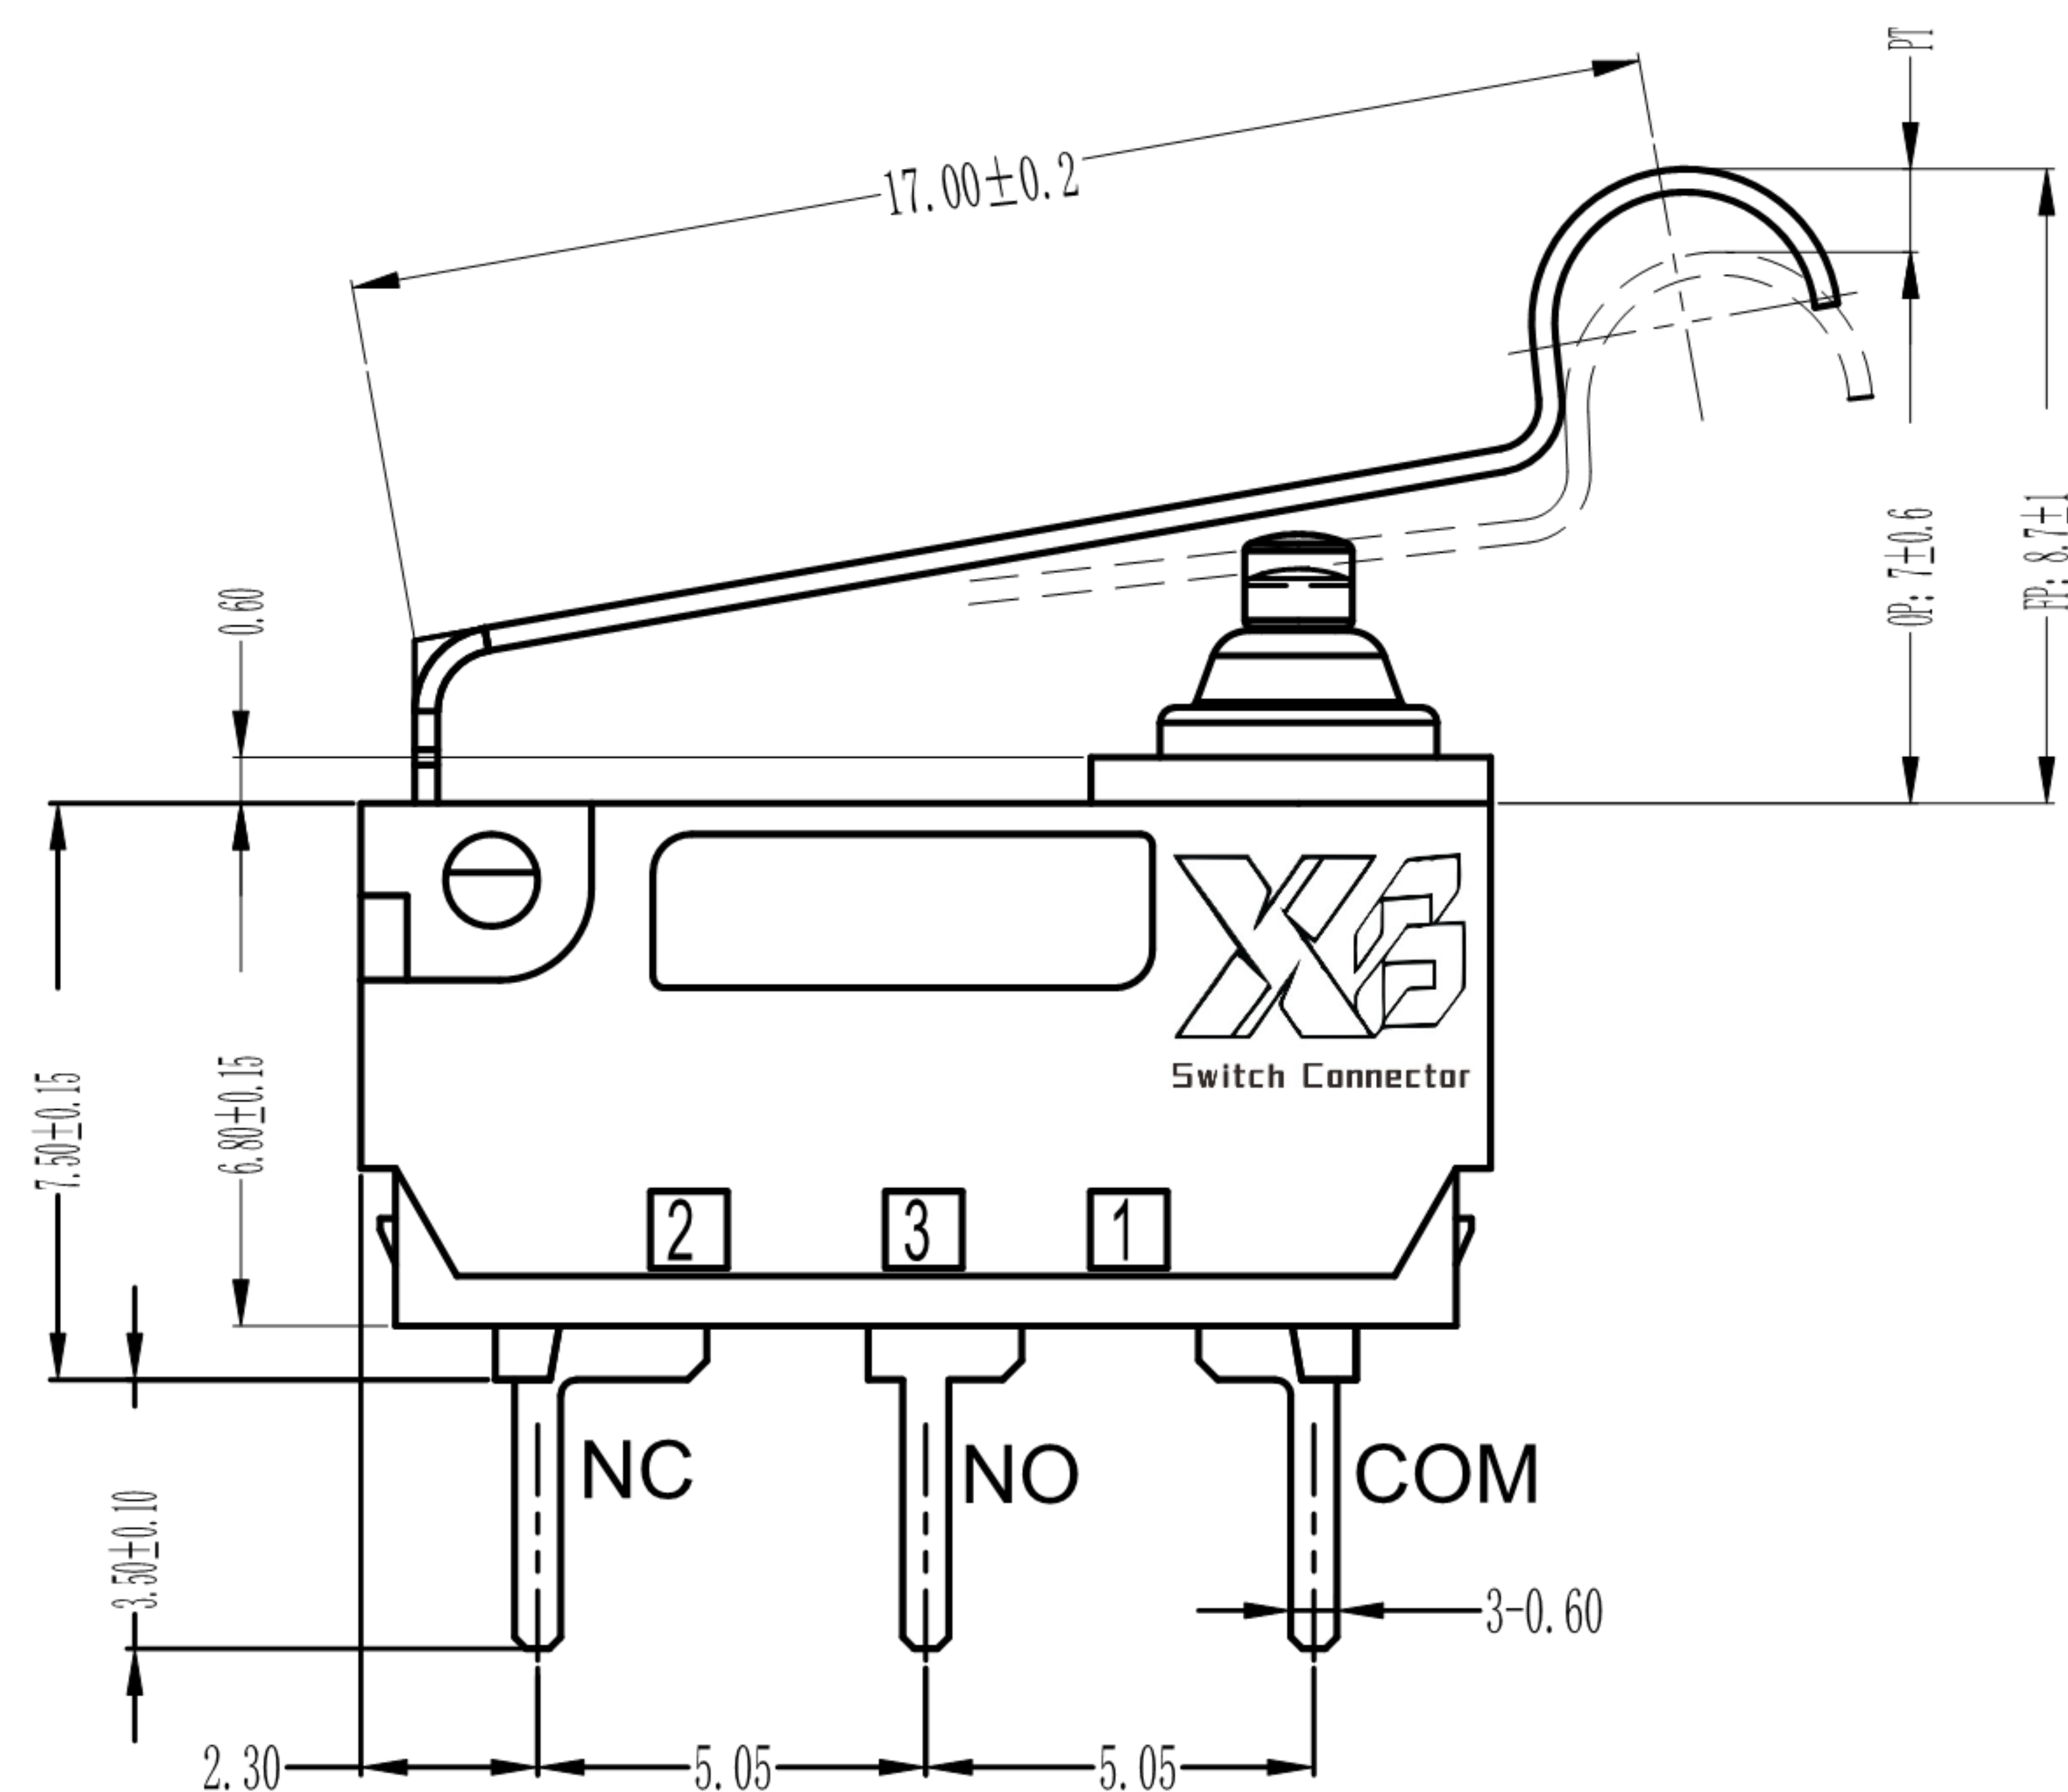

SCHEMATIC

1. 技术参数(Technical Parameters)

序号	主要技术参数(Main Technical Parameters)
1	电气额定值(Electrical Rating): 0. 1A/48VDC 125/250VAC; 3A/12VDC;
2	电气寿命(Electrical lifetime): 1E5 cycles
3	机械寿命(Mechanical lifetime): Min.1E5 cycles
4	接触电阻(Contact Resistance): $\leq 50\text{m}\Omega$
5	操作力(Operating force): 1. 75N MAX
6	自由位置(Free position): $8. 7\pm 1\text{mm}$
7	动作位置(Operation Position): $7. 0\pm 0. 6\text{mm}$
8	动作行程(Pretravel): 3. 8mm MAX (压杆处测量)
9	耐压(Withstand Voltage): 脚与脚 750V/5S/5mA; 脚与壳 1500/5S/5mA
10	绝缘电阻(Insulation Resistance): $\geq 100\text{M}\Omega$ (Test Voltage 500VDC)
11	漏电起痕指数Proof Tracking Index (PTI): 175V
12	环境温度(Ambient temperature): 40T85
13	防护等级: IP67

8					TOLERANCE UNLESS SPECIFIED						
7											
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版		ZENQ. CHEN	
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.	
4	CONTACT	SUS	1	Ag CLAD	TITLE : Micro Switch			UNIT : mm	DRWG NO.: XB-FSK-20-069		
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEI:			SCALE: 5:1	DWN.	JUN. YANG	2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED							
1	KNOB	PPA	1	BLACK	 东莞市溪榜电子有限公司			CHK'D	DONG. PANG	2012-9-25	
NO.	PARTS	MATERIALS	Q'TY	FINISH	Switch Connector DONG GUAN XI BANG ELECTRONI CS CO., LTD.			APPD.	ZENQ. CHEN	2012-9-25	