



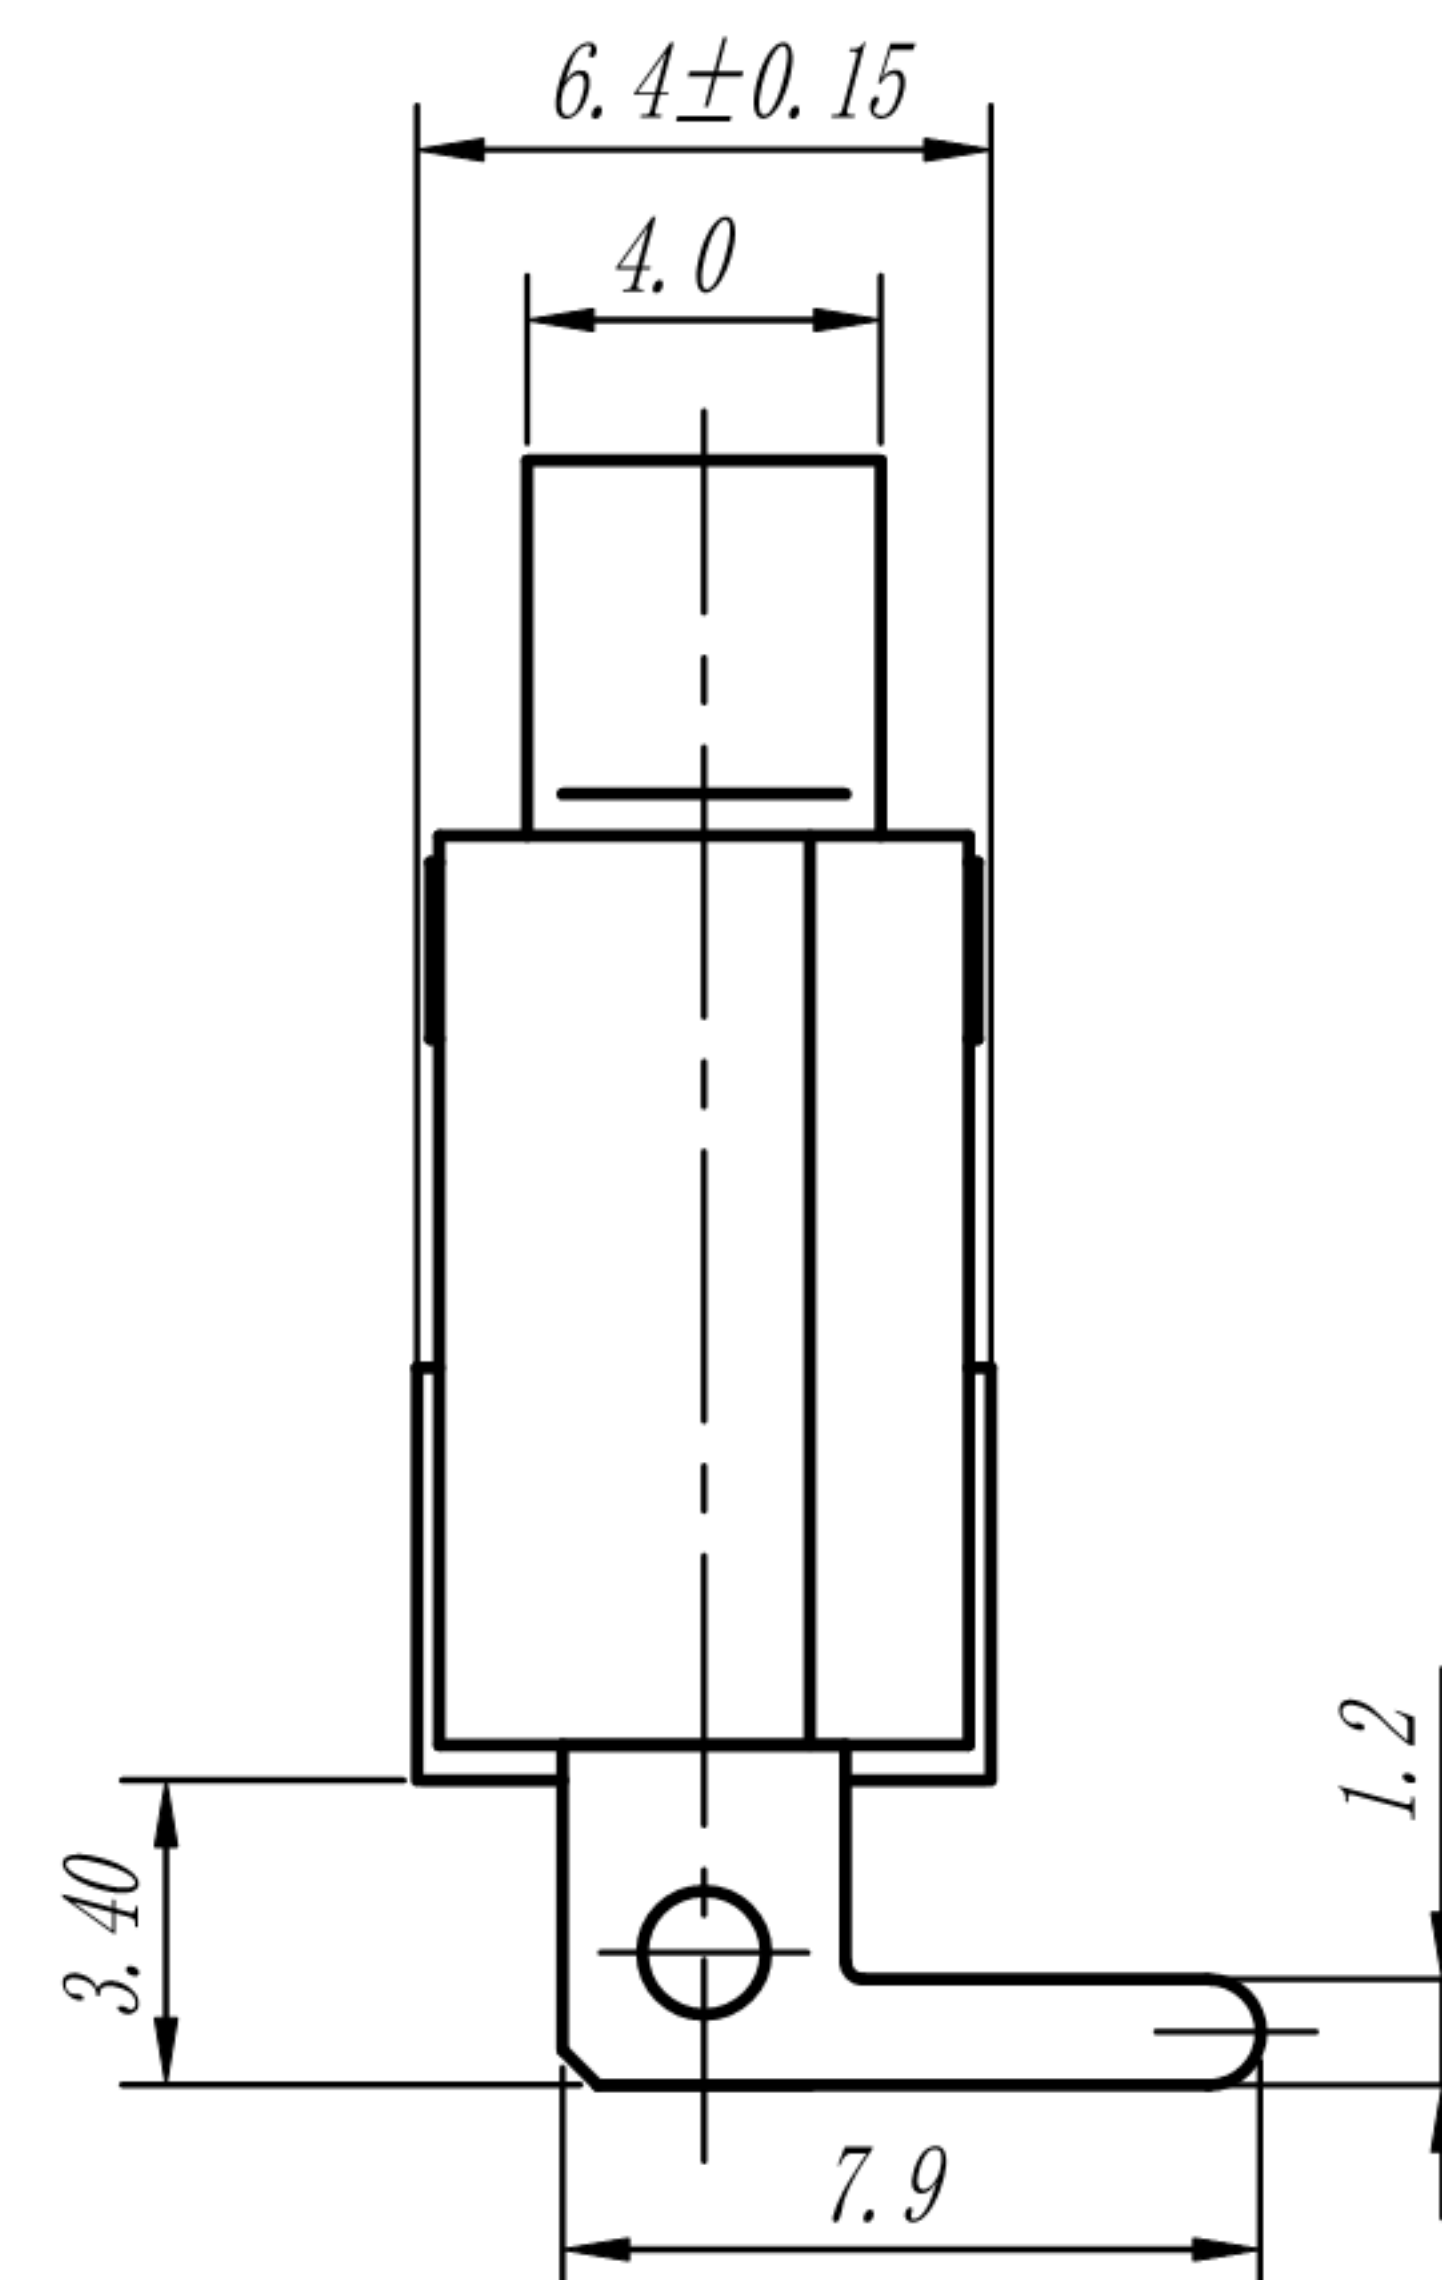

3. 电路简图

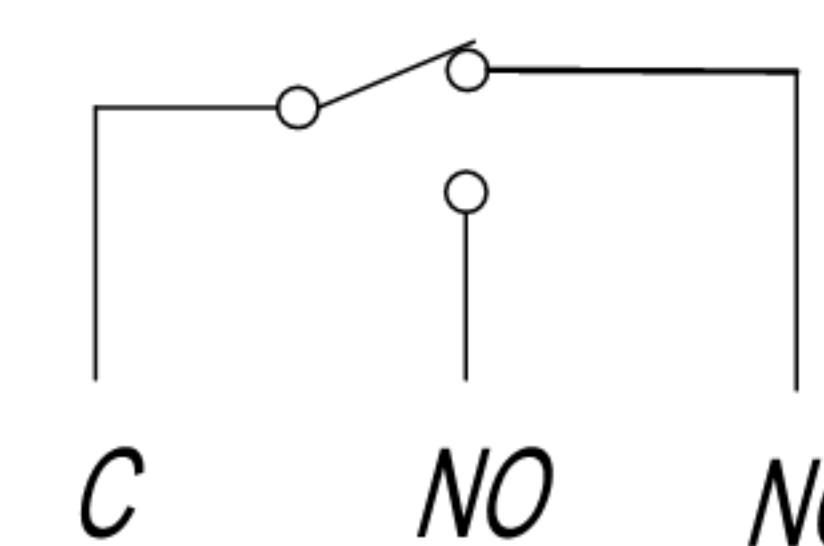

SCHEMATIC

2. 认证:


 5A/10A 250V~ T105
 5A/10A 250VAC T105/T125 μ

 5A 125V~ T105 μ
 5(1)A 250V~ 25T105 μ

1. 主要技术参数表

1	电气额定值: 5A/10A 250VAC
2	温度等级: T105
3	接触电阻: $\leq 50\text{m}\Omega$
4	操作力 (OF): $\geq 0.25\text{N}$ (压杆处测量)
5	自由位置 (FP): 17.0 ± 1
6	绝缘电阻: $\geq 100\text{M}\Omega$ (试验电压 500VDC)
7	耐压: 端一端500VAC/60S; 端一壳1500VAC/60S, 漏电流5mA

8					TOLERANCE							
7					UNLESS SPECIFIED							
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版			ZENQ. CHEN	
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION			APPD.	
4	CONTACT	SUS	1	Ag CLAD	TITLE : Micro SWitch				UNIT : mm	DRWG NO.: XB-HK-04G-3AZ-232		
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEI:				SCALE: 5:1	DWN.	JUN. YANG	2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.				CHK'D	DONG. PANG	2012-9-25	
1	KNOB	PPA	1	BLACK					APPD.	ZENQ. CHEN	2012-9-25	
NO.	PARTS	MATERIALS	Q'TY	FINISH								