

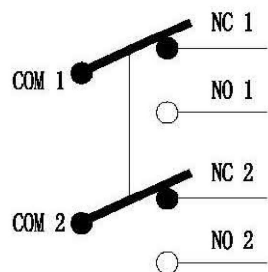
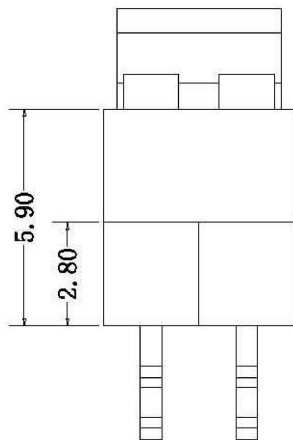
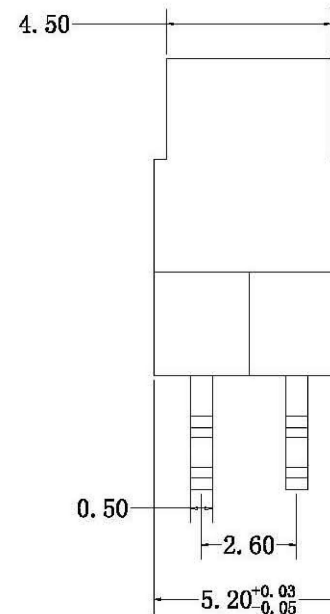


Rating	DC30V 100mA	Electrical Life	30,000 cycles
Contact Resistance	200mΩ Max	Mechanical Life	30,000 cycles
Insulation Resistance	>100MΩ DC250V	Ambient Temper. Used	-25℃ to +85℃
Withstand Voltage	AC250V 1min.	Ambient Humidity Used	≤85% at +40℃
Soldering Temper.	235±5℃ 5s	Operating Force	15 ±10gf



电路图
双联单控

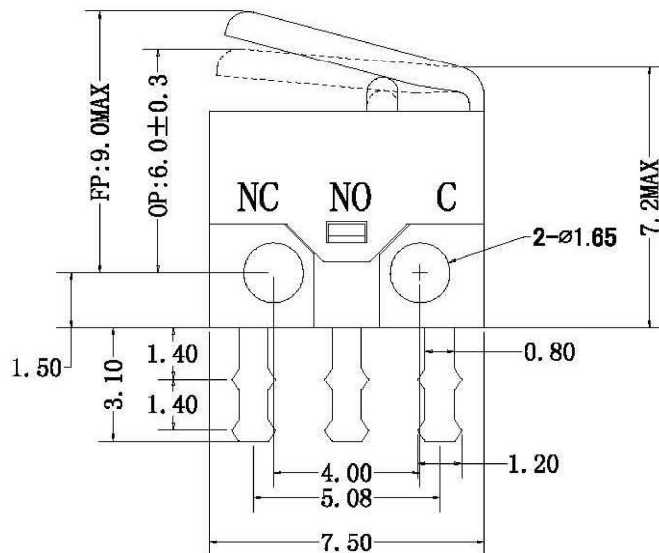

7	触点	2	Ag	
6	端子	2	C2680	
5	按钮	2	PBT	
3	弹片	2	C17200 brush	
2	盖片	1	PA66	
1	底座	2	PA66	
序号	零件名称	数量	材质	备注



东莞市溪榜电子有限公司

DONG GUAN XI BANG ELECTRONICS CO., LTD.

审核 CHECKED		比例 SCALE	1:1	名称 TITLE	超小型微动开关(双联开关)			
核准 APPROVE		张数 SHEET	1/1	料号 P/N NO.				
一般公差 TOLERANCE	±0.20	单位 UNIT	mm	模具编号 P/N NO.				
	±0.15	角度 ANGLES	±2.0°	纸张 SIZE	A4	角法 P.R.O.J.		工程图 ENG. DRAW



工程圖
ENG DRAW